


B-LINE LINEAR DIRECT



CERTIFICATIONS & COMPLIANCE

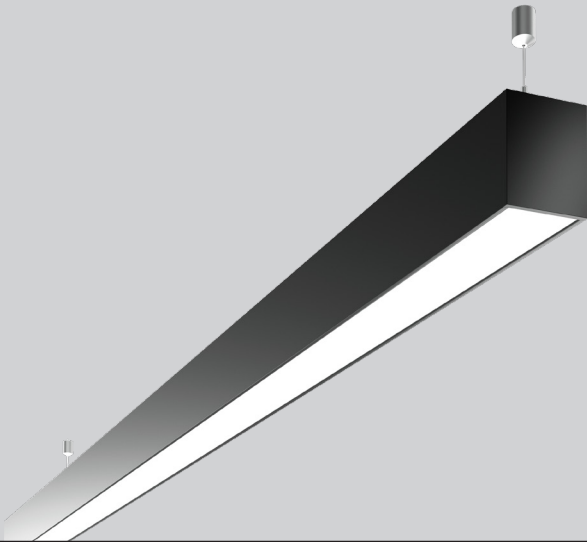


FEATURES

5 YEAR
limited
led warranty




PERFORMANCE

- Up to 98lm/W efficiency
- 400 / 800lm/ft
- CRI > 80 & CRI > 90




MOUNTING

Ceiling



Pendant



PATTERNS



*X Shapes Angular Curves Rectangular *T Shapes

For customization, please contact customer service

Catalog Number Example

BLINE2.5-SUR-BL-OP-27K-C80-UNV-010V-0400LF-NLC-ST-24IN

A B C D E F G H J K L M

A RANGE

LINEAR B - L I N E 2 . 5

B MOUNTING

QS Surface	SUR
Surface in-line ACT T-BAR	SAT
Surface in-line ACT SLOT	SAS
Surface ACT center tile	SAC
QS Pendant	PDT
Pendant in-line ACT T-BAR	PAT
Pendant in-line ACT SLOT	PAS
Pendant ACT center tile	PAC

pendant suspension set includes cable suspension and one white power feeder with a white junction box cover

Wall mounted W A L

for black power feeds or junction box covers, please contact customer service

C COLOR

QS White	WH
QS Black	BL
Gray	GR
Custom color RAL	XX

D LENS

HP opal cover O P

E CCT

2700K	27K
QS 3000K	30K
QS 3500K	35K
4000K	40K

F CRI

CRI > 80	C80
CRI > 90	C90

G VOLTAGE

120V / 277V UNV

H DIMMING

QS 0-10V 1%	010V
Lutron EcoSystem	LES1
Quantum, Vive, GRAFIK Eye, HomeWorks	
Power over ethernet	POEC
consult customer service for compatibility	
Custom dimming	XXXX
consult customer service for compatibility	

I SENSOR (optional)

Integrated Sensor SEN
consult customer service for sensor request

J OUTPUT LM/FT

QS 500lm/ft 100% ↓	0500LF
QS 750lm/ft 100% ↓	0750LF
QS 1000lm/ft 100% ↓	1000LF
Custom lm/ft	XXXXLF

custom lumen up to 1000 lm/ft

K CIRCUIT / EM

QS Single circuit	*
EMC night light circuit	NLC
EMB available in 4ft and 8ft	EM#

* leave blank

L SHAPE / PATTERN

QS Linear / straight	ST
QS Linear / straight + flex inset	SF

includes 1ft. field-cutttable section; only available for 4' and 8' segments

L-shape	LS
□-shape (rectangular shape)	RS
U-shape	US
Custom shape	XX

M DIMENSIONS IN INCH

Linear 2'	24IN
QS Linear 4'	48IN
QS Linear 6'	72IN
QS Linear 8'	96IN
Linear custom	###IN
L-Shape	###X###IN
U-Shape	###X###X###IN
□-Shape	###X###IN

for lengths including flex insets, round up to the nearest total foot length

N CERTIFICATION (optional)

Red List Approved RLA

Technical data

BASO 1.5 DIRECT

LUMEN OUTPUT MULTIPLIER*

Color Temperature

CRI

Delivered Lumens	CCT	CRI	Input Watts	Luminaire Efficacy		80+	90+
500 lm/ft ↕	4000K	CRI > 80	3.9 W/ft	103 lm/W	4000K	1	0.86
750 lm/ft ↕	4000K	CRI > 80	5.9 W/ft	102 lm/W	3500K	0.96	0.84
1000 lm/ft ↕	4000K	CRI > 80	8.2 W/ft	98 lm/W	3000K	0.95	0.82
					2700K	0.91	0.78

*To calculate the color temperatures >4000K and CRI 90, multiply the values in the lumen output tables.

Patterns top view


LINEAR

A	FIXTURES	CODE
48"	1 × 4' linear	ST - 0 4 F T
96"	1 × 8' linear	ST - 0 8 F T
144"	3 × 4' linear	ST - 1 2 F T




L-SHAPE

A / B	FIXTURES	CODE
48" / 48"	2 × 2' linear + 1 × 2' × 2' corner	LS - 0 4 X 0 4 F T
48" / 96"	1 × 2' linear + 1 × 6' linear + 1 × 2' × 2' corner	LS - 0 4 X 0 8 F T
96" / 96"	2 × 6' linear + 1 × 2' × 2' corner	LS - 0 8 X 0 8 F T




□-SHAPE (rectangular shape)

A / B	FIXTURES	CODE
48" / 48"	4 × 2' × 2' corner	RS - 0 4 X 0 4 F T
48" / 96"	2 × 4' linear + 4 × 2' × 2' corner	RS - 0 4 X 0 8 F T
96" / 96"	4 × 4' linear + 4 × 2' × 2' corner	RS - 0 8 X 0 8 F T



U-SHAPE

A / B / C	FIXTURES	CODE
48" / 48" / 48"	2 × 2' linear + 2 × 2' × 2' corner	US - 0 4 X 0 4 X 0 4 F T
48" / 96" / 48"	1 × 4' linear + 2 × 2' linear + 2 × 2' × 2' corner	US - 0 4 X 0 8 X 0 4 F T
48" / 144" / 48"	1 × 8' linear + 2 × 2' linear + 2 × 2' × 2' corner	US - 0 4 X 1 2 X 0 4 F T



DIMENSIONS




B-LINE 2.5

SURFACE

direct

wall




linear 4ft / 8ft

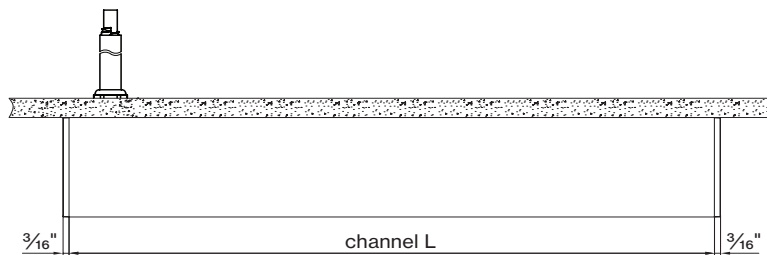

direct

direct / indirect

linear 4ft / 8ft

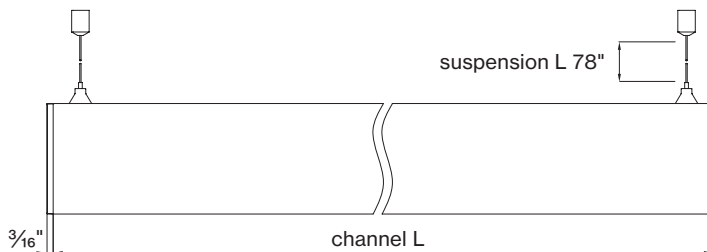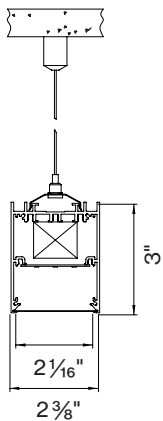

B-LINE 2.5 mounting instructions

Get access to the B-LINE 2.5 mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/baso>

