

BASO 1.5 LOUVER DIRECT

Catalog Number Example

BASO 1.5-SUR-WH-LBM-30K-C80-UNV-010V-SEN-0400LF-NLC-ST-24IN

A RANGE

BASO 1.5 BASO 1.5

B MOUNTING

Surface SUR
 Surface in-line ACT T-BAR SAT
 Surface in-line ACT SLOT SAS
 Surface ACT center tile SAC
 Pendant PDT
 Pendant in-line ACT T-BAR PAT
 Pendant in-line ACT SLOT PAS
 Pendant ACT center tile PAC

pendant suspension set includes cable suspension and one white power feeder with a white junction box cover

for black power feeds or junction box covers, please contact customer service

C COLOR

White WH
 Black BL
 Gray GR
 Custom color RAL XX

trimless version available in white only

D LENS

Louver black matte LBM
 Louver black gloss LBG
 Louver white matte LWM
 Louver white gloss LWG
 Louver chrome LCH

E CCT

3000K 30K
 3500K 35K
 4000K 40K
 Custom CCT XXX

F CRI

CRI > 80 C80
 CRI > 90 C90

G VOLTAGE

120V / 277V UNV

H DIMMING

0-10V 1% 010V
 Lutron EcoSystem LES1
 Quantum, Vive, GRAFIK Eye,
 HomeWorks

Power over ethernet POEC
 consult customer service for compatibility
 Custom dimming XXXX
 consult customer service for compatibility

I SENSOR (optional)


Integrated Sensor SEN
 consult customer service for sensor request

J OUTPUT LM/FT

400lm/ft 100% ± 0400LF
 600lm/ft 100% ± 0600LF
 800lm/ft 100% ± 0800LF
 Custom lm/ft XXXXLF

Custom output up to 800 lm/ft
 see lumen output multiplier table on
 page 2 for all lens colors outputs.
 Multiplier for Direct Lens ONLY




K CIRCUIT / EM

 Single circuit *
 EMC night light circuit NLC
 * leave blank

L SHAPE / PATTERN

Linear / straight ST

M DIMENSIONS IN INCH

Linear 2' 24IN
 Linear 4' 48IN
 Linear 6' 72IN
 Linear 8' 96IN
 Linear custom ###IN


custom combinations including opal
 lens or wallwash optics available,
 please contact customer service with a
 drawing of your request

N CERTIFICATION (optional)

Red List Approved RLA

PERFORMANCE

- Up to 118lm/W efficiency
- 400 / 400 / 800lm/ft
- CRI > 80 & CRI > 90
- IC & Damp rated
- UGR < 17





MOUNTING


Recessed

Surface

Pendant



MULTIPLE LENS COMBINATIONS

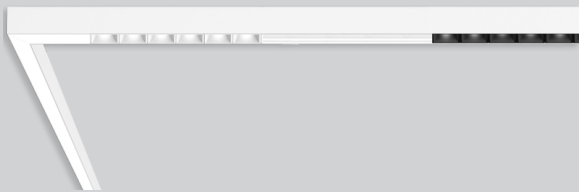


Contact customer service with a drawing of your request.

INNOVATIONS



[link to page](#)

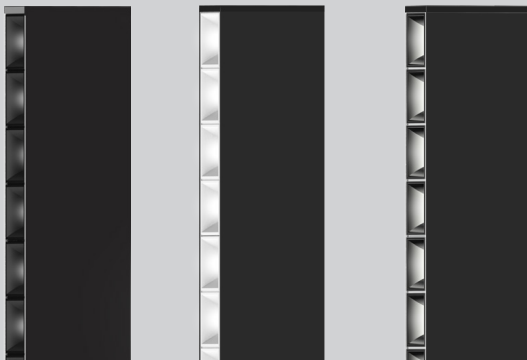

BASO
 basolighting.com
 xalusa.com


Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
BASO 1.5 LOUVER DIRECT								
e LED	4' linear	30K, 35K, 40K	16.4W	1600lm	100% down	400lm/ft	67%	103lm/W
	8' linear		32.8W	3200lm				
e ² LED	4' linear	30K, 35K, 40K	25.6W	2400lm	100% down	600lm/ft	67%	98lm/W
	8' linear		51.2W	4800lm				
e ²⁺ LED	4' linear	30K, 35K, 40K	35W	3200lm	100% down	800lm/ft	67%	92lm/W
	8' linear		70W	6400lm				

	LOR	LUMEN MULTIPLIER	DELIVERED LM/FT	DELIVERED LM/FT	DELIVERED LM/FT
LOUVER LENS					
LOUVER Matte White	67.3	1	400 lm/ft	600 lm/ft	800 lm/ft
LOUVER Glossy White	65.5	0.97	388 lm/ft	582 lm/ft	776 lm/ft
LOUVER Matte Black	49.4	0.73	293 lm/ft	439 lm/ft	585 lm/ft
LOUVER Glossy Black	49.1	0.73	293 lm/ft	439 lm/ft	582 lm/ft
LOUVER Chrome	65.4	0.97	388 lm/ft	582 lm/ft	776 lm/ft

Multiplier for direct lens ONLY

Multiple lens combinations available

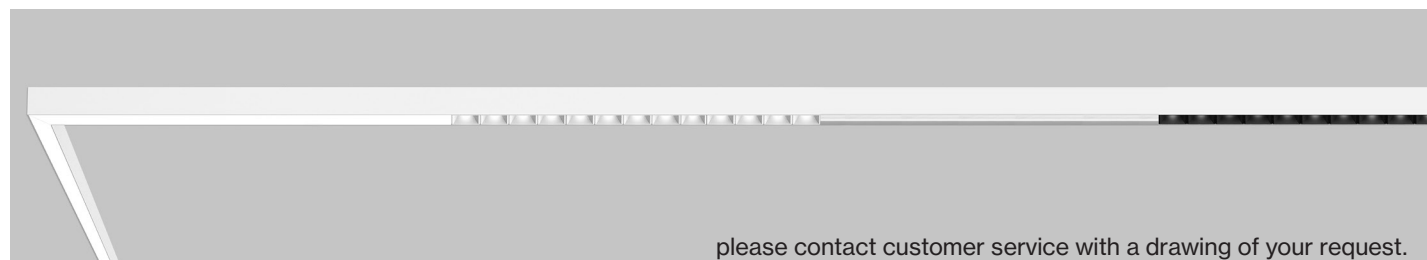


please contact customer service with a drawing of your request.

Patterns top view

LINEAR


A	FIXTURES	CODE
48"	1 × 4' linear	ST - 0 4 FT
96"	1 × 8' linear	ST - 0 8 FT
144"	3 × 4' linear	ST - 1 2 FT



DIMENSIONS

BASO 1.5 LOUVER


SURFACE direct

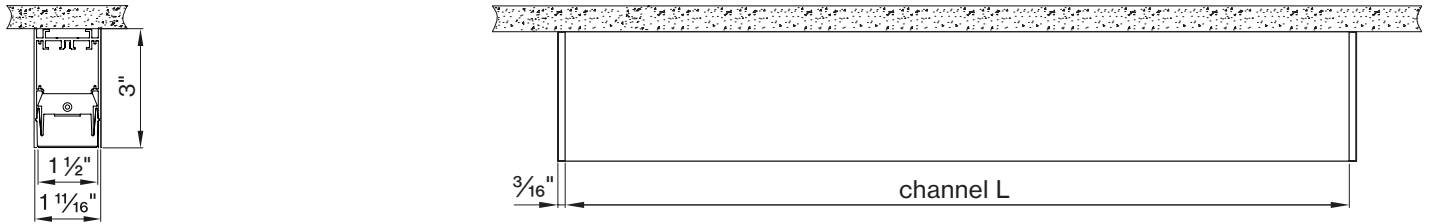

PENDANT

direct

direct / indirect

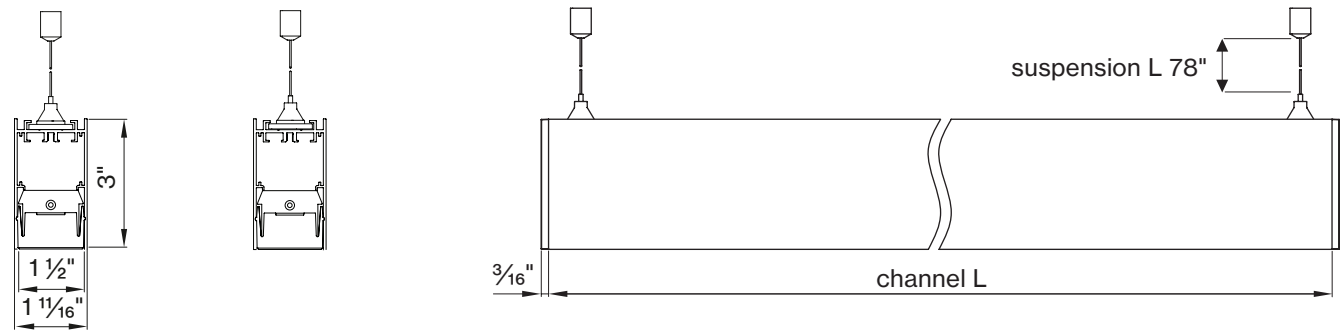

BASO 1.5 Louver SPECIALITY MOUNTING

SURFACE in-line ACT TBAR

SURFACE in-line ACT SLOT

SURFACE ACT center tile

