

# BASO 4.0 DIRECT



## Catalog Number Example

BASO 4.0-SAT-BL-OP-30K-C80-UNV-010V-SEN-955LF-NLC-ST-96IN

### A RANGE

BASO 4.0      B A S O 4 . 0

### B MOUNTING

**QS** Surface      S U R  
 Surface in-line ACT T-BAR      S A T  
 Surface in-line ACT SLOT      S A S  
 Surface ACT center tile      S A C  
**QS** Pendant      P D T  
 Pendant in-line ACT T-BAR      P A T  
 Pendant in-line ACT SLOT      P A S  
 Pendant ACT center tile      P A C

pendant suspension set includes cable suspension and one white power feeder with a white junction box cover

Wall mounted      W A L

for black power feeds or junction box covers, please contact customer service

### I SENSOR (optional)

Integrated Sensor      S E N  
 consult customer service for sensor request

### J OUTPUT LM/FT

**QS** 500lm/ft 100% ↓      0 5 0 0 L F  
**QS** 750lm/ft 100% ↓      0 7 5 0 L F  
**QS** 1000lm/ft 100% ↓      1 0 0 0 L F  
 Custom lm/ft      X X X X L F  
*custom lumen up to 1400 lm/ft*

### K CIRCUIT / EM

**QS** Single circuit      \*  
 EMC night light circuit      N L C  
 EMB available in 4ft and 8ft      E M #  
 \*leave blank

### C COLOR

**QS** White      W H  
**QS** Black      B L  
 Gray      G R  
 Custom color RAL      X X

trimless version available in white only

### L SHAPE / PATTERN

**QS** Linear / straight      S T  
 Linear / straight + flex inset      S F  
 includes 4ft. field-cutttable section  
 L-shape      L S  
 □-shape (rectangular shape)      R S  
 U-shape      U S  
 Custom shape      X X

### D LENS

HP opal cover      O P

### E CCT

2700K      2 7 K  
**QS** 3000K      3 0 K  
**QS** 3500K      3 5 K  
 4000K      4 0 K

### M DIMENSIONS IN INCH

Linear 2'      2 4 I N  
**QS** Linear 4'      4 8 I N  
**QS** Linear 6'      7 2 I N  
**QS** Linear 8'      9 6 I N  
 Linear custom      # # # I N  
 Linear flex inset      # # # I N  
 includes 4' to 3' field-cutttable section  
 L-Shape      # # # X # # # I N  
 U-Shape      # # # X # # # X # # # I N  
 □-Shape      # # # X # # # I N

for lengths including flex insets, round up to the nearest **total** foot length

### F CRI

CRI > 80      C 8 0  
 CRI > 90      C 9 0

### G VOLTAGE

120V/277V      U N V

### N CERTIFICATION (optional)


Red List Approved      R L A

### H DIMMING


**QS** 0-10V 1%      0 1 0 V  
 Lutron EcoSystem      L E S 1  
 Quantum, Vive, GRAFIK Eye, HomeWorks  
 Power over ethernet      P O E C  
 consult customer service for compatibility  
 Custom dimming      X X X X  
 consult customer service for compatibility

## PERFORMANCE


- Up to 111lm/W efficiency
- 500 / 955 lm/ft
- CRI > 80 & CRI > 90
- Damp rated



## MOUNTING

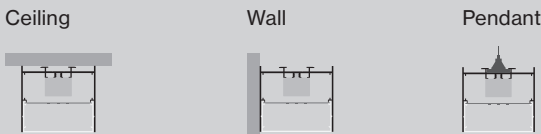

## PATTERNS

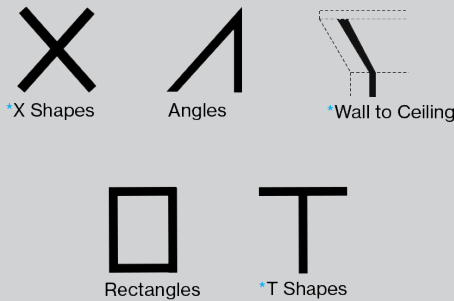


For customization, please contact customer service

## FIELD-CUTTABLE FLEX

Down to 1/16"





[link to video](#)

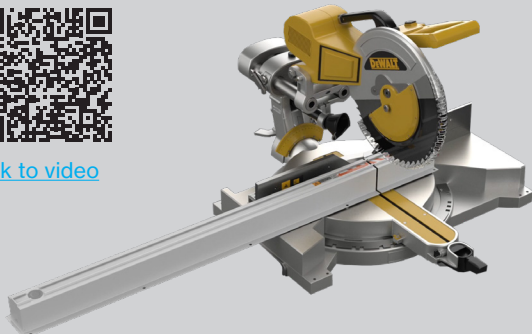

**BASO**  
 basolighting.com  
 xalusa.com

### Technical data


	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY	
<b>BASO DIRECT</b>										
	e LED	2' linear	40K	9W	910lm	100% down	500lm/ft	-	76%	111lm/W
		4' linear		18W	2000lm					
		6' linear		27W	3000lm					
		8' linear		36W	4000lm					
		2' + 2' corner		18W	2000lm					
	e <sup>2</sup> LED	2' linear	40K	18W	1920lm	100% down	955lm/ft	-	76%	106lm/W
		4' linear		36W	3840lm					
		6' linear		54W	5730lm					
		8' linear		72W	7680lm					
		2' + 2' corner		36W	3840lm					

for 30 K or 35 K multiply lm value by 0.96

### Patterns top view


#### LINEAR

A	FIXTURES	CODE
48"	1 x 4' linear	ST - 0 4 FT
96"	1 x 8' linear	ST - 0 8 FT
144"	3 x 4' linear	ST - 1 2 FT




#### L-SHAPE

A / B	FIXTURES	CODE
48" / 48"	2 x 2' linear + 1 x 2' x 2' corner	LS - 0 4 X 0 4 FT
48" / 96"	1 x 2' linear + 1 x 6' linear + 1 x 2' x 2' corner	LS - 0 4 X 0 8 FT
96" / 96"	2 x 6' linear + 1 x 2' x 2' corner	LS - 0 8 X 0 8 FT



#### □-SHAPE (rectangular shape)

A / B	FIXTURES	CODE
48" / 48"	4 x 2' x 2' corner	RS - 0 4 X 0 4 FT
48" / 96"	2 x 4' linear + 4 x 2' x 2' corner	RS - 0 4 X 0 8 FT
96" / 96"	4 x 4' linear + 4 x 2' x 2' corner	RS - 0 8 X 0 8 FT



#### U-SHAPE

A / B / C	FIXTURES	CODE
48" / 48" / 48"	2 x 2' linear + 2 x 2' x 2' corner	US - 0 4 X 0 4 X 0 4 FT
48" / 96" / 48"	1 x 4' linear + 2 x 2' linear + 2 x 2' x 2' corner	US - 0 4 X 0 8 X 0 4 FT
48" / 144" / 48"	1 x 8' linear + 2 x 2' linear + 2 x 2' x 2' corner	US - 0 4 X 1 2 X 0 4 FT

