


BASO 2.5 WET DIRECT



PERFORMANCE

- Up to 108 lm/W efficacy
- 455 / 750 lm/ft
- CRI > 80 & CRI > 90
- IP54, wet rated




MOUNTING

Recessed with Trim



DIMENSIONS

TRIM



PROTECTIVE LIGHTING



[link to video](#)



Catalog Number Example

BASO 2.5-IP-RTR-WH-OP-30K-C80-UNV-010V-455LF-ST-72IN

A RANGE

BASO 2.5 BASO 2.5

H VOLTAGE

120V / 277V UNV

B SUB CATEGORY

IP54 rated IP

I DIMMING

0-10V 1% 0 10 V

DALI DALI

Lutron EcoSystem LES 1

Quantum, Vive, GRAFIK Eye,

HomeWorks

Custom dimming XXXX

consult customer service for compatibility

C MOUNTING

Recessed with Trim RTR

D COLOR

White WH

Black BL

Gray GR

Custom color RAL XX

J OUTPUT LM/FT

455lm/ft 100% ↓ 0 4 5 5 L F

750lm/ft 100% ↓ 0 7 5 0 L F

Custom lm/ft XXXXL F

E LENS

HP opal cover OP

K CIRCUIT / EM

Single circuit *

F CCT

3000K 30K

3500K 35K

4000K 40K

Custom CCT XXX

L SHAPE / PATTERN

Linear / straight ST

M DIMENSIONS IN INCH

Linear 2' 24 IN

Linear 3' 36 IN

Linear 4' 48 IN

Linear 5' 60 IN

Linear 6' 72 IN

Linear 7' 84 IN

Linear 8' 96 IN



G CRI

CRI > 80 C80

CRI > 90 C90

BASO
basolighting.com
xalusa.com

Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
BASO DIRECT 	4' linear	40K	16.8W	1820lm	100% down	455 lm/ft	-	66%	108 lm/W
	8' linear		33.6W	3640lm					
	4' linear	40K	29.6W	3010lm	100% down	750 lm/ft	-	66%	101 lm/W
	8' linear		59.2W	6020lm					

for 30K or 35K multiply lm value by 0.96

Patterns top view



LINEAR

A	FIXTURES	CODE
48"	1x 4' linear	ST - 4 8 I N
72"	1x 6' linear	ST - 7 2 I N
96"	1x 8' linear	ST - 9 6 I N



BASO 2.5 IP 54 Dimensions

RECESSED with trim

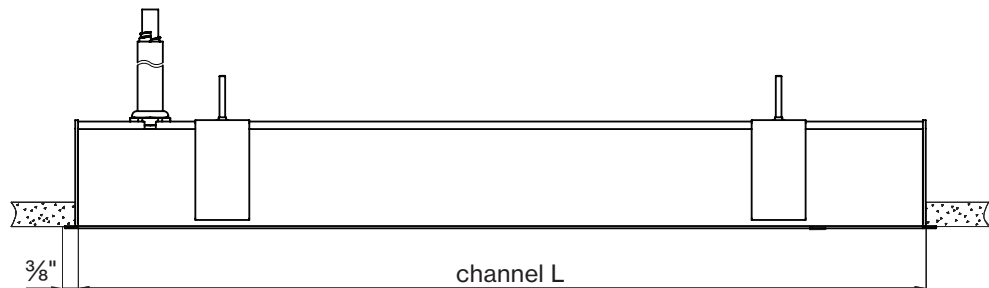

BASO mounting instructions

Get access to the BASO 2.5 IP54 mounting instructions faster by scanning the QR code.

www.xalusa.com/resources/mounting-instructions/baso

