

BASO 2.5 WET DIRECT



Catalog Number Example

BASO 2.5-IP-RTR-WH-OP-30K-C80-UNV-010V-455LF-ST-361N

A RANGE	BASO 2.5	BASO2.5	H VOLTAGE	120V / 277V	UNV
----------------	----------	---------	------------------	-------------	-----

B SUB CATEGORY	IP 54 rated	IP	I DIMMING	0-10V 1%	010V
				DALI	DALI
				Lutron EcoSystem	LES1
				Quantum, Vive, GRAFIK Eye, HomeWorks	
				Custom dimming	XXXX

C MOUNTING	Surface	SUR
	Pendant	PDT

for black power feeds or junction box covers, please contact customer service

J OUTPUT LM/FT	455lm/ft 100% ↓	0455LF
	750lm/ft 100% ↓	0750LF
	Custom lm/ft	XXXXLF

D COLOR	White	WH
	Black	BL
	Gray	GR
	Custom color RAL	XX

K CIRCUIT / EM	Single circuit	*
-----------------------	----------------	---

E LENS	HP opal cover	OP
---------------	---------------	----

L SHAPE / PATTERN	Linear / straight	ST
--------------------------	-------------------	----


F CCT	3000K	30K
	3500K	35K
	4000K	40K
	Custom CCT	XXX

M DIMENSIONS IN INCH	Linear 2'	24IN
	Linear 3'	36IN
	Linear 4'	48IN
	Linear 5'	60IN
	Linear 6'	72IN
	Linear 7'	84IN
	Linear 8'	96IN

G CRI	CRI > 80	C80
	CRI > 90	C90

PERFORMANCE

- Up to 108 lm/W efficiency
- 455 / 750lm/ft
- CRI > 80 & CRI > 90
- IP54, wet rated



MOUNTING

Surface



Pendant



DIMENSIONS

SURFACE

PENDANT





PROTECTIVE LIGHTING



[link to video](#)

BASO
basolighting.com
xalusa.com

Technical data


	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
BASO DIRECT									
	e LED 2' linear	40K	8.4W	910lm	100% down	455lm/ft	-	66%	108lm/W
	4' linear		16.8W	1820lm					
	6' linear		25.3	2740lm					
	8' linear		33.6W	3640lm					
	e ² LED 2' linear	40K	14.8W	1500lm	100% down	750lm/ft	-	66%	101lm/W
	4' linear		29.6W	3010lm					
	6' linear		44.6W	4510lm					
	8' linear		59.2W	6020lm					

for 30K or 35K multiply lm value by 0.96

Patterns top view



LINEAR

A	FIXTURES	CODE
48"	1x 4' linear	ST - 4 8 I N
72"	1x 6' linear	ST - 7 2 I N
96"	1x 8' linear	ST - 9 6 I N





BASO 2.5 IP 54 Dimensions

SURFACE direct

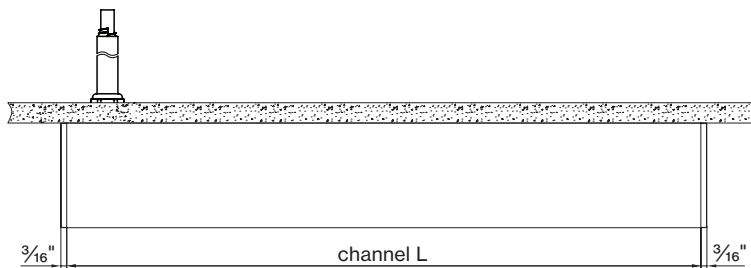

PENDANT direct

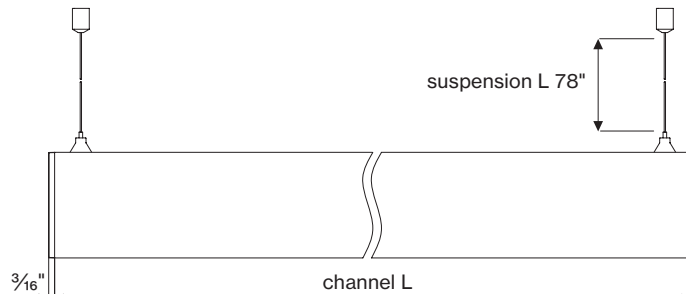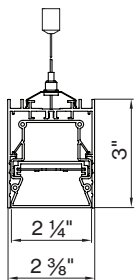

BASO mounting instructions

Get access to the BASO 2.5 IP54 mounting instructions faster by scanning the QR code.

www.xalusa.com/resources/mounting-instructions/baso

