
CURVE 2.5
DIRECT

5 YEAR limited led warranty



MOUNTING

Surface




Pendant



PERFORMANCE

- Up to 120lm/W efficiency
- 200 – 1200 delivered lm/ft
- CRI > 80 & CRI > 90
- Damp rated
- Customizable



COMPATIBLE CONTROLS & FEATURES


ATHENA WIRELESS NODE by LUTRON · nLIGHT · SENSOR READY · consult factory

CERTIFICATIONS & COMPLIANCE

BAA BABA · cULus · RoHS compliant · Declare. RedList Approved · TITLE 24 JA8


WHAT SHAPES YOU?

Combines with the BASO 2.5 system components

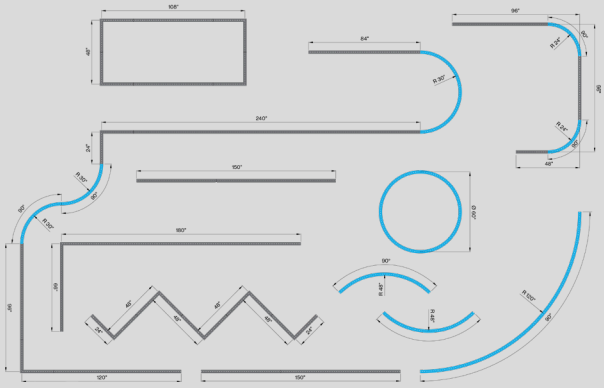


DIMENSIONS

SURFACE



PENDANT



Catalog Number Example

CURVE 2.5-SUR-WH-OP-30K-C80-UNV-010V-LUTA-0500LF-SC-RA-18IN-A90-BAA

A B C D E F G H I J K L M N

A RANGE

CURVE 2.5	C U R V E 2 . 5

B MOUNTING

Surface	S U R
Pendant	P D T

pendant suspension set includes cable suspension and one white power feeder with a white junction box cover

for black power feeds or junction box covers, please contact customer service

C COLOR

White	W H
Black	B L
Gray	G R
Custom color RAL	X X

D LENS

HP opal cover	O P

E CCT

2700 K	2 7 K
3000K	3 0K
3500K	3 5 K
4000K	4 0K
Custom CCT	X X K

F CRI

CRI > 80	C 8 0
CRI > 90	C 9 0

G VOLTAGE

120V / 277V	U N V

H DIMMING

0-10V 1% dimming	0 1 0 V
DALI	D A L I
Lutron Digital Dim	L T D
Power over ethernet consult factory	P O E C
Custom dimming consult factory	X X X X

I CONTROLS

No Controls	
Lutron Athena compatible	L U T A
nLight compatible	N L T
Integrated Sensor consult factory	S E N
Custom Controls consult factory	X X X X

*leave blank

J OUTPUT

500 lm/ft 5.0W	0 5 0 0 L F
750 lm/ft 7.3W	0 7 5 0 L F
1000 lm/ft 9.6W	1 0 0 0 L F
Custom lm/ft*	X X X X L F

*custom lumen from 200 up to 1200 lm/ft

Efficiencies based on CRI90
CRI80 values are up to 15% more efficient

K CIRCUIT / EM

Single circuit	S C

EMC or EMP not available

L RADIUS IN INCHES


18"	R A - 1 8 I N
24"	R A - 2 4 I N
30"	R A - 3 0 I N
36"	R A - 3 6 I N
48"	R A - 4 8 I N
60"	R A - 6 0 I N
120"	R A - 1 2 0 I N
Custom radii	R A - X X X I N

for custom radii, please contact customer service

M ANGLE

22.5° *	A 2 2
45° ≥ R36" only	A 4 5
90°	A 9 0
180°	A 1 8 0
Custom angle	A X X X

* ≥ R1 20" only; for custom angles, please contact customer service



N CERTIFICATION

No Certification	*
BAA Compliant	B A A
BABA Compliant	B A B A
Red List Approved	D R L A

*leave blank

BASO
basolighting.com

Technical data

CURVE 2.5 DIRECT

Delivered Lumens	CCT	CRI	Input Watts	Luminaire Efficacy
500 lm/ft ↧	4000K	CRI > 80 / 90	4.3 / 5.0 W/ft	115 / 100 lm/W
750 lm/ft ↧	4000K	CRI > 80 / 90	6.3 / 7.3 W/ft	118 / 103 lm/W
1000 lm/ft ↧	4000K	CRI > 80 / 90	8.3 / 9.6 W/ft	120 / 104 lm/W

DIRECT (CRI90)

	RADIUS SIZE	ANGLE	ARCLEN MECH	LEDs	ARCLEN EL	LUMEN OUTPUT (LM/FT)	POWER INPUT(W)	EFFICACY (LM/W)	LUMEN OUTPUT (LM/FT)	POWER INPUT(W)	EFFICACY (LM/W)	LUMEN OUTPUT (LM/FT)	POWER INPUT(W)	EFFICACY (LM/W)
90°	R 18"	90	2.4	120	2.5	500	12.5	100	750	18.3	103	1000	24.0	104
	R 24"	90	3.1	144	3	500	15.0	100	750	21.9	103	1000	28.8	104
	R 30"	90	3.9	192	4	500	20.0	100	750	29.2	103	1000	38.4	104
	R 36"	90	4.7	240	5	500	25.0	100	750	36.5	103	1000	48.0	104
	R 48"	90	6.3	288	6	500	30.0	100	750	43.8	103	1000	57.6	104
	R 60"	90	7.9	384	8	500	40.0	100	750	58.4	103	1000	76.8	104

for 30 K or 35 K multiply lm value by 0.96

	RADIUS SIZE	ANGLE	ARCLEN MECH	LEDs	ARCLEN EL	LUMEN OUTPUT (LM/FT)	POWER INPUT(W)	EFFICACY (LM/W)	LUMEN OUTPUT (LM/FT)	POWER INPUT(W)	EFFICACY (LM/W)	LUMEN OUTPUT (LM/FT)	POWER INPUT(W)	EFFICACY (LM/W)
45°	R 30"	45	2.0	96	2	500	10.0	100	750	14.6	103	1000	19.2	104
	R 36"	45	2.4	120	2.5	500	12.5	100	750	18.3	103	1000	24.0	104
	R 48"	45	3.1	144	3	500	15.0	100	750	21.9	103	1000	28.8	104
	R 60"	45	3.9	192	4	500	20.0	100	750	29.2	103	1000	38.4	104
	R 120"	45	7.9	384	8	500	40.0	100	750	58.4	103	1000	76.8	104

for 30 K or 35 K multiply lm value by 0.96


	RADIUS SIZE	ANGLE	ARCLEN MECH	LEDs	ARCLEN EL	LUMEN OUTPUT (LM/FT)	POWER INPUT(W)	EFFICACY (LM/W)	LUMEN OUTPUT (LM/FT)	POWER INPUT(W)	EFFICACY (LM/W)	LUMEN OUTPUT (LM/FT)	POWER INPUT(W)	EFFICACY (LM/W)
22.5°	R 60"	22.5	2.0	96	2	500	10.0	100	750	14.6	103	1000	19.2	104
	R 120"	22.5	3.9	192	4	500	20.0	100	750	29.2	103	1000	38.4	104

for 30 K or 35 K multiply lm value by 0.96

Patterns with BASO 2.5 top view


LINEAR

A	FIXTURES	CODE
48"	1 × 4' linear	ST - 48IN
96"	1 × 8' linear	ST - 96IN
144"	3 × 4' linear	ST - 144IN




L-SHAPE / J-SHAPE

A / B	FIXTURES	CODE
48" /48"	2 × 24" linear + 1 × 24"×24" corner or R 24" 90° curve	#S - 48X48IN
48" /96"	1 × 24" linear + 1 × 72" linear + 1 × 24"×24" corner or R 24" 90° curve	#S - 48X96IN
96" /96"	2 × 72" linear + 1 × 24"×24" corner or R 24" 90° curve	#S - 96X96IN




□-SHAPE / O-SHAPE

A / B	FIXTURES	CODE
48" / 48"	4 × 24"×24" corner or R 24" 90° curve	#S - 48X48IN
48" / 96"	2 × 48" linear + 4 × 24"×24" corner or R 24" 90° curve	#S - 48X96IN
96" / 96"	4 × 48" linear + 4 × 24"×24" corner or R 24" 90° curve	#S - 96X96IN



U-SHAPE / C-SHAPE


A / B / C	FIXTURES	CODE
48" /48" /48"	2 × 24" linear + 2 × 24"×24" corner or R 24" 90° curve	#S - 48X48X48IN
48" /96" /48"	1 × 48" linear + 2 × 24" linear + 2 × 24"×24" corner or R 24" 90° curve	#S - 48X96X48IN
48" /144" /48"	1 × 96" linear + 2 × 24" linear + 2 × 24"×24" corner or R 24" 90° curve	#S - 48X144X48IN




FULL CIRCLE DIMENSIONS

NOMINAL	ON-CENTER RADIUS	ON-CENTER DIAMETER	OUTSIDE DIAMETER	OUTSIDE CIRCUMFER.
Ø 36"	18"	Ø 36"	Ø 38⅜"	120 9⁄16"
Ø 48"	24"	Ø 48"	Ø 50⅜"	158¼"
Ø 60"	30"	Ø 60"	Ø 62⅜"	195 15⁄16"
Ø 72"	36"	Ø 72"	Ø 74⅜"	233⅝"
Ø 96"	48"	Ø 96"	Ø 98⅜"	309 1⁄16"
Ø 120"	60"	Ø 120"	Ø 122⅜"	384 7⁄16"
Ø 240"	120"	Ø 240"	Ø 242⅜"	761 7⁄16"

SURFACE



PENDANT




FOR FIXTURES THAT ARE NOT FULL CIRCLE

L total = L channel + ⅛" in total for two endcaps

FOR FIXTURES THAT ARE FULL CIRCLE

L total = L channel

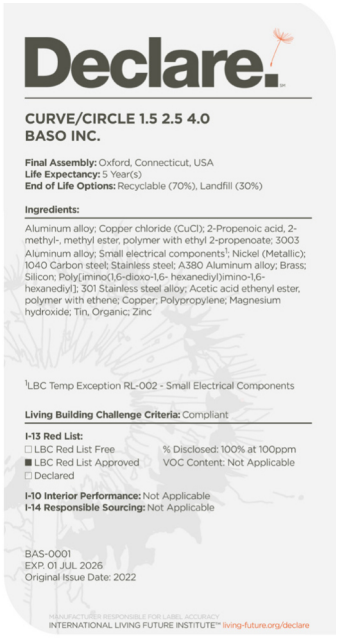
Declare.

CURVE/CIRCLE 1.5 2.5 4.0
BASO INC.

Final Assembly: Oxford, Connecticut, USA
Life Expectancy: 5 Year(s)
End of Life Options: Recyclable (70%), Landfill (30%)

Ingredients:

Aluminum alloy; Copper chloride (CuCl); 2-Propenoic acid, 2-methyl-, methyl ester, polymer with ethyl 2-propenoate; 3003 Aluminum alloy; Small electrical components[1]; Nickel (Metallic); 1040 Carbon steel; Stainless steel; A380 Aluminum alloy; Brass; Silicon; Poly[(imino(1,6-dioxo-1,6- hexanediyl)imino-1,6-hexanediyl]; 301 Stainless steel alloy; Acetic acid ethenyl ester, polymer with ethene; Copper; Polypropylene; Magnesium hydroxide; Tin, Organic; Zinc

[1]LBC Temp Exception RL-002 - Small Electrical Components

Living Building Challenge Criteria: Compliant

I-13 Red List:
☐ LBC Red List Free
■ LBC Red List Approved
☐ Declared

% Disclosed: 100% at 100ppm
VOC Content: Not Applicable

I-10 Interior Performance: Not Applicable
I-14 Responsible Sourcing: Not Applicable

BAS-0001
EXP. 01 JUL 2026
Original Issue Date: 2022

INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare

CURVE mounting instructions

Get access to the CURVE circle mounting instructions faster by scanning the QR code.

https://www.basolighting.com/resources/mounting-instructions/curve