


CURVE 4.0

DIRECT



CERTIFICATIONS & COMPLIANCE

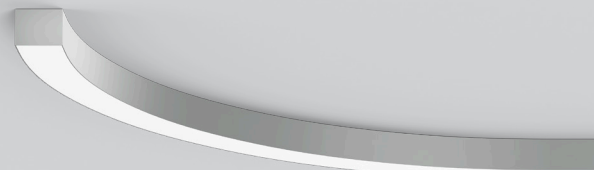


FEATURES




PERFORMANCE

- Up to 106lm/W efficiency
- Max lumen output of 1000lm/ft
- CRI > 80 & CRI > 90
- Damp rated




MOUNTING

Ceiling




Pendant



WHAT SHAPES YOU?

Combines with the BASO 4.0 system components

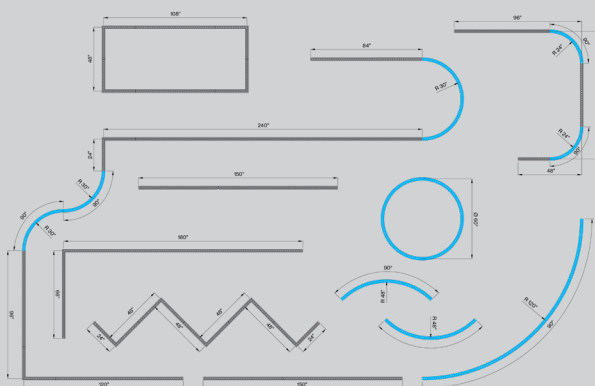

Catalog Number Example

CURVE 4.0-SUR-WH-OP-30K-C80-UNV-010V-0500LF-SC-RA-18IN-A90



A RANGE

CURVE 4.0 CURVE 4 . 0

B MOUNTING

Surface SUR

Pendant PDT

pendant suspension set includes cable suspension and one white power feeder with a white junction box cover

for black power feeds or junction box covers, please contact customer service

C COLOR

White WH

Black BL

Gray GR

Custom color RAL XX

recessed version available in white only

D LENS

HP opal cover OP

E CCT

3000K 3 0 K

3500K 3 5 K

4000K 4 0 K

Custom CCT XX K

F CRI

CRI > 80 C 8 0

CRI > 90 C 9 0

Electrical attributes

G VOLTAGE

120V / 277V UNV

H DIMMING

0-10V 1% 0 1 0 V

Power over ethernet POEC

consult customer service for compatibility

I OUTPUT LM/FT

500lm/ft 100% 0 5 0 0 L F

750lm/ft 100% 0 7 5 0 L F

Custom lm/ft XXXX L F

J CIRCUIT / EM

Single circuit SC

EMC or EMP not available

K RADIUS IN INCH

18" RA - 1 8 I N

24" RA - 2 4 I N

30" RA - 3 0 I N

36" RA - 3 6 I N

48" RA - 4 8 I N

60" RA - 6 0 I N

120" RA - 1 2 0 I N

Custom radii RA - XXX I N

for custom radii, please contact customer service

L ANGLE

22.5° * A 2 2


45° ≥ R36" only A 4 5

90° A 9 0

180° A 1 8 0

Custom angle A X X X

* ≥ R120" only; for custom angles, please contact customer service



BASO
basolighting.com

CS-V01 07/2025

Technical data

DIRECT

90° 	RADIUS SIZE	ANGLE	ARC LEN MECH	LEDs	ARC LEN EL	LUMEN OUTPUT (LM/FT)	POWER INPUT (W)	EFFICACY (LM/W)	LUMEN OUTPUT (LM/FT)	POWER INPUT (W)	EFFICACY (LM/W)	LUMEN OUTPUT (LM/FT)	POWER INPUT (W)	EFFICACY (LM/W)
	R 24"	90	3.1	192	3	500	12.0	125	750	18.3		1000	24.9	120
	R 30"	90	3.9	256	4	500	16.0		750	24.4		1000	33.2	
	R 36"	90	4.7	320	5	500	20.0		750	30.5		1000	41.5	
	R 48"	90	6.3	384	6	500	24.0		750	36.6		1000	49.8	
	R 60"	90	7.9	512	8	500	32.0		750	48.8		1000	66.4	

for 30 K or 35 K multiply lm value by 0.96

45°	RADIUS SIZE	ANGLE	ARC LEN MECH	LEDs	ARC LEN EL	LUMEN OUTPUT (LM/FT)	POWER INPUT (W)	EFFICACY (LM/W)	LUMEN OUTPUT (LM/FT)	POWER INPUT (W)	EFFICACY (LM/W)	LUMEN OUTPUT (LM/FT)	POWER INPUT (W)	EFFICACY (LM/W)
	R 30"	45	2.0	128	2	500	8.0	125	750	12.2	123	1000	16.6	120
	R 36"	45	2.4	160	2.5	500	10.0		750	15.3		1000	20.8	
	R 48"	45	3.1	192	3	500	12.0		750	18.3		1000	24.9	
	R 60"	45	3.9	256	4	500	16.0		750	24.4		1000	33.2	
	R 120"	45	7.9	512	8	500	32.0		750	48.8		1000	66.4	

for 30 K or 35 K multiply lm value by 0.96

22.5°	RADIUS SIZE	ANGLE	ARC LEN MECH	LEDs	ARC LEN EL	LUMEN OUTPUT (LM/FT)	POWER INPUT (W)	EFFICACY (LM/W)	LUMEN OUTPUT (LM/FT)	POWER INPUT (W)	EFFICACY (LM/W)	LUMEN OUTPUT (LM/FT)	POWER INPUT (W)	EFFICACY (LM/W)
	R 60"	22.5	2.0	128	2	500	8.0	125	750	12.2	123	1000	16.6	120
	R 120"	22.5	3.9	256	4	500	16.0		750	24.4		1000	33.2	

for 30 K or 35 K multiply lm value by 0.96

Patterns with BASO 2.5 top view


LINEAR

A	FIXTURES	CODE
48"	1 × 4' linear	ST - 4 8 I N
96"	1 × 8' linear	ST - 9 6 I N
144"	3 × 4' linear	ST - 1 4 4 I N




L-SHAPE / J-SHAPE

A / B	FIXTURES	CODE
48" / 48"	2 × 24" linear + 1 × 24" × 24" corner or R 24" 90° curve	# S - 4 8 X 4 8 I N
48" / 96"	1 × 24" linear + 1 × 72" linear + 1 × 24" × 24" corner or R 24" 90° curve	# S - 4 8 X 9 6 I N
96" / 96"	2 × 72" linear + 1 × 24" × 24" corner or R 24" 90° curve	# S - 9 6 X 9 6 I N




□-SHAPE / O-SHAPE

A / B	FIXTURES	CODE
48" / 48"	4 × 24" × 24" corner or R 24" 90° curve	# S - 4 8 X 4 8 I N
48" / 96"	2 × 48" linear + 4 × 24" × 24" corner or R 24" 90° curve	# S - 4 8 X 9 6 I N
96" / 96"	4 × 48" linear + 4 × 24" × 24" corner or R 24" 90° curve	# S - 9 6 X 9 6 I N





U-SHAPE / C-SHAPE

A / B / C	FIXTURES	CODE
48" / 48" / 48"	2 × 24" linear + 2 × 24" × 24" corner or R 24" 90° curve	# S - 4 8 X 4 8 X 4 8 I N
48" / 96" / 48"	1 × 48" linear + 2 × 24" linear + 2 × 24" × 24" corner or R 24" 90° curve	# S - 4 8 X 9 6 X 4 8 I N
48" / 144" / 48"	1 × 96" linear + 2 × 24" linear + 2 × 24" × 24" corner or R 24" 90° curve	# S - 4 8 X 1 4 4 X 4 8 I N



FULL CIRCLE DIMENSIONS

NOMINAL	ON-CENTER RADIUS	ON-CENTER DIAMETER	OUTSIDE DIAMETER	OUTSIDE CIRCUMFER.
Ø 36"	18"	Ø 36"	Ø 38 ³ / ₈ "	120 ⁹ / ₁₆ "
Ø 48"	24"	Ø 48"	Ø 50 ³ / ₈ "	158 ¹ / ₄ "
Ø 60"	30"	Ø 60"	Ø 62 ³ / ₈ "	196"
Ø 72"	36"	Ø 72"	Ø 74 ³ / ₈ "	233 ⁵ / ₈ "
Ø 96"	48"	Ø 96"	Ø 92 ³ / ₈ "	306"
Ø 120"	60"	Ø 120"	Ø 122 ³ / ₈ "	384 ⁷ / ₁₆ "
Ø 240"	120"	Ø 240"	Ø 242 ³ / ₈ "	761 ⁷ / ₁₆ "




FOR FIXTURES THAT ARE NOT FULL CIRCLE

L total = L channel + ¹/₈" in total for two endcaps

FOR FIXTURES THAT ARE FULL CIRCLE

L total = L channel

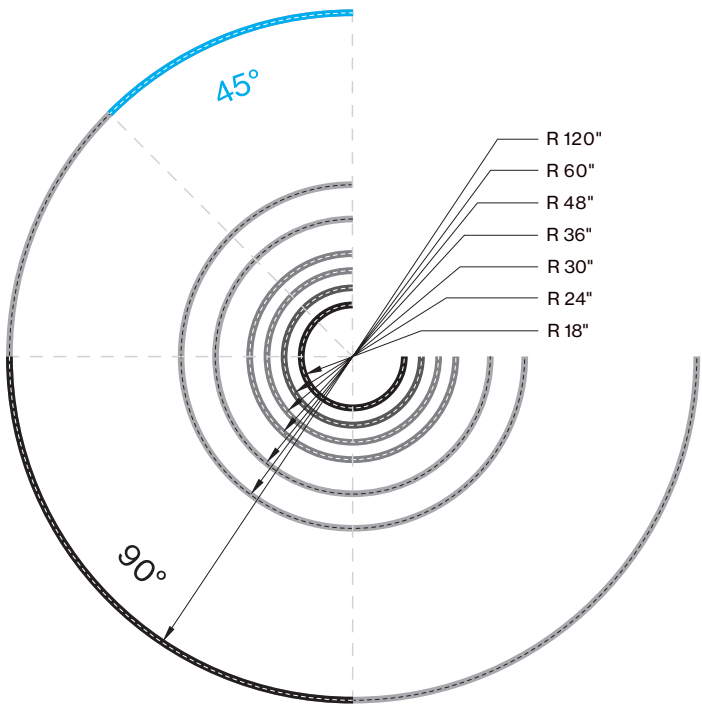

Declare.

CURVE/CIRCLE 1.5 2.5 4.0
BASO Inc.

Final Assembly: Oxford, Connecticut, USA
Life Expectancy: 5 Year(s)
End of Life Options: Recyclable (70%), Landfill (30%)

Ingredients:
Aluminum; Copper chloride (CuCl₂); 2-Propenoic acid, 2-methyl-, methyl ester, polymer with ethyl 2-propenoate; Steel manufacture; chemicals: Unnamed Substance¹; Nickel (Metallic); **Brass**; Silicon; Poly(trimino)(1,6-dioxo-1,6-hexanedyl)imino-1,6-hexanedyl); Acetic acid ethenyl ester, polymer with ethene; Copper; Polypropylene; Magnesium hydroxide; Tin; Organic; Zinc

¹LBC Temp Exception RL-002 - Small Electrical Components

Living Building Challenge Criteria: Compliant

I-13 Red List:
☐ LBC Red List Free % Disclosed: 100% at 100ppm
☒ LBC Red List Approved VOC Content: Not Applicable
☐ Declared

I-10 Interior Performance: Not Applicable
I-14 Responsible Sourcing: Not Applicable

BAS-0001
EXP: 01 MAY 2025
Original Issue Date: 2022

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare

CURVE mounting instructions

Get access to the CURVE circle mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/curve>

