


DOT-R 1.5 ADJUSTABLE

5 YEAR
limited
led warranty



PERFORMANCE

- CRI > 90
- Spotlight 360° rotatable & 25° tiltable



OPTICS

DOT-R 1.5



COMPATIBLE CONTROLS

ATHENA
WIRELESS NODE by
LUTRON




B consult
factory

CERTIFICATIONS & COMPLIANCE




DIMENSIONS

TRIM

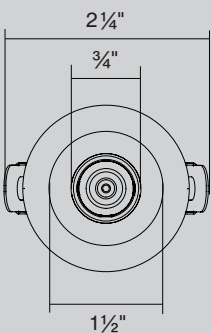

TRIMLESS

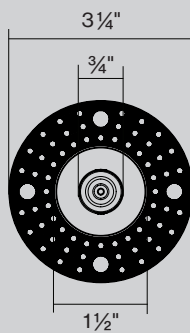

Catalog Number Example

DOT-R1.5-RTR-WHWH-30K-C90-FL-L35D-NOACC-UNV-010V-500LM-7.5W-FBI

A B C D E F G H I J K

A RANGE

DOT-R 1.5 DOT - R 1 . 5

B MOUNTING

Recessed with trim R T R
Recessed trimless R T L

C HOUSING COLOR

White W H _ _
Black B L _ _
Custom RAL X X _ _
custom RAL, please contact BASO

BEZEL COLOR

White _ _ W H
Black _ _ B L
Custom RAL _ _ X X
custom RAL, please contact BASO

D CCT

2700 K 2 7 K
3000 K 3 0 K
3500 K 3 5 K
4000 K 4 0 K
Tunable White (TW) T W

E CRI

CRI > 90 C 9 0

F OPTICS

Spot 15° S P - L 1 5 D
Medium 25° M D - L 2 5 D
Flood 35° F L - L 3 5 D
Wide Flood 45° W D - L 4 5 D

G ACCESSORY

No Accessory N O A C C
Honeycomb Louver H C O M B
Concentric Louver C O N C

H VOLTAGE

120V / 277V U N V

I DIMMING

0-10V 1% dimming 0 1 0 V
DALI D A L I
Lutron L U T
Lutron Athena L U T A
Phase (120V only) P H
Custom dimming consult factory

J OUTPUT


400lm 6W 4 0 0 L M - 6 W
500lm 7.5W 5 0 0 L M - 7 . 5 W
600lm 9W 6 0 0 L M - 9 W

K HOUSING TYPE


From Below Install F B I
T-Rod/non IC-rated T R - N I C
T-Rod / IC-rated T R - I C R
Chicago Plenum T R - C C E A
(CCEA) R E M
Remote Housing

BASO
basolighting.com


Dimensions

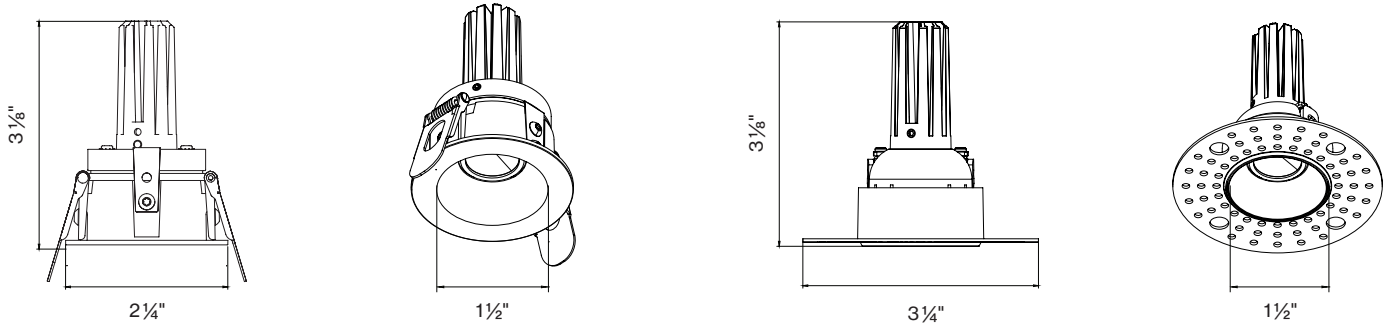

non-IC rated

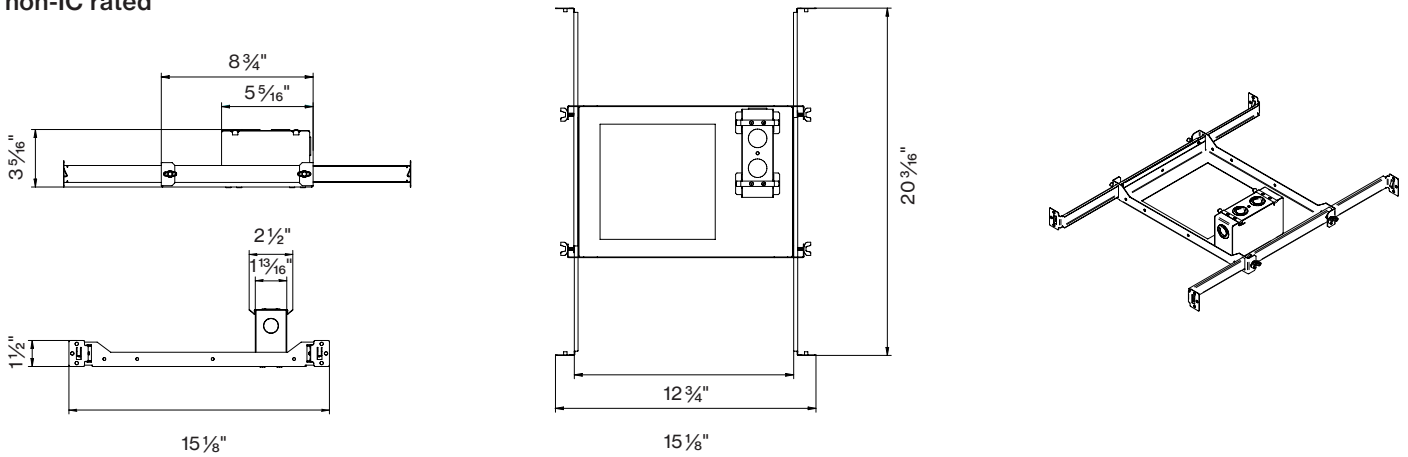

IC rated

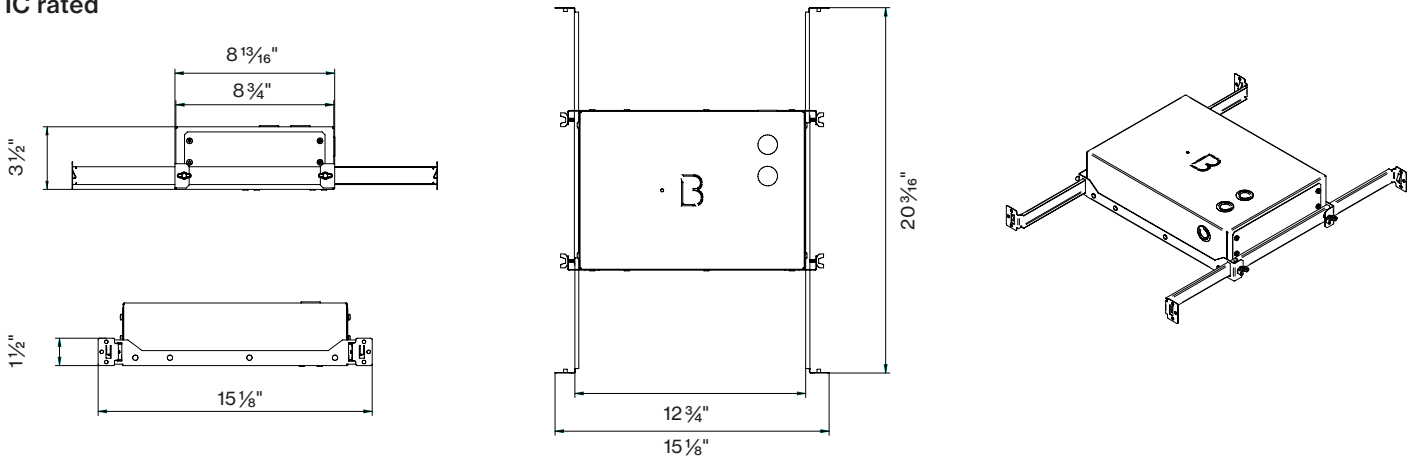

Remote Housing

