


# DOT-R 4.0 FIXED

**5** YEAR  
limited  
led warranty



## PERFORMANCE

• CRI > 90



## OPTICS

DOT-R 4.0



18°



25°



35°



60°

## COMPATIBLE CONTROLS

ATHENA  
WIRELESS NODE by  
**LUTRON**




**B** consult  
factory

## CERTIFICATIONS & COMPLIANCE




## DIMENSIONS

### TRIM

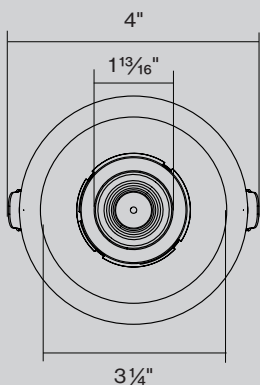

### TRIMLESS

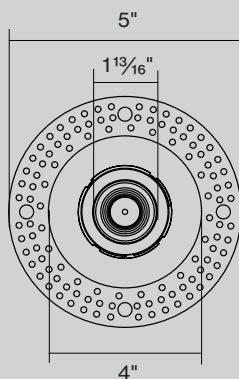

## Catalog Number Example

DOT-SQ4.0-RTR-WHWH-30K-C90-FL-L35D-NOACC-UNV-010V-1000LM-10.5W-FBI

A B C D E F G H I J K

### A RANGE

DOT-R 4.0 DOT - R 4 . 0

### B MOUNTING

Recessed with trim R T R  
Recessed trimless R T L

### C HOUSING COLOR

White WH \_ \_  
Black BL \_ \_  
Custom RAL XX \_ \_  
*custom RAL, please contact BASO*

### BEZEL COLOR

White \_ \_ WH  
Black \_ \_ BL  
Custom RAL \_ \_ XX  
*custom RAL, please contact BASO*

### D CCT

2700 K 2 7 K  
3000 K 3 0 K  
3500 K 3 5 K  
4000 K 4 0 K  
Tunable White (TW) TW

### E CRI

CRI > 90 C 9 0

### F OPTICS

Spot 18° SP - L 1 8 D  
Medium 25° MD - L 2 5 D  
Flood 35° FL - L 3 5 D  
Wide Flood 60° WD - L 6 0 D

### G ACCESSORY

No Accessory NO ACC  
Honeycomb Louver H COMB  
Concentric Louver CON C

### H VOLTAGE

120V / 277V UN V

### I DIMMING

0-10V 1% dimming 0 1 0 V  
DALI D A L I  
Lutron L U T  
Lutron Athena L U T A  
Phase (120V only) P H  
Custom dimming *consult factory*

### J OUTPUT


1000lm 10.5W 1 0 0 0 - 10.5 W  
1500lm 16W 1 5 0 0 - 16 W  
2000lm 21.5W 2 0 0 0 - 21.5 W

### K HOUSING TYPE




From Below Install F B I  
T-Rod/non IC-rated TR - N I C  
T-Rod / IC-rated TR - I C R  
Chicago Plenum (CCEA) T R - C C E A  
Remote Housing R E M

**BASO**  
basolighting.com




**Dimensions**

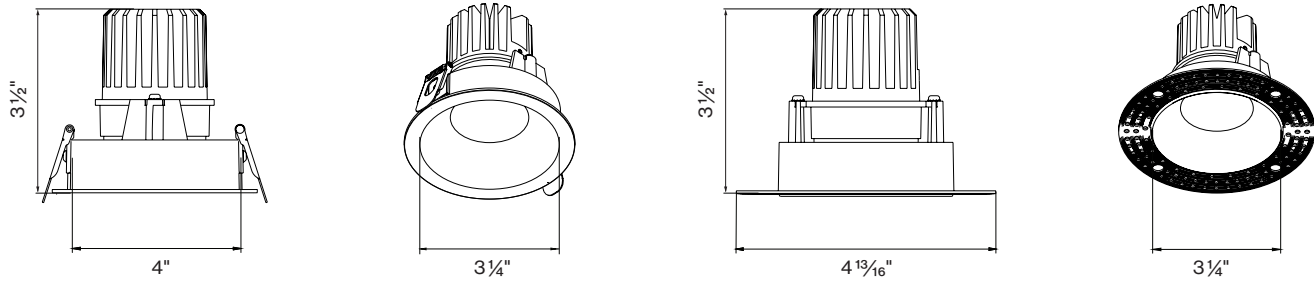

**non-IC rated**

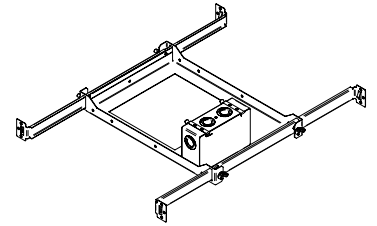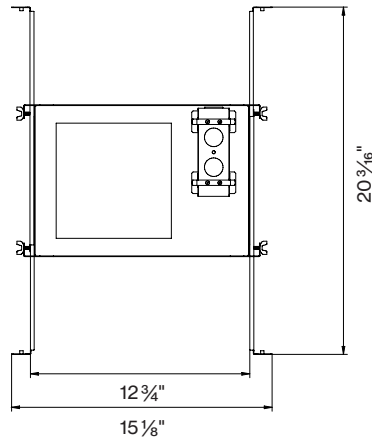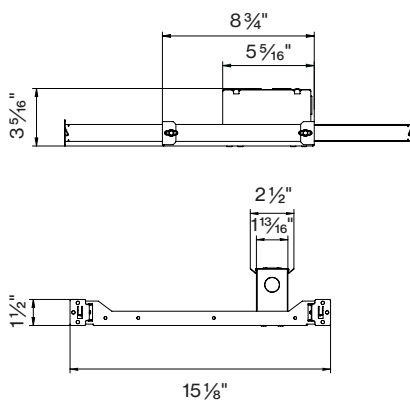

**IC rated**

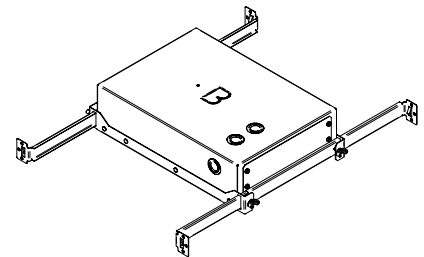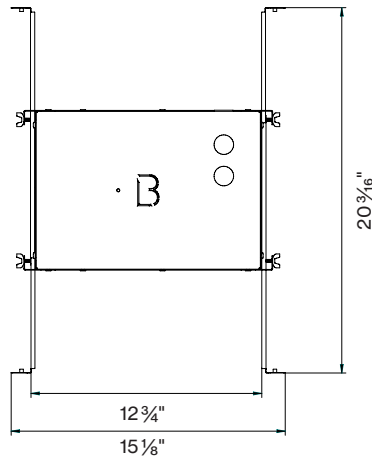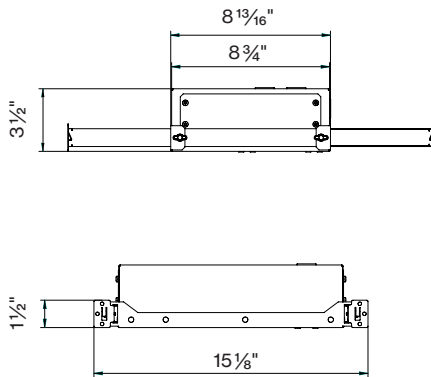

**Remote Housing**

