




DOT-R 2.5 WALL WASHER

5 YEAR
limited
led warranty



PERFORMANCE

• CRI > 90



COMPATIBLE CONTROLS

ATHENA
WIRELESS NODE by
LUTRON




B consult
factory

CERTIFICATIONS & COMPLIANCE



DIMENSIONS TRIM

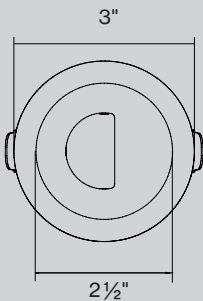

Catalog Number Example

DOT-R2.5-RTR-WHWH-WW-30K-C90-UNV-010V-1300LM-14W-FBI

A B C D E F G H I J

A RANGE

DOT-R 2.5 DOT - R 2 . 5

B MOUNTING

Recessed with trim R T R

C HOUSING COLOR

White WH _ _

Black BL _ _

Custom RAL X X _ _

custom RAL, please contact BASO

BEZEL COLOR

White _ _ WH

Black _ _ BL

Custom RAL _ _ X X

custom RAL, please contact BASO

D LENS

Asymmetric wall washer WW

E CCT

2700 K 2 7 K

3000 K 3 0 K

3500 K 3 5 K

4000 K 4 0 K

Tunable White (TW) TW

F CRI

CRI > 90 C 9 0

G VOLTAGE

120V / 277V UNV

H DIMMING

0-10V 1% dimming 0 1 0 V

DALI D A L I

Lutron Digital Dim L T D

Phase (120V only) P H

Custom dimming *consult factory*

I CONTROLS

Lutron Athena L U T A

nLight N L T

Custom Controls *consult factory*

J OUTPUT

700lm 7.5W 7 0 0 L M - 7 . 5 W

1000lm 10.5W 1 0 0 0 L M - 1 0 . 5 W

1300lm 14.0W 1 3 0 0 L M - 1 4 W

K HOUSING TYPE

From Below Install F B I

T-Rod/non IC-rated T R - N I C



T-Rod / IC-rated T R - I C R

Chicago Plenum
(CCEA) T R - C C E A


Remote Housing R E M

BASO
basolighting.com



DOT-R 2.5 Wall Washer

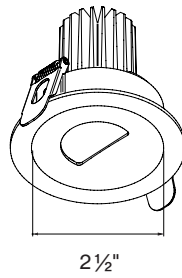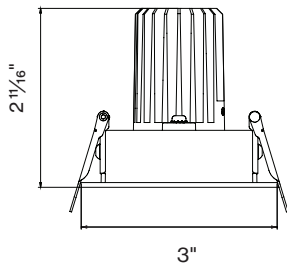




From Below Install (FBI)

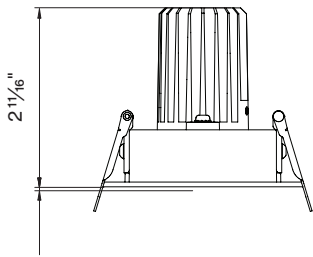

Compatible Ceiling Thickness
1/4", 3/8", 1/2", 5/8"

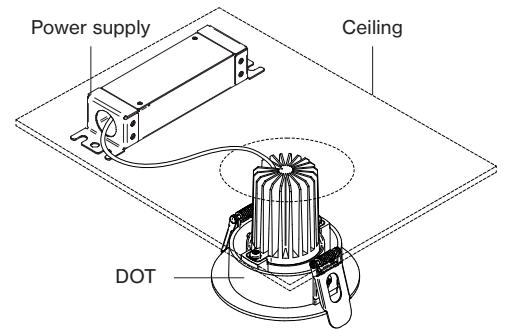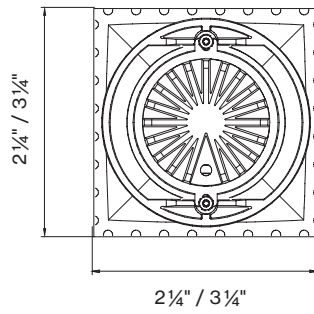

non-IC rated Housing

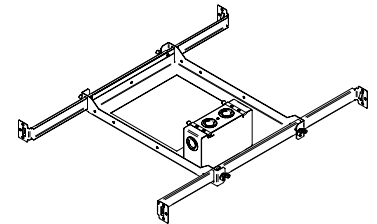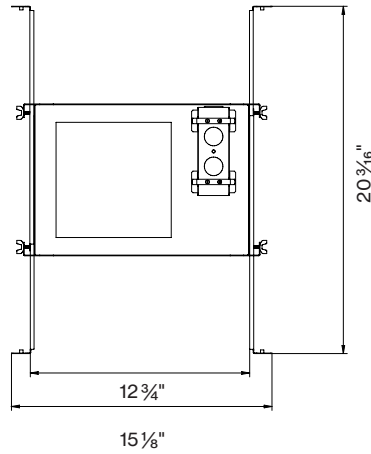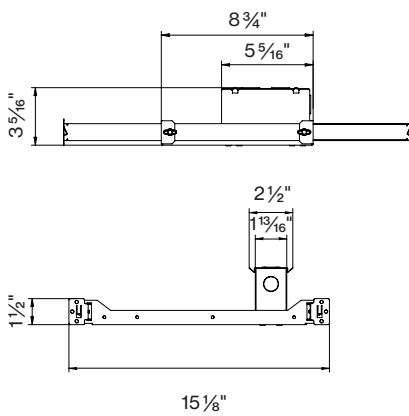


DOT-R mounting instructions

Get access to the DOT-R mounting instructions faster by scanning the QR code.


<https://www.basolighting.com/resources/mounting-instructions/dot-r>



IC rated Housing

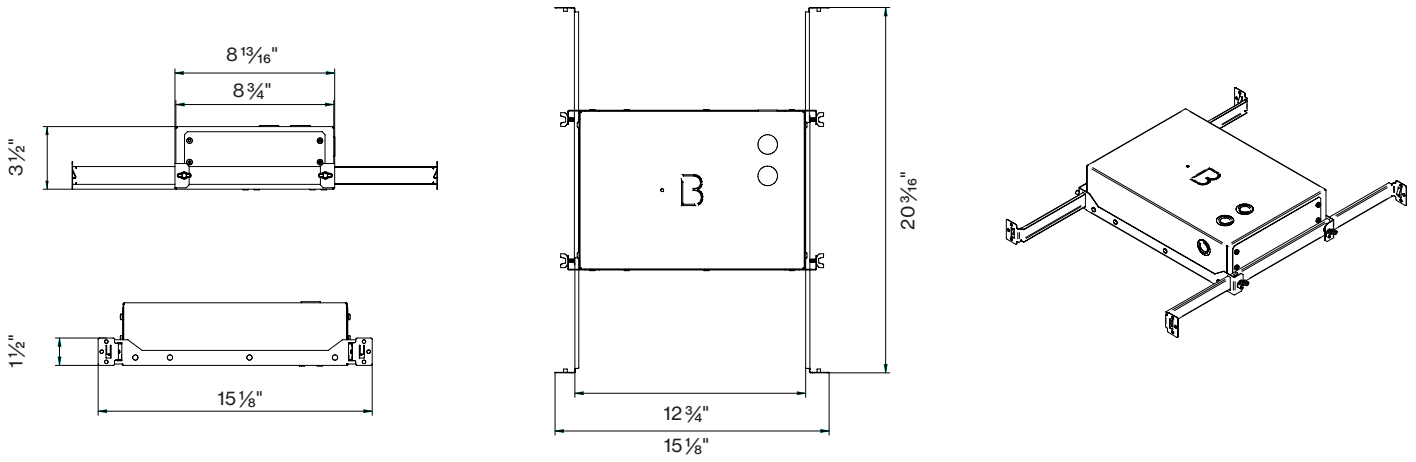

Remote Housing

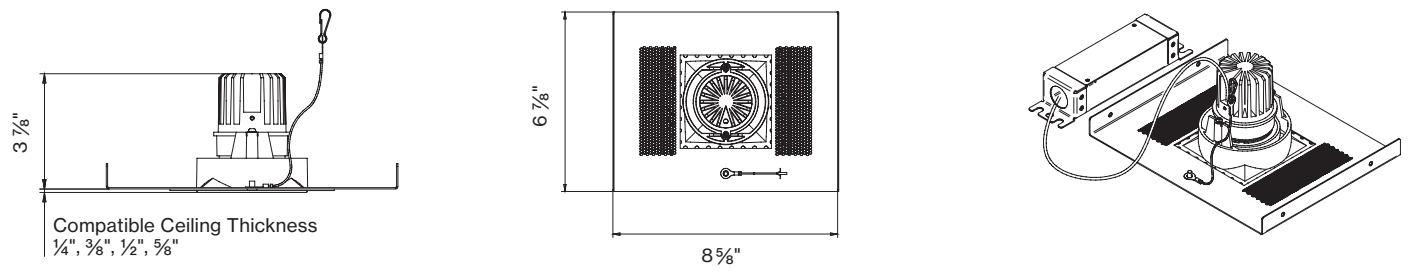

DOT-R mounting instructions

Get access to the DOT-R mounting instructions faster by scanning the QR code.
<https://www.basolighting.com/resources/mounting-instructions/dot-r>

