DOT-SQ 4.0
ADJUSTABLE

5 YEAR limited led warranty

PERFORMANCE



- Up to 100lm/W
- 1000 - 2000 delivered lumens
- CRI > 90
- Spotlight 360° rotatable & 30° tiltable
- Customizable
- Accessories and lenses field changeable
- Serviceable in the field

OPTICS

DOT-SQ 4.0

15° 25° 35° 60°

COMPATIBLE CONTROLS & FEATURES

ATHENA WIRELESS NODE by LUTRON · nLIGHT · consult factory · QS QUICK SHIP

CERTIFICATIONS & COMPLIANCE

BAA BABA · cULus · RoHS compliant · TITLE 24 JA8

DIMENSIONS

TRIM



TRIMLESS







Catalog Number Example

DOT-SQ4.0A-RTR-WHWH-30K-C90-FL-L35D-UNV-010V-NLT-1000LM-HCOMB-FBI-BAA

A B C D E F G H I J K L M

Ⓐ RANGE

DOT-SQ 4.0	DOT - SQ4.0A

Ⓑ MOUNTING

QS Recessed trim	RTR
QS Recessed trimless (mud-in)	MUD
Millwork	MLW

Ⓒ HOUSING COLOR

QS White	WH _ _
QS Black	BL _ _
Custom RAL	XX _ _

custom RAL, please contact BASO

BEZEL COLOR

QS White	_ _ WH
QS Black	_ _ BL
Custom RAL	_ _ XX

custom RAL, please contact BASO

Ⓓ CCT

QS 2700 K	27K
QS 3000 K	30K
QS 3500 K	35K
QS 4000 K	40K
1840-4000K Tunable White	T1840 - C90
2700-6500K Tunable White	T2765 - C90
Dim-to-warm 1800-3000K	DW

Ⓔ CRI

QS CRI > 90	C90

Ⓕ OPTICS

QS Spot 15°	SP - L15D
QS Medium 25°	MD - L25D
QS Flood 35°	FL - L35D
QS Wide Flood 60°	WD - L60D

Ⓖ VOLTAGE

QS 120V / 277V	UNV

Ⓗ DIMMING

QS 0-10V 1% dimming	010V
DALI *	DALI
Lutron Digital Dim	LTD
Phase (120V only)	PH
Custom dimming consult factory	XXXX

* Not available with FBI housing

Ⓘ CONTROLS

QS No Controls	*
Lutron Athena compatible	LUTA
nLight compatible	NLT
Custom Controls consult factory	XXXX

* leave blank

Ⓙ OUTPUT

QS 1000lm 10W	1000LM
QS 1500lm 15W	1500LM
QS 2000lm 20W	2000LM
Custom lm*	XXXLM

*custom lumen from 1000 up to 2000 lm

Ⓚ ACCESSORY

QS No Accesory	*
Honeycomb Louver	HCOMB
Concentric Louver	CONC
Solite Filter	SF

* leave blank

Ⓛ HOUSING

QS From Below Install *	FBI
QS T-Rod/non IC-rated	TR - NIC
T-Rod / IC-rated	TR - ICR
Chicago Plenum (CCEA)	TR - CCEA
QS Remote Housing	REM

* Requires 6" minimum plenum

Ⓜ CERTIFICATION

No Certification	*
BAA Compliant	BAA
BABA Compliant	BABA

* leave blank

BASO
basolighting.com

Technical data

DOT-SQ 4.0 ADJUSTABLE

Delivered Lumens	CCT	CRI	Input Watts	Luminaire Efficacy
1000 lm	4000K	CRI > 90	10 W	100 lm/W
1500 lm	4000K	CRI > 90	15 W	100 lm/W
2000 lm	4000K	CRI > 90	20 W	100 lm/W

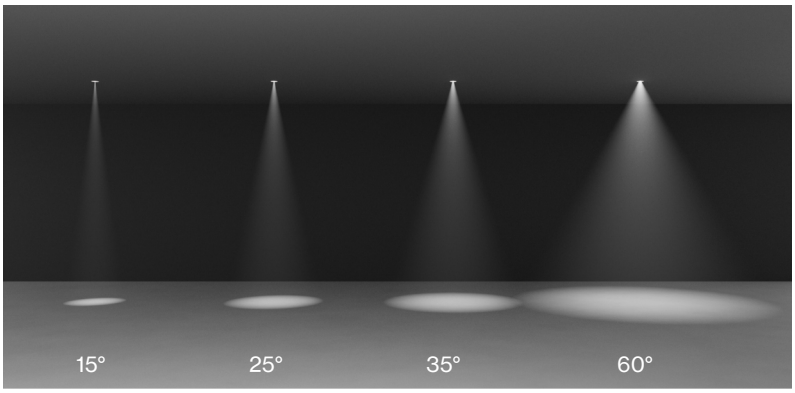

Beam angles

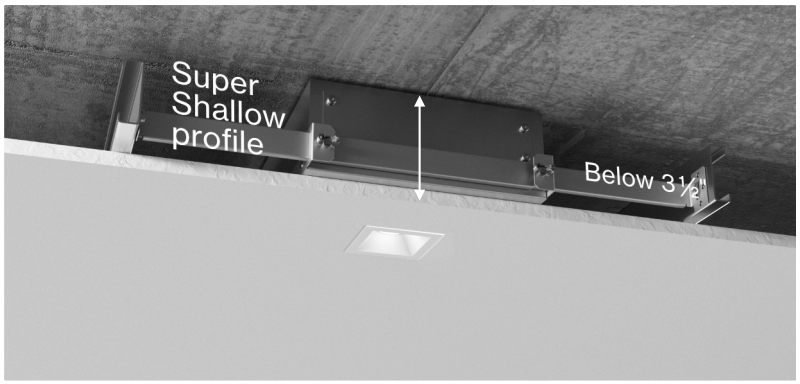

Low Ceiling Profile

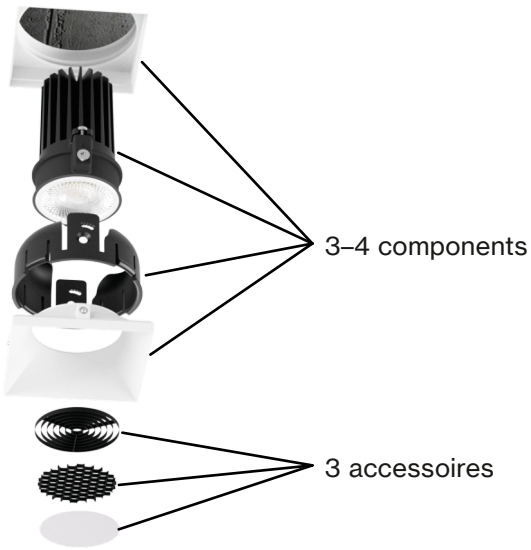

Easy Assembly

MOUNTING

From Below Install (FBI)



Compatible Ceiling Thickness
¼", ⅜", ½", ⅝"

Cutout dimension



3½"

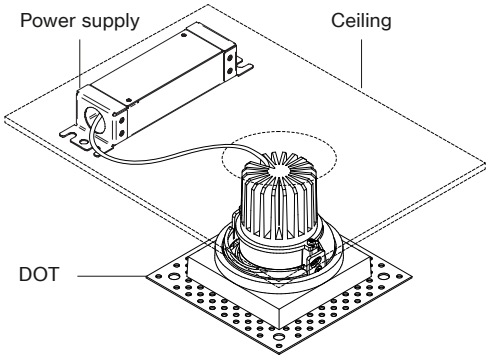

non-IC rated Housing

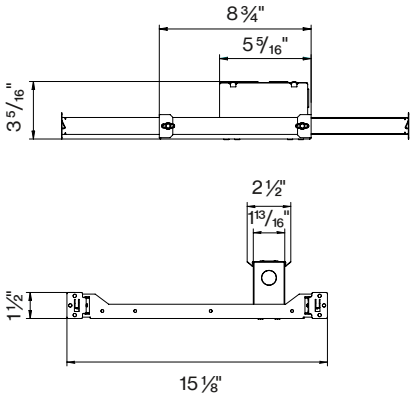

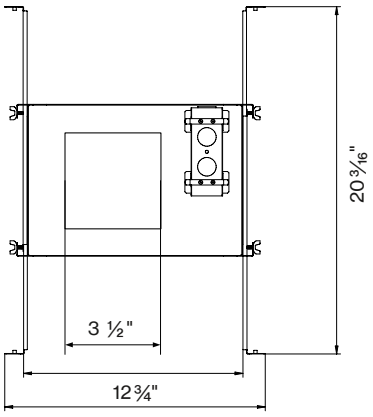

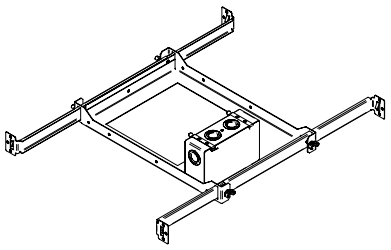

IC rated Housing

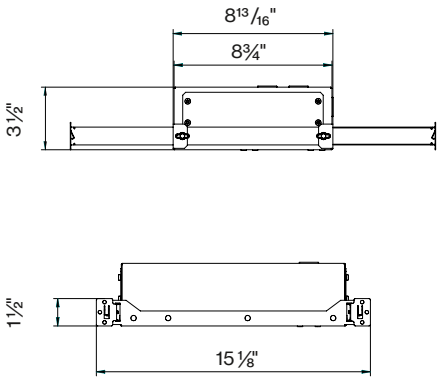

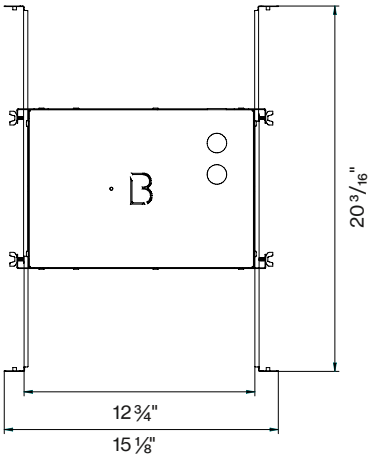

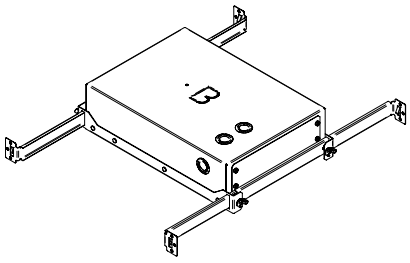

Remote Housing

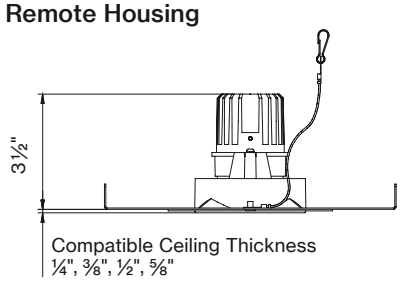

Compatible Ceiling Thickness
¼", ⅜", ½", ⅝"



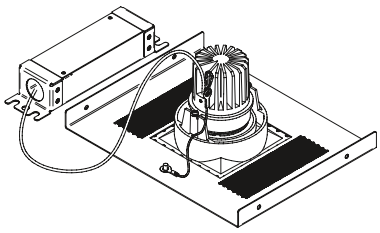

DOT-SQ mounting instructions

Get access to the DOT-SQ
mounting instructions faster by scanning the QR code.

https://www.basolighting.com/resources/
mounting-instructions/dot-sq