

DOT-SQ 4.0


ADJUSTABLE

5 YEAR
limited
led warranty



PERFORMANCE

- CRI > 90
- Spotlight 360° rotatable & 30° tiltable



OPTICS

DOT-SQ 4.0



COMPATIBLE CONTROLS

ATHENA
WIRELESS NODE by
LUTRON




B consult
factory

CERTIFICATIONS & COMPLIANCE




DIMENSIONS

TRIM

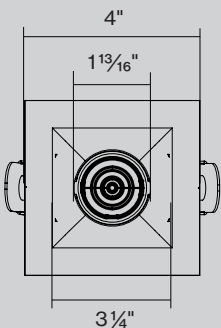

TRIMLESS

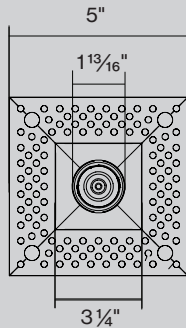

Catalog Number Example

DOT-SQ4.0-RTR-WHWH-30K-C90-FL-L35D-NOACC-UNV-010V-1000LM-10.5W-FBI

A B C D E F G H I J K

A RANGE

DOT-R 4.0 DOT - R 4 . 0

B MOUNTING

Recessed with trim R T R
Recessed trimless R T L

C HOUSING COLOR

White W H
Black B L
Custom RAL X X
custom RAL, please contact BASO

BEZEL COLOR

White W H
Black B L
Custom RAL X X
custom RAL, please contact BASO

D CCT

2700 K 2 7 K
3000 K 3 0 K
3500 K 3 5 K
4000 K 4 0 K
Tunable White (TW) T W

E CRI

CRI > 90 C 9 0

F OPTICS

Spot 18° S P - L 1 8 D
Medium 25° M D - L 2 5 D
Flood 30° F L - L 3 5 D
Wide Flood 60° W D - L 6 0 D

G ACCESSORY

No Accessory N O A C C
Honeycomb Louver H C O M B
Concentric Louver C O N C

H VOLTAGE

120V / 277V U N V

I DIMMING

0-10V 1% dimming O 1 0 V
DALI D A L I
Lutron L U T
Lutron Athena L U T A
Phase (120V only) P H
Custom dimming consult factory

J OUTPUT


1000lm 10.5W 1 0 0 0 - 1 0 . 5 W
1500lm 16W 1 5 0 0 - 1 6 W
2000lm 21.5W 2 0 0 0 - 2 1 . 5 W

K HOUSING TYPE


From Below Install F B I
T-Rod/non IC-rated T R - N I C
T-Rod / IC-rated T R - I C R
Chicago Plenum T R - C C E A
(CCEA)
Remote Housing

BASO
basolighting.com


Dimensions

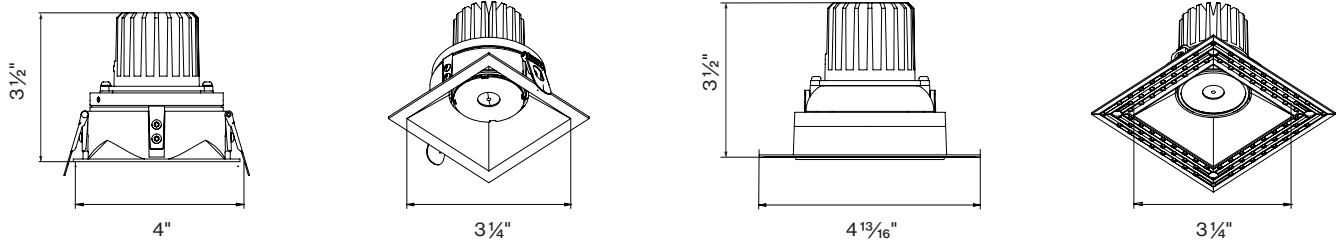


non-IC rated

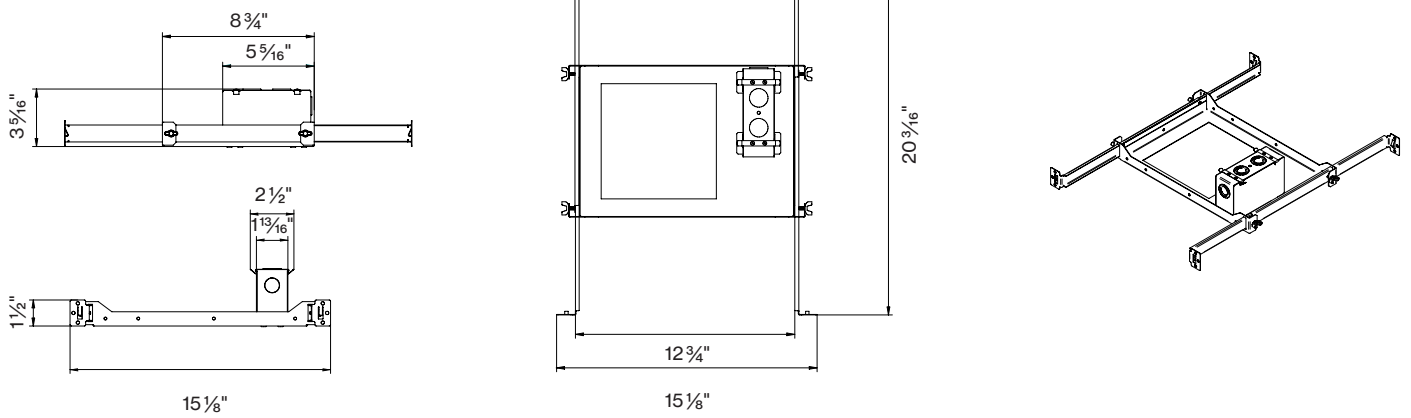

IC rated

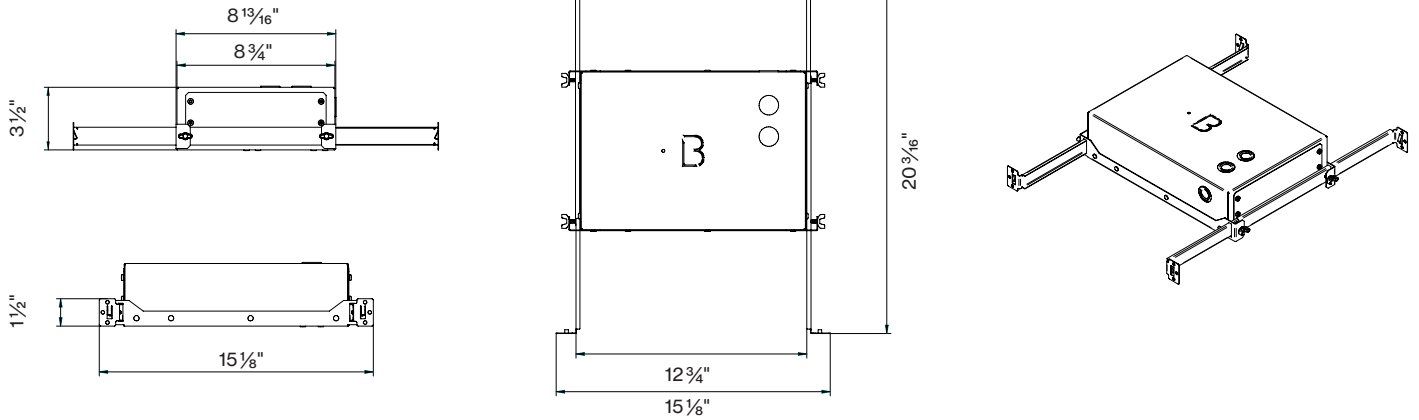

Remote Housing

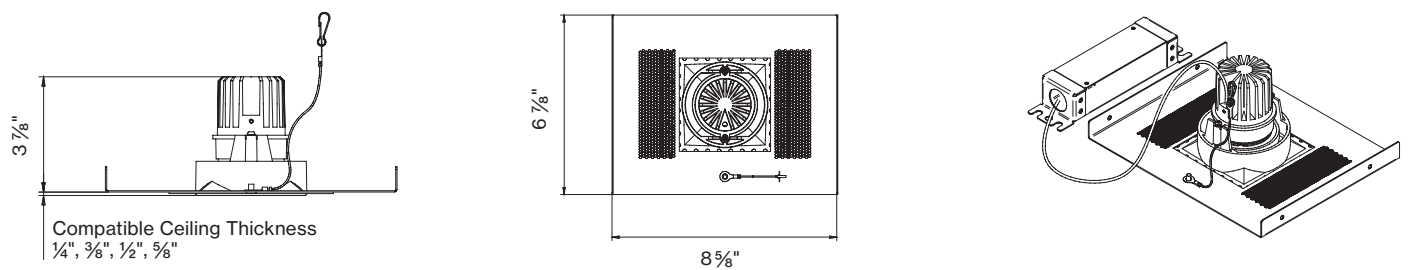

Compatible Ceiling Thickness
1/4", 3/8", 1/2", 5/8"