



# DOT-SQ 1.5 FIXED

**5** YEAR  
limited  
led warranty

## Catalog Number Example


DOT-SQ1.5-RTR-WHWH-30K-C90-FL-L35D-NOACC-UNV-010V-500LM-7.5W-FBI

A B C D E F G H I J K



## PERFORMANCE

• CRI > 90



## OPTICS

DOT-SQ 1.5



15°



25°



35°



45°

## COMPATIBLE CONTROLS

ATHENA  
WIRELESS NODE by  
**LUTRON**




**B** consult  
factory

## CERTIFICATIONS & COMPLIANCE




## DIMENSIONS

### TRIM

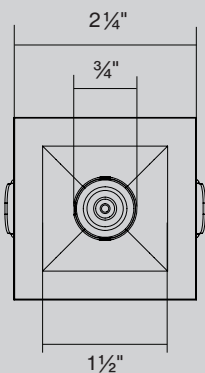

### TRIMLESS

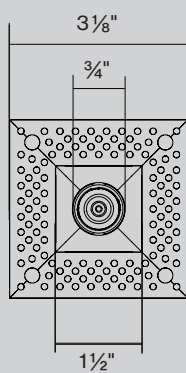

## A RANGE

DOT-SQ 1.5 DOT - SQ 1 . 5

## B MOUNTING

Recessed with trim R T R  
Recessed trimless R T L

## C HOUSING COLOR

White WH  
Black B L  
Custom RAL X X  
*custom RAL, please contact BASO*

## BEZEL COLOR

White WH  
Black B L  
Custom RAL X X  
*custom RAL, please contact BASO*

## D CCT

2700 K 2 7 K  
3000 K 3 0 K  
3500 K 3 5 K  
4000 K 4 0 K  
Tunable White (TW) T W

## E CRI

CRI > 90 C 9 0

## F OPTICS

Spot 15° S P - L 1 5 D  
Medium 25° M D - L 2 5 D  
Flood 30° F L - L 3 5 D  
Wide Flood 45° W D - L 4 5 D

## G ACCESSORY

No Accessory NO ACC  
Honeycomb Louver H COMB  
Concentric Louver CON C

## H VOLTAGE

120V / 277V UN V

## I DIMMING

0-10V 1% dimming 0 1 0 V  
DALI D A L I  
Lutron L U T  
Lutron Athena L U T A  
Phase (120V only) P H  
Custom dimming consult factory

## J OUTPUT


400lm 6W 4 0 0 L M - 6 W  
500lm 7.5W 5 0 0 L M - 7 . 5 W  
600lm 9W 6 0 0 L M - 9 W

## K HOUSING TYPE


From Below Install F B I  
T-Rod/non IC-rated T R - N I C  
T-Rod / IC-rated T R - I C R  
Chicago Plenum T R - C C E A  
(CCEA)  
Remote Housing

**BASO**  
basolighting.com


Dimensions

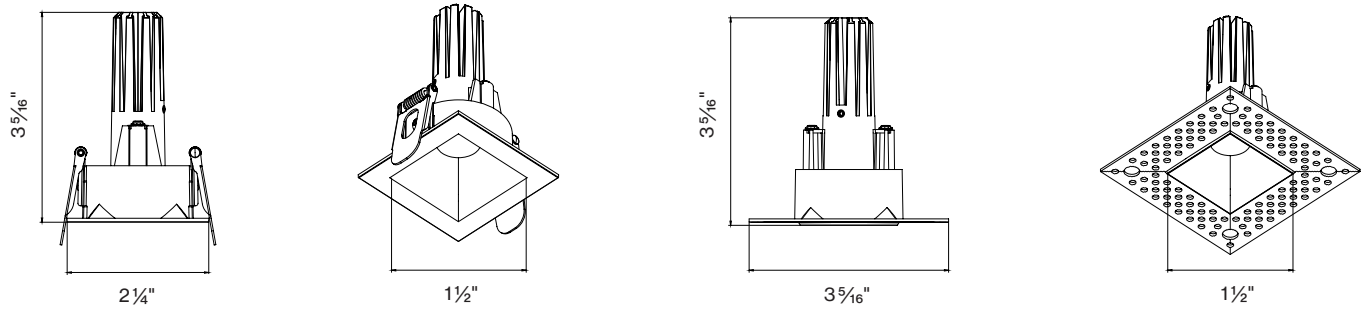

non-IC rated

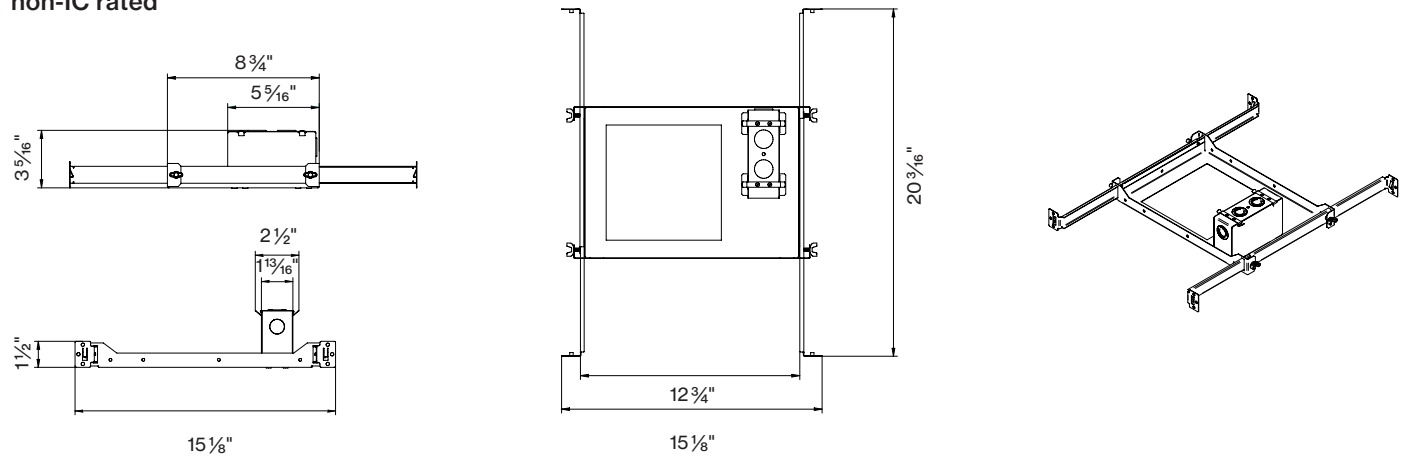

IC rated

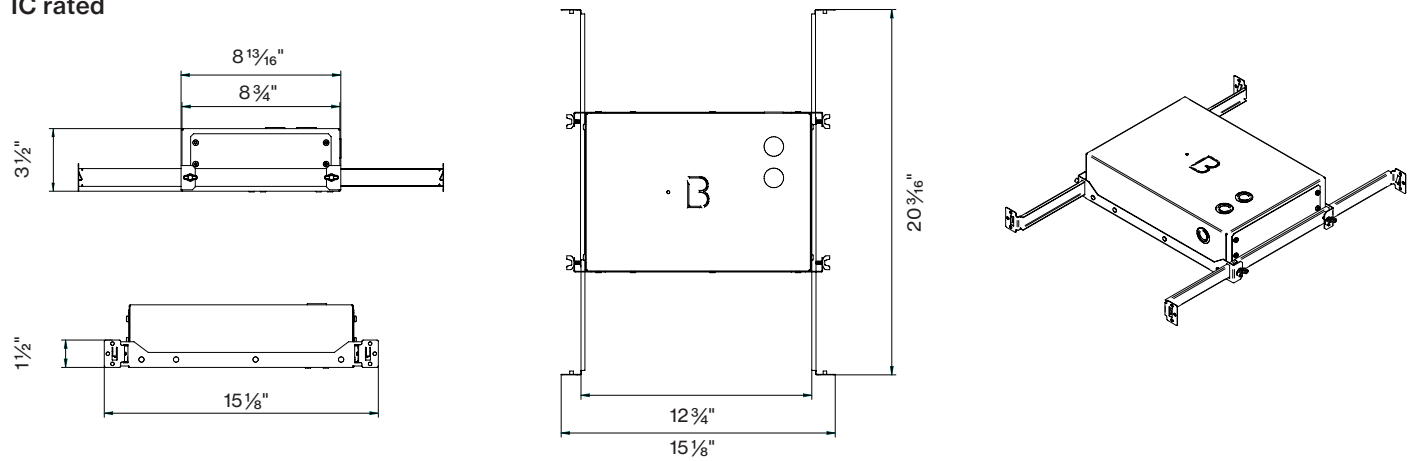

Remote Housing

