HEX
DIRECT

5 YEAR limited led warranty

MOUNTING

Surface

Pendant



PERFORMANCE

- Up to 141 lm/W efficiency
- 1500 – 13000 delivered lumens
- 2700 K, 3000 K, 3500 K, 4000 K
- CRI > 80 & CRI > 90
- Customizable



COMPATIBLE CONTROLS & FEATURES

ATHENA WIRELESS NODE by LUTRON · nLIGHT · SENSOR READY · consult factory

ONE CLICK INSTALLATION

Mounting & electrical connection with one click



CERTIFICATIONS & COMPLIANCE

c UL us · RoHS compliant

DIMENSIONS

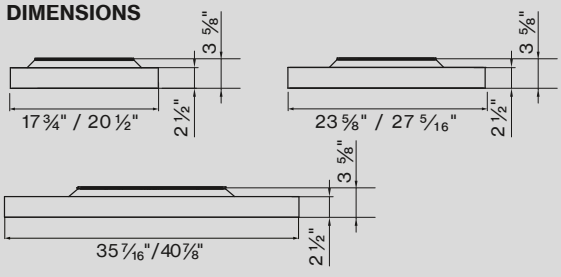

Catalog Number Example

HEX-DIR-SUR-BL-OP-35K-C90-UNV-010V-03000L-DM-2FT

A B C D E F G H I J K

A RANGE

HEX	HEX-DIR

B MOUNTING

Surface	SUR
Pendant	PDT

pendant suspension set includes cable suspension and one white power feeder with a white junction box cover

for black junction box covers, please contact customer service

C COLOR

White	WH
Black	BL
Gray	GR
Custom color RAL	XX

D LENS

Opal cover	OP

E CCT

3000K	30K
3500K	35K
4000K	40K

F CRI

CRI > 80	C80
CRI > 90	C90

G VOLTAGE

120V/277V	UNV
347 V	347

only 0-10 V dim

H DIMMING

0-10V 1% dimming	010V
DALI	DALI
Lutron Digital Dim	LTD
Power over ethernet consult factory	POEC
Custom dimming consult factory	XXXX

I OUTPUT LM

⬡ 1½'	2000lm 17 W	02000L
	3000lm 25.9 W	03000L
⬡ 2'	3000lm 25 W	03000L
	4000lm 33.4 W	04000L
	5000lm 41.1 W	05000L
⬡ 3'	5000lm 40.9 W	05000L
	6000lm 49.2 W	06000L
	8000lm 66.6 W	08000L
	11000lm 93.9 W	11000L

Efficiencies based on CRI90
CRI80 values are up to 15% more efficient

J CIRCUIT / EM

Single circuit *	
* leave blank	
EMP EM battery pack	EMB

Emergency battery pack only for 120 / 277 V option. Hi-lume only available for DM 3'. No Hi-Lume EM available for DM 1' and 2'

K DIAMETER IN FT

⬡ 1½'	DM-1.5FT
⬡ 2'	DM-2FT
⬡ 3'	DM-3FT

BASO
basolighting.com

Technical data

HEX DIRECT

Size	Delivered Lumens	CCT	CRI	Input Watts	Luminaire Efficacy
1′	2000 lm	4000 K	80+ / 90+	14.8 / 17 W	135 / 118 lm/W
1′	3000 lm	4000 K	80+ / 90+	22.5 / 25.9 W	133 / 116 lm/W
2′	3000 lm	4000 K	80+ / 90+	21.7 / 25 W	138 / 120 lm/W
2′	4000 lm	4000 K	80+ / 90+	29 / 33.4 W	138 / 120 lm/W
2′	5000 lm	4000 K	80+ / 90+	35.7 / 41.1 W	140 / 122 lm/W
3′	5000 lm	4000 K	80+ / 90+	35.6 / 40.9 W	141 / 122 lm/W
3′	6000 lm	4000 K	80+ / 90+	42.8 / 49.2 W	140 / 122 lm/W
3′	8000 lm	4000 K	80+ / 90+	57.9 / 66.6 W	138 / 120 lm/W
3′	11000 lm	4000 K	80+ / 90+	81.7 / 93.9 W	135 / 117 lm/W

LUMEN OUTPUT MULTIPLIER

Color Temperature	CRI	
	80+	90+
4000K	1	0.86
3500K	0.96	0.84
3000K	0.95	0.82
2700K	0.91	0.78

Accessory

SUSPENSION SET < 36 INCH

3-piece barrel mount set	698-098-05140

HEX 1'

surface



suspended





HEX 2'

surface



suspended

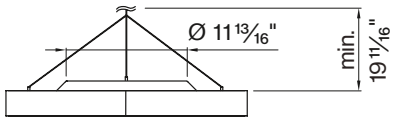

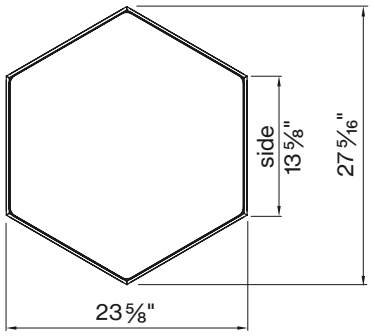

HEX 3'

surface

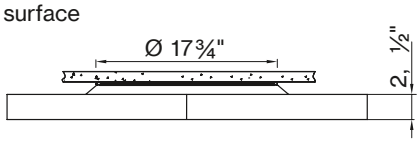

suspended

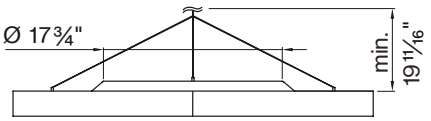

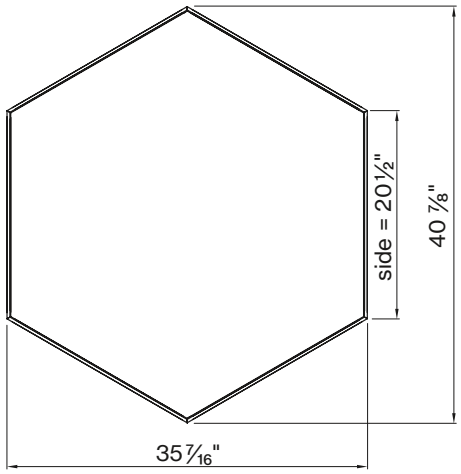

FIXTURE DIMENSIONS

NOMINAL	DIMENSIONS	CODE
⎔ 1½'	⎔ 17 ¾" / h 3 ⅝"	DM - 1 . 5 F T
⎔ 2'	⎔ 23 ⅝" / h 3 ⅝"	DM - 2 F T
⎔ 3'	⎔ 35 7/16" / h 3 ⅝"	DM - 3 F T

HEX mounting instructions

Get access to the HEX mounting instructions faster by scanning the QR code.

https://www.basolighting.com/resources/mounting-instructions/hex