


Technical data

SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
 ○ 1 1/2' gray	30 K, 35 K	20 W	2080 lm	100 % down	2080 lm	85 %	102 lm/W
	40 K		2160 lm		2160 lm		106 lm/W
	30 K, 35 K	34 W	2970 lm		2970 lm		87 lm/W
	40 K		3080 lm		3080 lm		90 lm/W
○ 2' gray	30 K, 35 K	27 W	3030 lm	100 % down	3030 lm	85 %	111 lm/W
	40 K		3160 lm		3150 lm		116 lm/W
	30 K, 35 K	39 W	4060 lm		4060 lm		104 lm/W
	40 K		4220 lm		4220 lm		108 lm/W
	30 K, 35 K	53 W	5080 lm		5070 lm		96 lm/W
	40 K		5280 lm		5270 lm		100 lm/W
○ 3' gray	30 K, 35 K	43 W	5010 lm	100 % down	5010 lm	85 %	116 lm/W
	40 K		5210 lm		5210 lm		121 lm/W
	30 K, 35 K	53 W	5970 lm		5970 lm		113 lm/W
	40 K		6210 lm		6210 lm		118 lm/W
	30 K, 35 K	75 W	7980 lm		7970 lm		107 lm/W
	40 K		8300 lm		8290 lm		111 lm/W
	30 K, 35 K	112 W	10900 lm		10890 lm		98 lm/W
	40 K		11340 lm		11330 lm		102 lm/W

Accessory


SUSPENSION SET < 36 INCH

3-piece barrel mount set 6 9 8 - 0 9 8 - 0 5 1 4 0


FIXTURE DIMENSIONS

NOMINAL	DIMENSIONS	CODE
○ 1 1/2'	○ 17 3/4" / h 2 1/2"	DM - 1 . 5 FT
○ 2'	○ 23 5/8" / h 2 1/2"	DM - 2 FT
○ 3'	○ 35 7/16" / h 2 1/2"	DM - 3 FT


HEX 1'

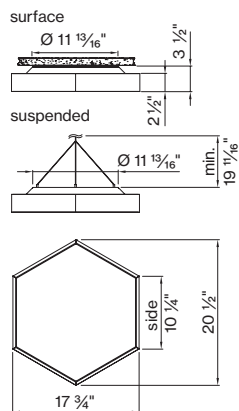

HEX 2'

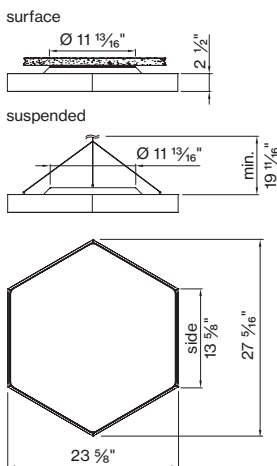

HEX 3'

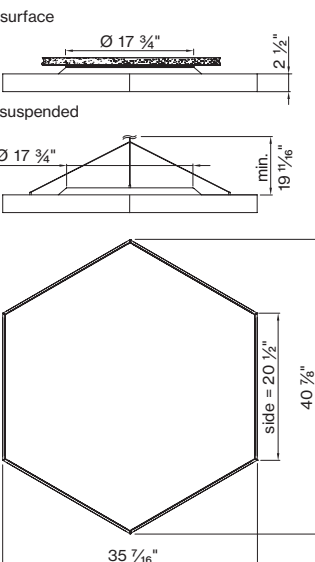

HEX mounting instructions

Get access to HEX mounting instructions faster by scanning the QR code.



<https://www.xalusa.com/resources/mounting-instructions/hex>