HEX
DIRECT/INDIRECT

5 YEAR limited led warranty

MOUNTING

Surface

Pendant



PERFORMANCE

- Up to 143 lm/W efficiency
- 2500 – 15000 delivered lumens
- 2700 K, 3000 K, 3500 K, 4000 K
- CRI > 80 & CRI > 90
- Customizable



COMPATIBLE CONTROLS & FEATURES

ATHENA WIRELESS NODE by LUTRON · nLIGHT · SENSOR READY · consult factory

ONE CLICK INSTALLATION

Mounting & electrical connection with one click



CERTIFICATIONS & COMPLIANCE

c UL us · RoHS compliant

DIMENSIONS

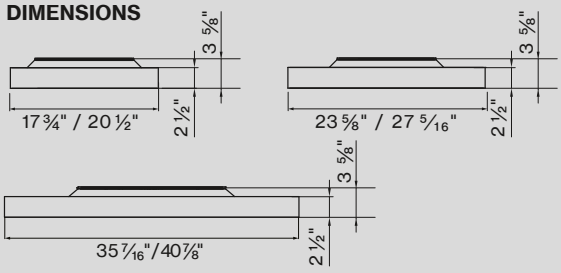

Catalog Number Example

HEX-D/I-SUR-BL-OP-35K-C90-UNV-010V-04000L-DM-2FT

A B C D E F G H I J K

A RANGE

HEX	HEX-D/I

B MOUNTING

Surface	SUR
Pendant	PDT

pendant suspension set includes cable suspension and one white power feeder with a white junction box cover

for black junction box covers, please contact customer service

C COLOR

White	WH
Black	BL
Gray	GR
Custom color RAL	XX

D LENS

Opal cover	OP

E CCT

3000K	30K
3500K	35K
4000K	40K

F CRI

CRI > 80	C80
CRI > 90	C90

G VOLTAGE

120V/277V	UNV
347 V	347

only 0-10 V dim

H DIMMING

0-10V 1% dimming	010V
DALI	DALI
Lutron Digital Dim	LTD
Power over ethernet consult factory	POEC
Custom dimming consult factory	XXXX

I OUTPUT LM

⬡ 1½'	2900lm 25.2 W	02900L
	4100lm 36 W	04100L
⬡ 2'	4000lm 33.4 W	04000L
	5400lm 44.7 W	05400L
	6500lm 54.8 W	06500L
⬡ 3'	6800lm 54.6 W	06800L
	7800lm 63.6 W	07800L
	10100lm 84 W	10100L
	13800lm 117.4 W	13800L

Efficiencies based on CRI90
CRI80 values are up to 15% more efficient

J CIRCUIT / EM

Single circuit *	
* leave blank	
Dual circuit	DC
EMP EM battery pack	EMB

EM battery pack only for 120 / 277 V option. Lutron only available for DM 3' ≤ 10000lm. No Lutron EM available for DM 1' or DM 2'

K DIAMETER IN FT

⬡ 1½'	DM-1.5FT
⬡ 2'	DM-2FT
⬡ 3'	DM-3FT

BASO
basolighting.com

Technical data

HEX DIRECT / INDIRECT

Size	Delivered Lumens	CCT	CRI	Down (lm)	Up (lm)	Input Watts	Luminaire Efficacy
1′	2900 lm	4000 K	80+ / 90+	2117 (73%)	783 (27%)	21.9 / 25.2 W	132 / 115 lm/W
1′	4100 lm	4000 K	80+ / 90+	2993 (73%)	1107 (27%)	31.3 / 36 W	131 / 114 lm/W
2′	4000 lm	4000 K	80+ / 90+	3040 (76%)	960 (24%)	29 / 33.4 W	138 / 120 lm/W
2′	5400 lm	4000 K	80+ / 90+	4104 (76%)	1296 (24%)	38.9 / 44.7 W	139 / 121 lm/W
2′	6500 lm	4000 K	80+ / 90+	5200 (80%)	1300 (20%)	47.7 / 54.8 W	136 / 119 lm/W
3′	6800 lm	4000 K	80+ / 90+	5032 (74%)	1768 (26%)	47.5 / 54.6 W	143 / 125 lm/W
3′	7800 lm	4000 K	80+ / 90+	6240 (80%)	1560 (20%)	55.3 / 63.6 W	141 / 123 lm/W
3′	10100 lm	4000 K	80+ / 90+	8080 (80%)	2020 (20%)	73 / 84 W	138 / 120 lm/W
3′	13800 lm	4000 K	80+ / 90+	11040 (80%)	2760 (20%)	102.1 / 117.4 W	135 / 118 lm/W

LUMEN OUTPUT MULTIPLIER

Color Temperature	CRI	
	80+	90+
4000K	1	0.86
3500K	0.96	0.84
3000K	0.95	0.82
2700K	0.91	0.78

Accessory

SUSPENSION SET < 36 INCH

3-piece barrel mount set	698-098-05140

HEX 1'

surface



suspended





HEX 2'

surface



suspended

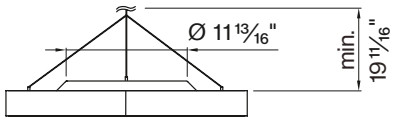

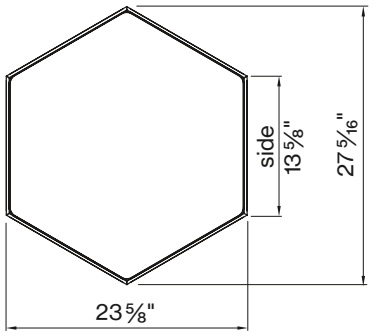

HEX 3'

surface

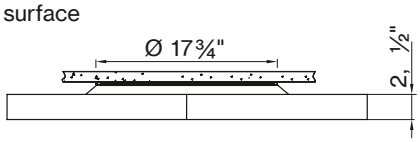

suspended

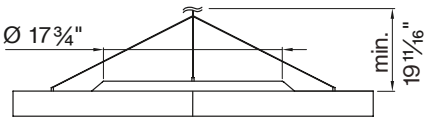

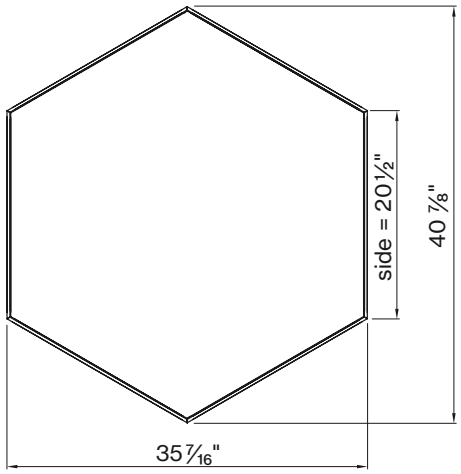

FIXTURE DIMENSIONS

NOMINAL	DIMENSIONS	CODE
⎔ 1½'	⎔ 17 ¾" / h 3 ⅝"	DM - 1 . 5 F T
⎔ 2'	⎔ 23 ⅝" / h 3 ⅝"	DM - 2 F T
⎔ 3'	⎔ 35 7/16" / h 3 ⅝"	DM - 3 F T

HEX mounting instructions

Get access to the HEX mounting instructions faster by scanning the QR code.

https://www.basolighting.com/resources/mounting-instructions/hex