M-LINE
HEX

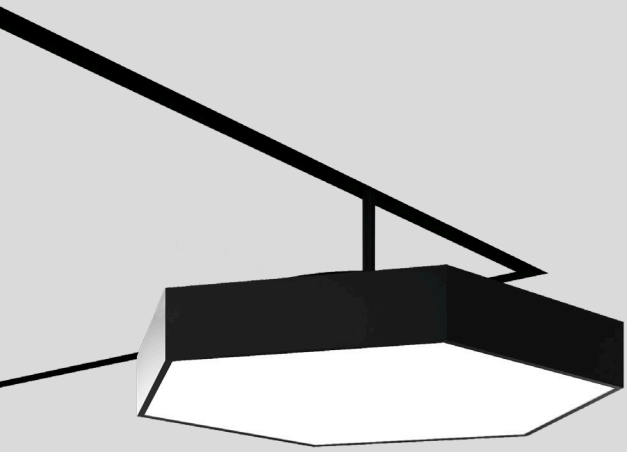

5 YEAR limited led warranty

Catalog Number Example

MLINS-HEX-BL-27K-C90-010V-1000LM-012IN

A B C D E F G H

MOUNTING

Pendant



PERFORMANCE

- Up to 100 lm/W
- 1000 lm
- Decorative pendant shapes
- Magnetic inset attachment
- CRI > 90
- Safety catch locking



COMPATIBLE CONTROLS & FEATURES

ATHENA WIRELESS NODE by LUTRON · nLIGHT · SENSOR READY · consult factory · QUICK SHIP

CERTIFICATIONS & COMPLIANCE

cULus · RoHS compliant · TITLE 24 JA8

DIMENSIONS

HEX



A RANGE

M-LINE inset	M L I N S

B INSET TYPE

HEX	H E X

for specific stem/cable lengths, please contact customer service

C COLOR

Black	B L

D CCT

2700 K	2 7 K
3000 K	3 0 K
3500 K	3 5 K
4000 K	4 0 K

E CRI

CRI > 90	C 9 0

F DIMMING

0-10V 1 % single control	0 1 0 V
0-10V 1 % dual control*	D C 1 0

*two 0-10V dimming outputs

wiring diagram is on power supply page

G OUTPUT LM

1000 lm / 10 W	1 0 0 0 L M

H STEM LENGTH

Not field cuttable

Specify length	# # # I N

BASO
basolighting.com

HEX pendant

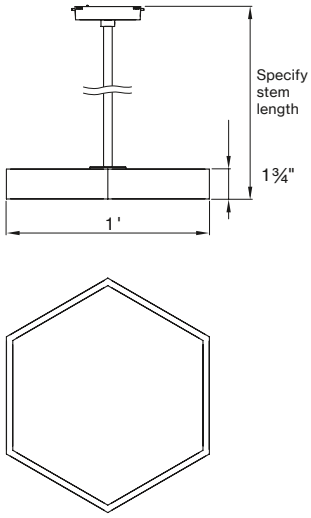

M-LINE
Mounting Instructions

Get access to the M-LINE mounting instructions faster by scanning the QR code.

https://www.basolighting.com/resources/mounting-instructions/m-line