M-LINE
LINEAR

5 YEAR limited led warranty

MOUNTING




PERFORMANCE

- Up to 96 lm/W
- 350–530 lm/ft
- Magnetic inset attachment
- CRI > 90
- End to end capabilities
- 1:3 wall wash ratio



COMPATIBLE CONTROLS & FEATURES

ATHENA WIRELESS NODE by LUTRON · nLIGHT · SENSOR READY · consult factory · QS QUICK SHIP

CERTIFICATIONS & COMPLIANCE

cULus · RoHS compliant · TITLE 24 JA8

DIMENSIONS

Wallwash (1.1)



Grazer (1.1)



Batwing (1.1)



Opal Jut Out (1.1)



Opal (1.2)



Wallwash (1.2)



Catalog Number Example

MLINS-1.1-WALLW-27K-C90-010V-0350LF-2FT

A B C D E F G H

A RANGE

M-LINE inset	M L I N S

B TRACK TYPE

M-LINE 1.1	1 . 1
M-LINE 1.2	1 . 2

C INSET TYPE

Batwing available for 1.1 only	B A T W I
Grazer available for 1.1 only	G R A Z E
QS Opal jut-out available for 1.1 only	O P A L J
Opal flush available for both 1.1 & 1.2	O P A L F
Wallwasher available for both 1.1 & 1.2	W A L L W

D CCT

2700 K	2 7 K
QS 3000 K	3 0 K
QS 3500 K	3 5 K
4000 K	4 0 K

E CRI

CRI > 90	C 9 0

F DIMMING

QS 0-10V 1 % single control	0 1 0 V
0-10V 1 % dual control*	D C 1 0

*two 0-10V dimming outputs

wiring diagram is on power supply page

G OUTPUT LM/FT

350 lm/ft Wallwasher	0 3 5 0 L F
QS 390 lm/ft Opal flush - MLINE 1.1 only	0 3 9 0 L F
450 lm/ft Opal flush - MLINE 1.2 only	0 4 5 0 L F
500 lm/ft Batwing	0 5 0 0 L F
510 lm/ft Grazer	0 5 1 0 L F
530 lm/ft Opal jut-out - MLINE 1.1 only	0 5 3 0 L F

H DIMENSIONS IN FEET

1 foot	6 W	1 F T
QS 2 feet	11 W	2 F T
QS 4 feet	22 W	4 F T
8 feet	44 W	8 F T

opal flush only

BASO
basolighting.com

Linear lenses

opal

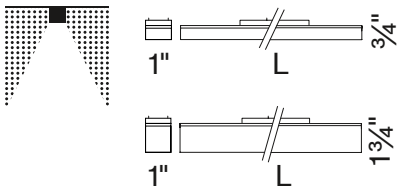

opal jut-out



wallwasher

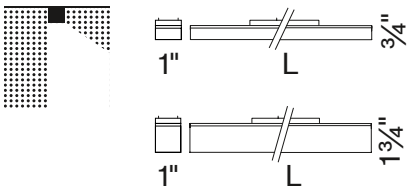

batwing



grazer regressed



M-LINE
Mounting Instructions

Get access to the M-LINE mounting instructions faster by scanning the QR code.

https://www.basolighting.com/resources/mounting-instructions/m-line