M-LINE
TUBE

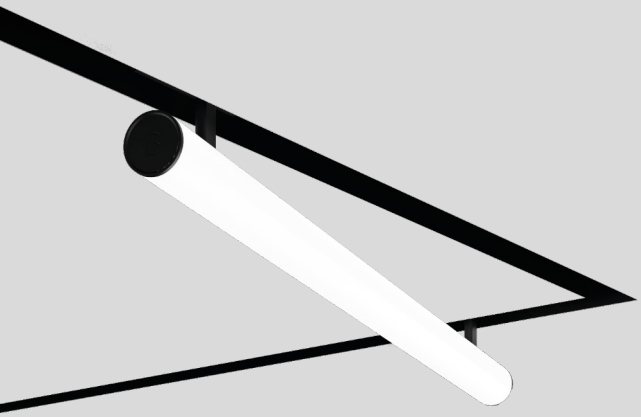

5 YEAR limited led warranty

MOUNTING
Magnetic inset attachment



PERFORMANCE
- Up to 118 lm/W
- 590 lm/ft
- Magnetic inset attachment
- CRI > 90
- Safety catch locking



COMPATIBLE CONTROLS & FEATURES
ATHENA WIRELESS NODE by LUTRON · hLight · SENSOR READY · consult factory · QUICK SHIP

ADDITIONAL FEATURES

attaches to M-LINE track via magnets



freely movable

CERTIFICATIONS & COMPLIANCE
cULus · RoHS compliant · TITLE 24 JA8

DIMENSIONS
TUBE



Catalog Number Example
MLINS-1.1TUBE-BL-35K-C90-010V-0590LF-3FT

A B C D E F G H

A RANGE

M-LINE inset	M L I N S

B INSET TYPE

TUBE 1.1	1 . 1 T U B E
TUBE 1.2	1 . 2 T U B E

C COLOR

Black	B L

fine texture powder coated

D CCT

2700 K	2 7 K
3000 K	3 0 K
3500 K	3 5 K
4000 K	4 0 K

E CRI

CRI > 90	C 9 0

F DIMMING

0-10V 1 % single control	0 1 0 V
0-10V 1 % dual control*	D C 1 0

*two 0-10V dimming outputs

wiring diagram is on power supply page

G OUTPUT LM/FT

590 lm/ft 100%	0 5 9 0 L F

H DIMENSIONS IN FT

Linear 2'	1 0 W	2 F T
Linear 3'	1 5 W	3 F T
Linear 4'	20 W	4 F T

BASO
basolighting.com

TUBE inset

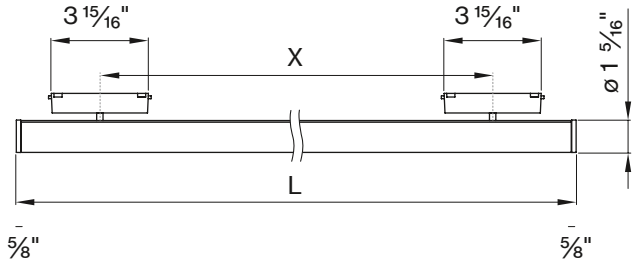

CHANNEL SPACING

L	X
2'	18¾"
3'	30½"
4'	42¼"

X = maximum on center channel spacing

M-LINE
Mounting Instructions

Get access to the M-LINE mounting instructions faster by scanning the QR code.

https://www.basolighting.com/resources/mounting-instructions/m-line