


PANO 5.25"

WOODWORKS® GRILLE FORTÉ



CERTIFICATIONS & COMPLIANCE

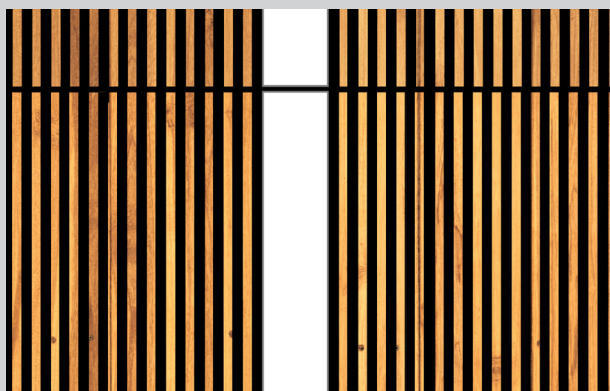


FEATURES




PERFORMANCE

- Coordinates with Woodworks® Grille Forté ceiling panel
- Up to 122lm/W
- High performance opal cover
- Remote mountable LED driver
- Damp rated



WoodWorks® Grille Forté Ceiling Integration

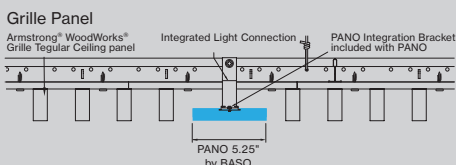

BASO's Integrated Connection Clip is required for installation, see page 2 for more details

INTEGRATED DRIVER / REMOTE MOUNTING

Quick and easy electrical connection

REMOTE MOUNTING



Catalog Number Example

PANO5-WGF-BL-PM-OP-27K-C80-UNV-DALI-0550LF-ST-04FT



A RANGE

PANO 5.25" P A N O 5

B CEILING TYPE

WoodWorks® Grille Forté W G F

C COLOR

White W H
Black B L

D POWER FEED LENGTH

4' standard integrated P S
10' medium remote option P M
30' long remote option P L

power feed distance denotes secondary wiring from detachable driver box to fixture; driver box comes with a 6 ft conduit for primary wiring

E LENS

HP opal cover O P

F CCT

2700K 2 7 K
3000K 3 0 K
3500K 3 5 K
4000K 4 0 K
Custom CCT X X K

G CRI

CRI > 80 C 8 0
CRI > 90 C 9 0

H VOLTAGE

120V / 277V U N V

I DIMMING

0-10V 1% 0 1 0 V
Lutron EcoSystem L E S 1
Quantum, Vive, GRAFIK Eye, HomeWorks
Power over ethernet P O E C
consult customer service for compatibility
Custom dimming X X X X
consult customer service for compatibility

J OUTPUT LM/FT

550lm/ft 100% ‡ 0 5 5 0 L F
775lm/ft 100% ‡ 0 7 7 5 L F
1000lm/ft 100% ‡ 1 0 0 0 L F

K CIRCUIT / EM

Single circuit *
* leave blank
EMB EM battery pack E M B
emergency battery pack only for 120/ 277V option (90 minute emergency operation)

L SHAPE / PATTERN

Linear / straight S T

M DIMENSIONS IN FT

4' fixture 0 4 F T
6' fixture 0 6 F T
8' fixture 0 8 F T

fixture replaces full length of ceiling panel; please see table on next page and fixture length dimensions


Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LUMEN DIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
PANO 5.25"								
e LED	8' opal	40 K	35.4 W	4400lm	100 % down	4400lm	81%	110lm/W
e ² LED	8' opal	40 K	50.5 W	6200lm	100 % down	6200lm	81%	106lm/W
e ²⁺ LED	8' opal	40 K	67.3 W	8000lm	100 % down	8000lm	81%	98lm/W

for 27 K, 30 K or 35 K multiply lm value by 0.96

WoodWorks® Grille Tegular Ceiling Integration

(for more ceiling options, please see CEILING OPTIONS pages)

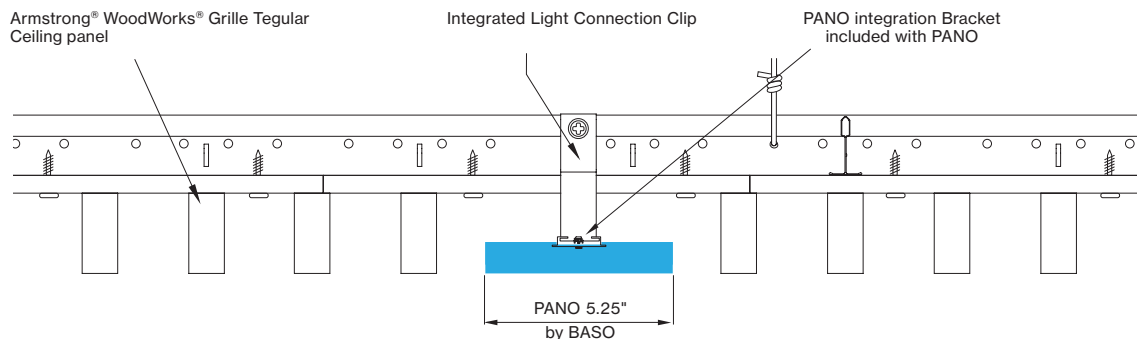

Available lengths for ceiling types

CEILING TYPE	2 FT	4 FT	6 FT	8 FT
WoodWorks® Grille Tegular $\frac{9}{16}$	23.375"	47.375"	n/a	n/a
WoodWorks® Grille Tegular $\frac{15}{16}$	23"	47"	n/a	n/a
WoodWorks® Grille Classic	23"	47"	71"	95"
WoodWorks® Grille Forte	*23"	47"	71"	95"
WoodWorks® Linear Solid Wood panels	*23"	*47"	*71"	95"
WoodWorks® Linear Veneered panels	*23"	*47"	*71"	95.25"

*Woodworks ceilings are not available in this length. Wood panels need to be cut in the field to fit this length.

WGF view from below



INTEGRATED LIGHT CONNECTION CLIP

Integrated Light Connection Clip ACC-PANO-FC-2

Required to be ordered with the fixture

Quantity needed per fixture

Length	Qty
8FT	4
6FT	4
4FT	3
2FT	2

PANO mounting instructions

Get access to the PANO mounting instructions faster by scanning the QR code.


<https://www.basolighting.com/resources/mounting-instructions/pano>






DIMENSIONS

WWG - ARMSTRONG® WOODWORKS® GRILLE PANELS

WWG view from below

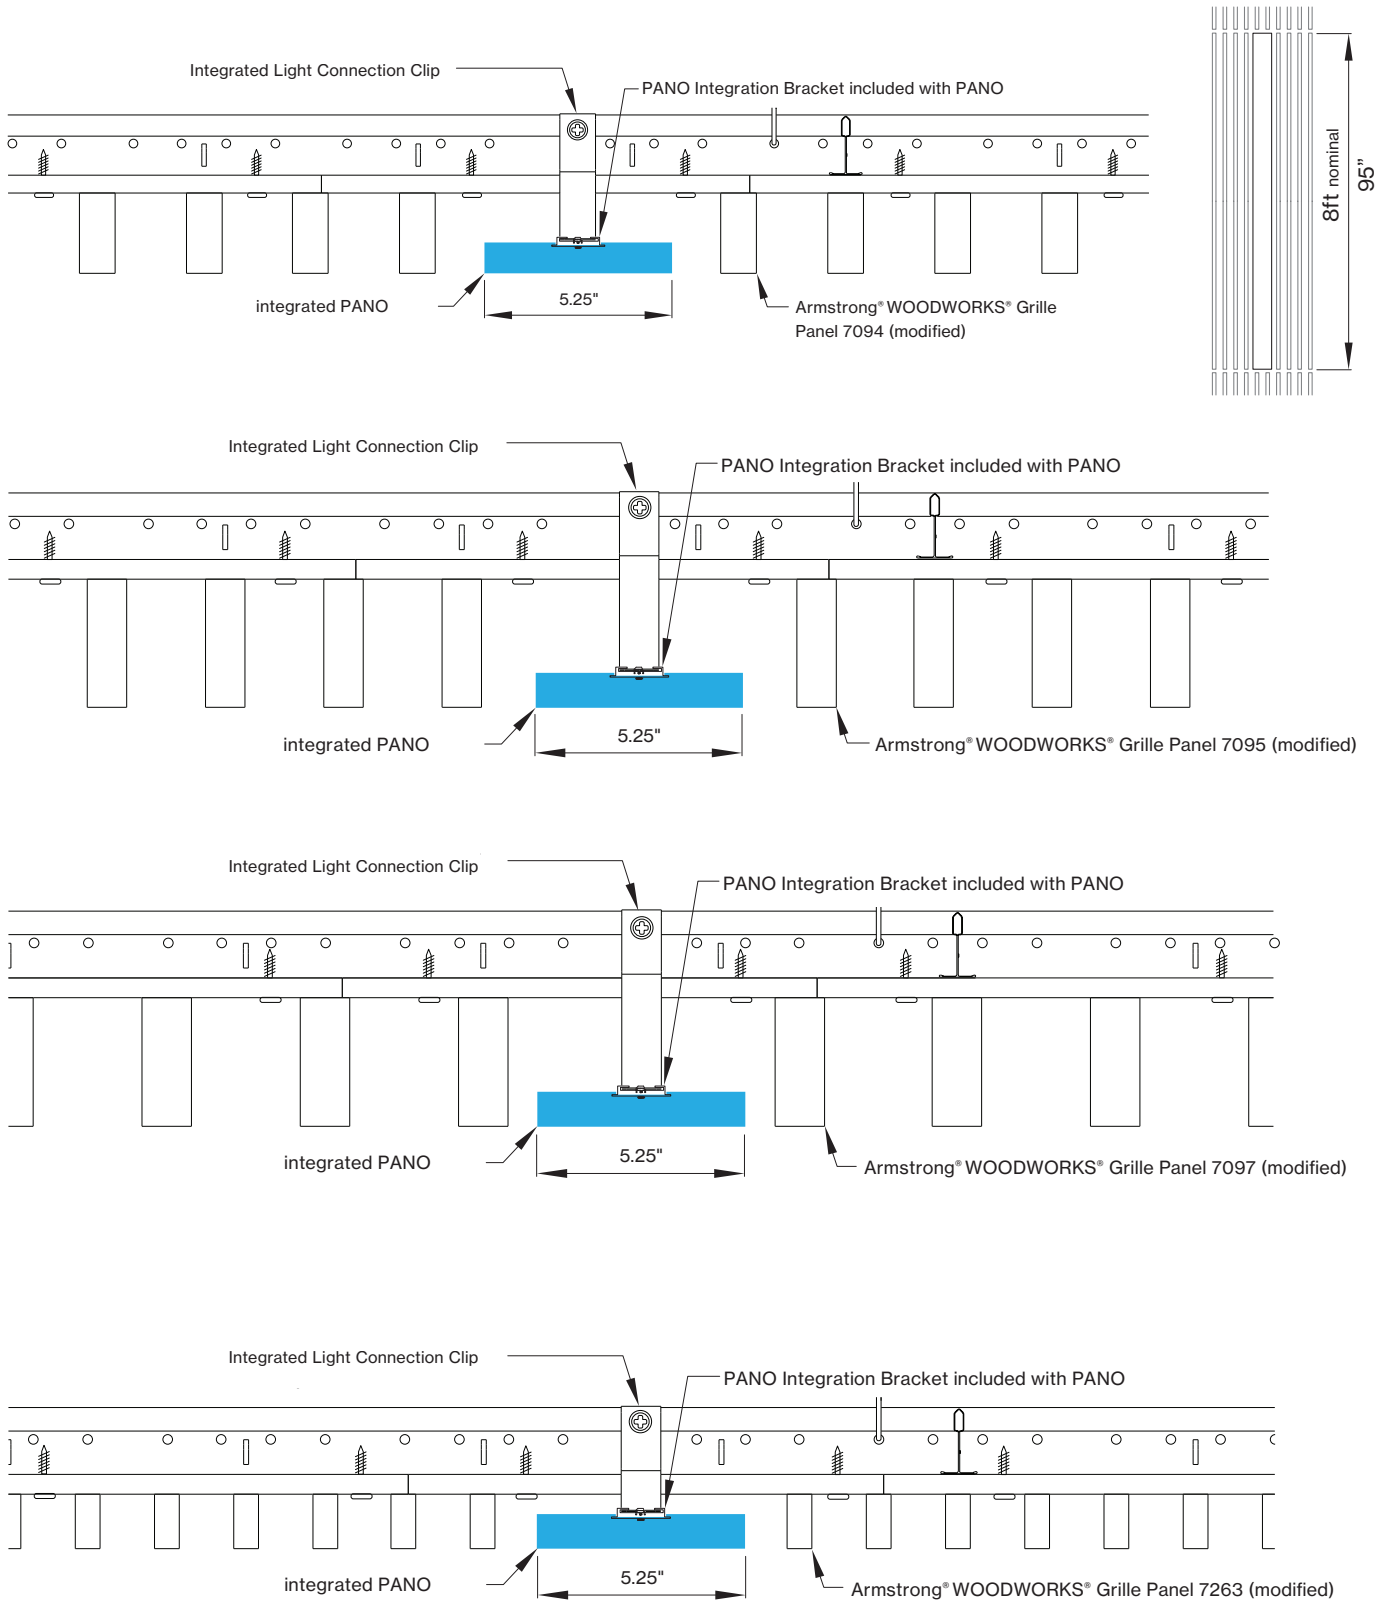

WWG - ARMSTRONG® WOODWORKS® GRILLE PANELS cont'd

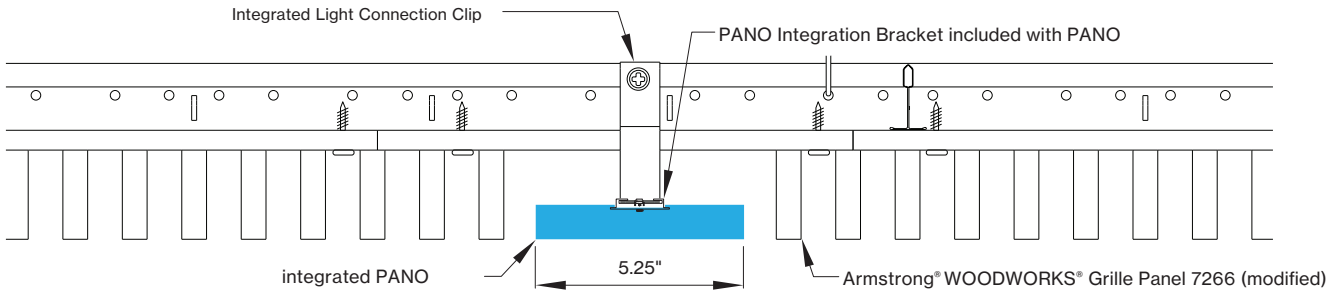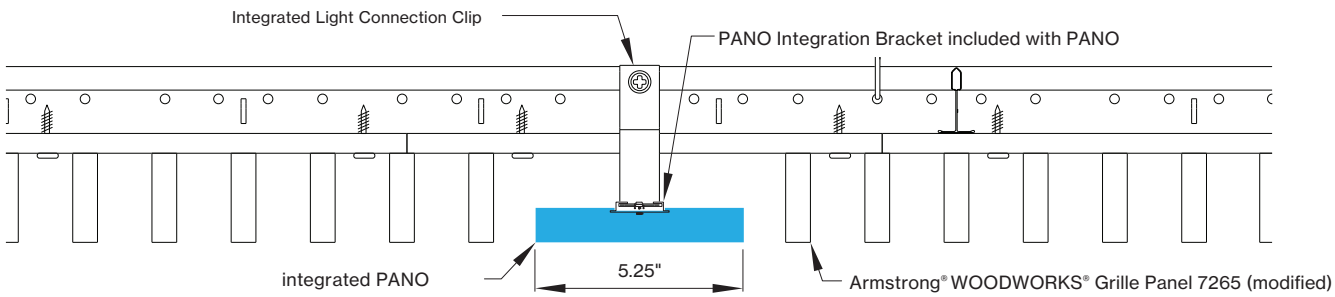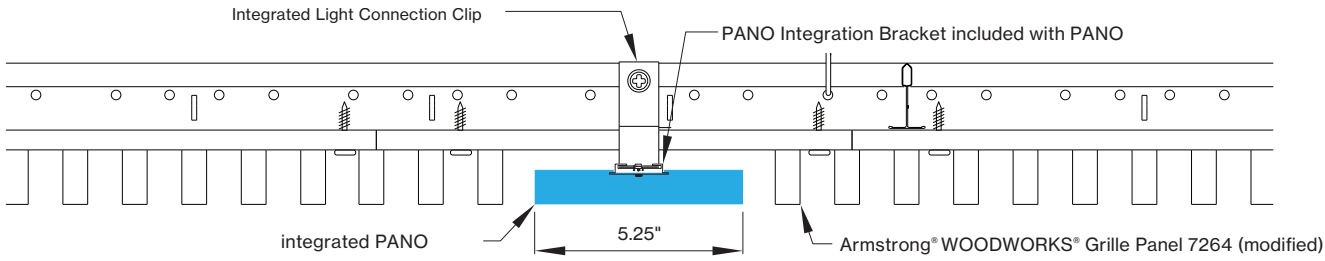

PANO mounting instructions

Get access to the PANO mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/pano>

