PANO 5.25"
WOODWORKS® GRILLE CLASSIC

5 YEAR limited led warranty

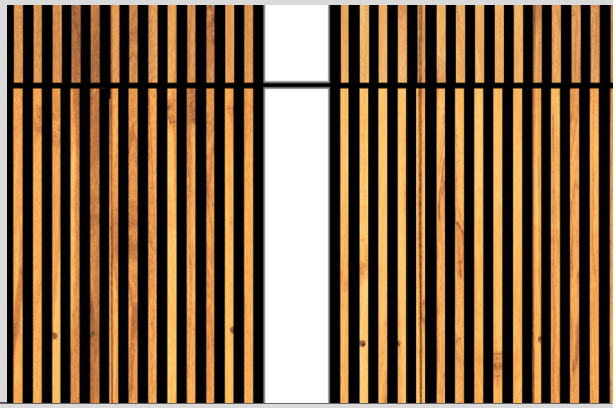

MOUNTING
Quick and easy electrical connection

REMOTE MOUNTING

PERFORMANCE
- Up to 109lm/W
- Lengths coordinates with Woodworks® Grille ceiling panel
- High performance opal cover
- Remote mountable LED driver
- Damp rated
- Customizable



COMPATIBLE CONTROLS & FEATURES

ATHENA WIRELESS NODE by LUTRON · nLIGHT · SENSOR READY · consult factory

CERTIFICATIONS & COMPLIANCE

cULus · RoHS compliant · Declare. RedList Approved

DIMENSIONS

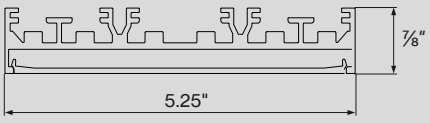

Catalog Number Example

PANO5-WWG-BL-PS-OP-27K-C80-UNV-010V-0550LF-ST-04FT

A B C D E F G H I J L M

A RANGE

PANO 5.25"	PANO5

B CEILING TYPE

WoodWorks® Grille	WWG

please contact your Armstrong® ceilings rep for the Integrated Light Connection Clip for the specified ceiling type

C COLOR

White	WH
Black	BL

D POWER FEED LENGTH

4' standard integrated	PS
10' medium remote option	PM
30' long remote option	PL

power feed distance denotes secondary wiring from detachable driver box to fixture; driver box comes with a 6ft conduit for primary wiring

E LENS

HP opal cover	OP

F CCT

2700K	27K
3000K	30K
3500K	35K
4000K	40K
Custom CCT	XXK

G CRI

CRI > 80	C80
CRI > 90	C90

H VOLTAGE

120V / 277V	UNV

I DIMMING

0-10V 1%	010V
Lutron EcoSystem Quantum, Vive, GRAFIK Eye, HomeWorks	LES1
Power over ethernet	POEC
consult customer service for compatibility	
Custom dimming	XXXX
consult customer service for compatibility	

J OUTPUT LM/FT

550lm/ft 100% ↧	0550LF
775lm/ft 100% ↧	0775LF
1000lm/ft 100% ↧	1000LF

K CIRCUIT / EM

Single circuit	*
* leave blank	
EMB EM battery pack	EMB

emergency battery pack only for 120/ 277V option
(90 minute emergency operation)

L SHAPE / PATTERN

Linear / straight	ST

M DIMENSIONS IN FT

4' fixture	04FT
6' fixture	06FT
8' fixture	08FT
Custom length Consult Factory	###IN

fixture replaces full length of ceiling panel; please see table on next page and fixture length dimensions

BASO
basolighting.com

Technical data

	SIZE TYPE	LEDCOLOR TEMPERATURE	INPUT WATTS	DELIVERED LMTOTAL	LIGHT DISTRIBUTION	DELIVERED LUMENDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
PANO 5.25"								
e LED	8' opal	40 K	35.4 W	4400 lm	100 % down	4400 lm	81 %	124 lm/W
e2 LED	8' opal	40 K	50.5 W	6200 lm	100 % down	6200 lm	81 %	123 lm/W
e2+ LED	8' opal	40 K	67.3 W	8000 lm	100 % down	8000 lm	81 %	119 lm/W

for 27 K, 30 K or 35 K multiply lm value by 0.96

WoodWorks® Grille Tegular Ceiling Integration

(for more ceiling options, please see CEILING OPTIONS pages)

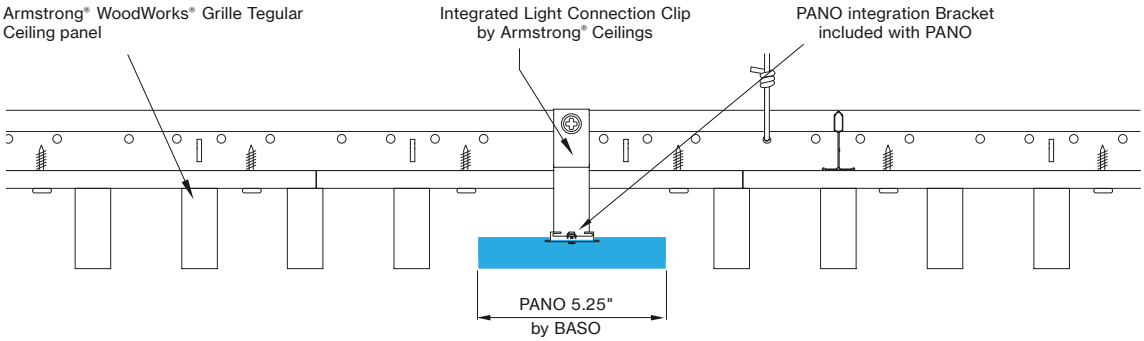

Available lengths for ceiling types

CEILING TYPE	2 FT	4 FT	6 FT	8 FT
WoodWorks® Grille Tegular 9/16	23.375"	47.375"	n/a	n/a
WoodWorks® Grille Tegular 15/16	23"	47"	n/a	n/a
WoodWorks® Grille Classic	23"	47"	71"	95"
WoodWorks® Grille Forte	*23"	47"	71"	95"
WoodWorks® Linear Solid Wood panels	*23"	*47"	*71"	95"
WoodWorks® Linear Veneered panels	*23"	*47"	*71"	95.25"

*Woodworks ceilings are not available in this length. Wood panels need to be cut in the field to fit this length.

INTEGRATED LIGHT CONNECTION CLIP

Armstrong® Ceilings Integrated Light Connection Clip	visit armstrongceilings.com /linearlighting

please contact your Armstrong Ceilings rep

OPTIONAL Integrated Light Connection Clip (by BASO)	ACC-PANO-FC-2

Optional to be ordered from BASO with the fixture

Quantity needed per fixture

Length	Qty
2FT	2
4FT	3
6FT	4
8FT	4

WoodWorks® ceiling systems

BASO PANO is only approved for Armstrong® WoodWorks Grille Tegular 9/16, WoodWorks Grille Tegular 15/16, WoodWorks Grille, WoodWorks Linear Solid Wood panels and WoodWorks Linear Veneered panels ceiling systems.
Refer to armstrongceilings.com for installation instructions related to the ceiling products.

WWG - ARMSTRONG® WOODWORKS® GRILLE PANELS

WWG view from below

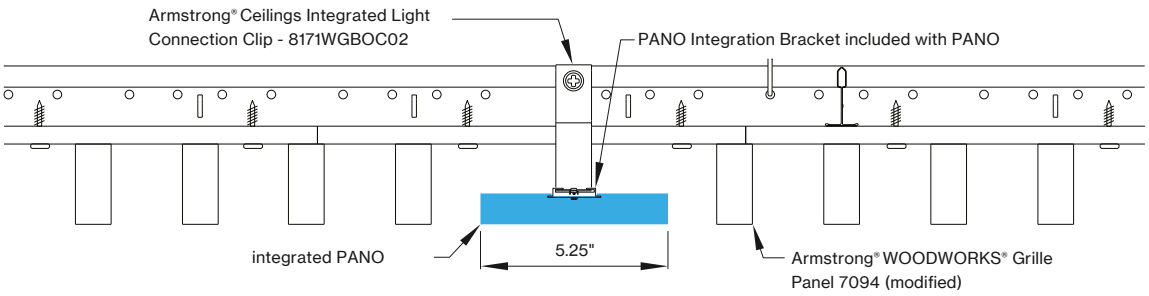

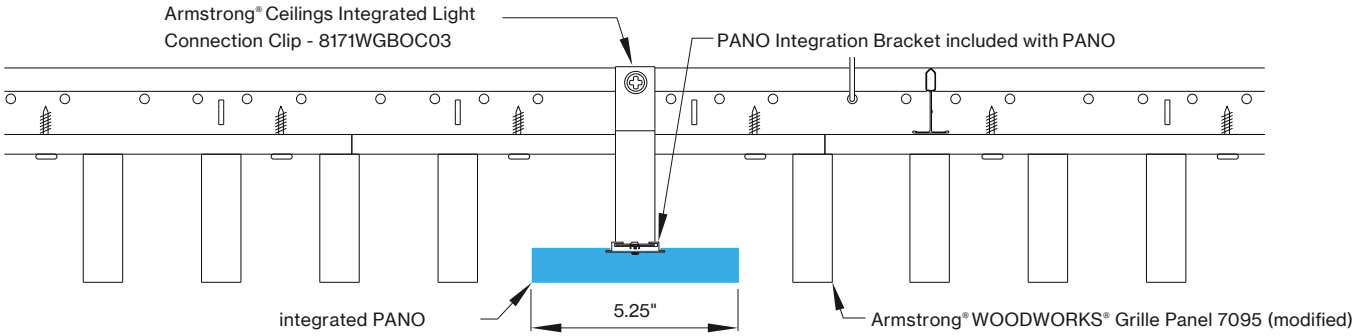

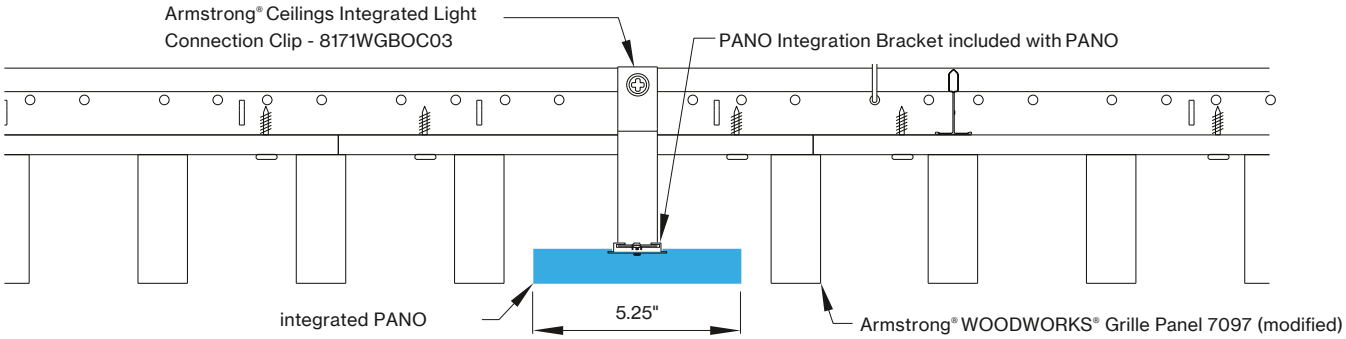

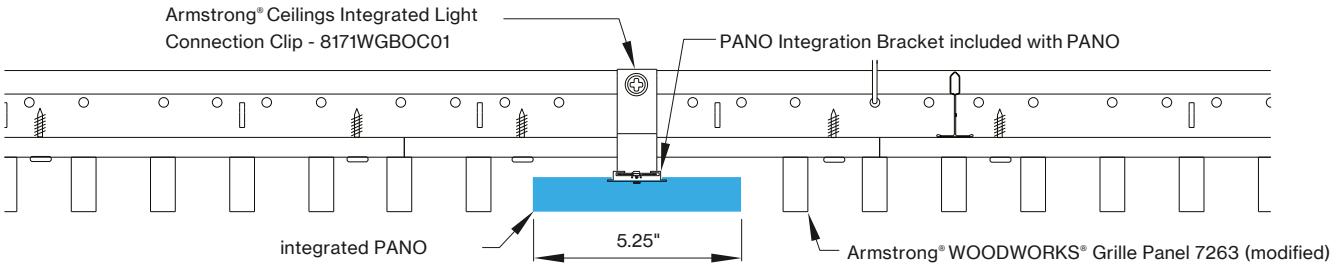

WWG - ARMSTRONG® WOODWORKS® GRILLE PANELS cont'd

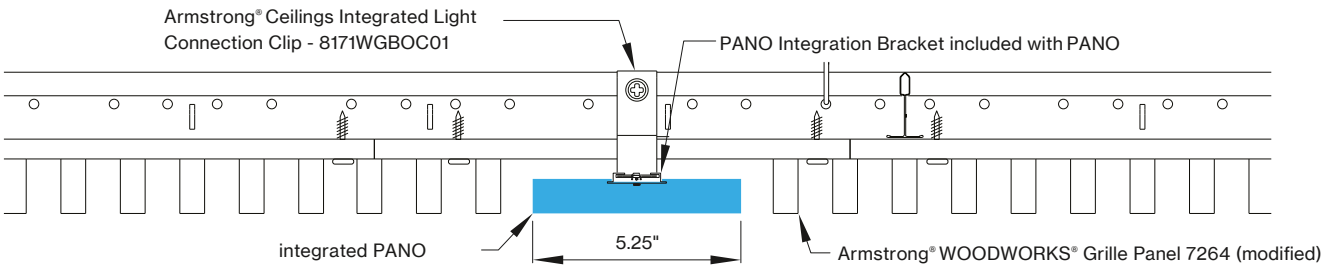

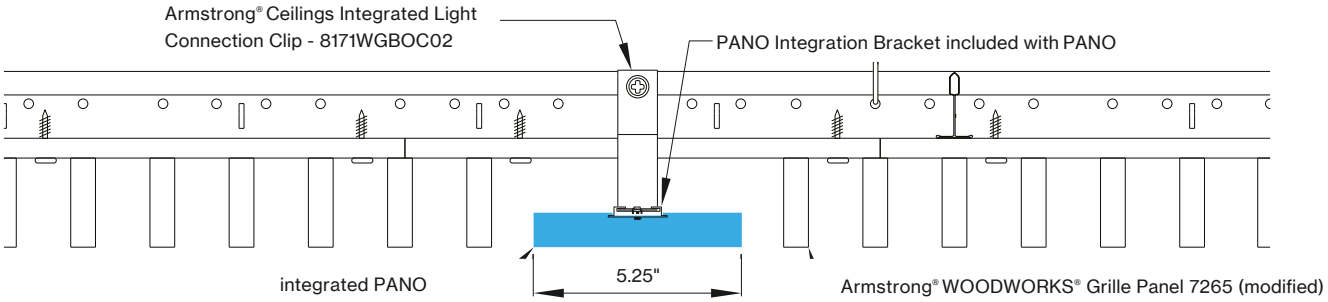

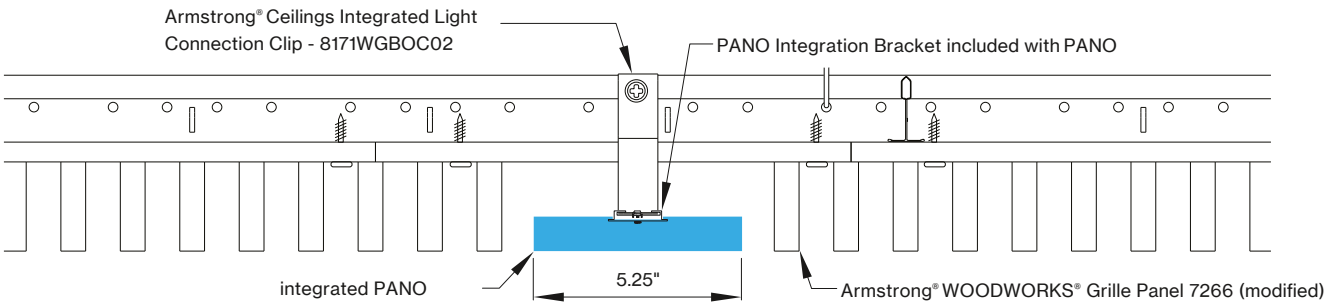

PANO mounting instructions

Get access to the PANO mounting instructions faster by scanning the QR code.

https://www.basolighting.com/resources/mounting-instructions/pano