# PANO 3.25"
## WOODWORKS® GRILLE FORTÉ

5 YEAR limited led warranty

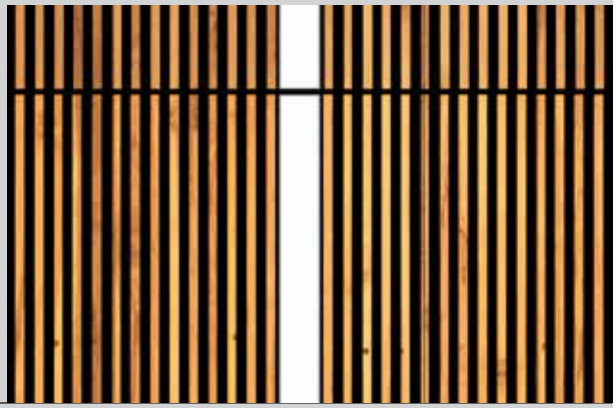

### MOUNTING
Quick and easy electrical connection

REMOTE MOUNTING

### PERFORMANCE

- Up to 122lm/W
- Coordinates with Woodworks® Grille Forte ceiling panel
- High performance opal cover
- Remote mountable LED driver
- Damp rated
- Customizable



### COMPATIBLE CONTROLS & FEATURES

ATHENA WIRELESS NODE by LUTRON · nLIGHT · SENSOR READY · consult factory

### CERTIFICATIONS & COMPLIANCE

cULus · RoHS compliant · Declare. RedList Approved

### DIMENSIONS




### Catalog Number Example

PANO3-WGF-BL-PS-OP-27K-C80-UNV-010V-0675LF-ST-04FT

A B C D E F G H I J L M

**A RANGE**

| | |
|---|---|
| PANO 3.25" | PANO3 |

**B CEILING TYPE**

| | |
|---|---|
| WoodWorks® Grille Forte | WGF |

**C COLOR**

| | |
|---|---|
| White | WH |
| Black | BL |

**D POWER FEED LENGTH**

| | |
|---|---|
| 4' standard integrated | PS |
| 10' medium remote option | PM |
| 30' long remote option | PL |

power feed distance denotes secondary wiring from detachable driver box to fixture; driver box comes with a 6ft conduit for primary wiring

**E LENS**

| | |
|---|---|
| HP opal cover | OP |

**F CCT**

| | |
|---|---|
| 2700K | 27K |
| 3000K | 30K |
| 3500K | 35K |
| 4000K | 40K |
| Custom CCT | XXK |

**G CRI**

| | |
|---|---|
| CRI > 80 | C80 |
| CRI > 90 | C90 |

**H VOLTAGE**

| | |
|---|---|
| 120V / 277V | UNV |

**I DIMMING**

| | |
|---|---|
| 0-10V 1% | 010V |
| Lutron EcoSystem<br>Quantum, Vive, GRAFIK Eye, HomeWorks | LES1 |
| Power over ethernet<br>consult customer service for compatibility | POEC |
| Custom dimming<br>consult customer service for compatibility | XXXX |

**J OUTPUT LM/FT**

| | |
|---|---|
| 450lm/ft 100% ↧ | 0450LF |
| 675lm/ft 100% ↧ | 0675LF |
| 875lm/ft 100% ↧ | 0875LF |

**K CIRCUIT / EM**

| | |
|---|---|
| Single circuit<br>* leave blank | * |
| EMB EM battery pack<br>emergency battery pack only for 120/ 277V option (90 minute emergency operation) | EMB |

**L SHAPE / PATTERN**

| | |
|---|---|
| Linear / straight | ST |

**M DIMENSIONS IN FT**

| | |
|---|---|
| 4' fixture | 04FT |
| 6' fixture | 06FT |
| 8' fixture | 08FT |
| Custom length<br>Consult Factory | ###IN |

fixture replaces full length of ceiling panel; please see table on next page and fixture length dimensions

BASO
basolighting.com

## Technical data

| | SIZE TYPE | LEDCOLOR TEMPERATURE | INPUT WATTS | DELIVERED LMTOTAL | LIGHT DISTRIBUTION | DELIVERED LUMENDIRECT | OPTICAL EFFICIENCY | LUMINAIRE EFFICACY |
|---|---|---|---|---|---|---|---|---|
| **PANO 3.25"** | | | | | | | | |
| e LED | 8' opal | 40K | 29.5W | 3600lm | 100% down | 3600lm | 79% | 122lm/W |
| e2LED | 8' opal | 40K | 44.7W | 5400lm | 100% down | 5400lm | 79% | 121 lm/W |
| e2+ LED | 8' opal | 40K | 58.9W | 7000lm | 100% down | 7000lm | 79% | 119lm/W |

for 27K, 30K or 35K multiply lm value by 0.96

## WoodWorks® Grille Ceiling Integration

(for more ceiling options, please see CEILING OPTIONS pages)

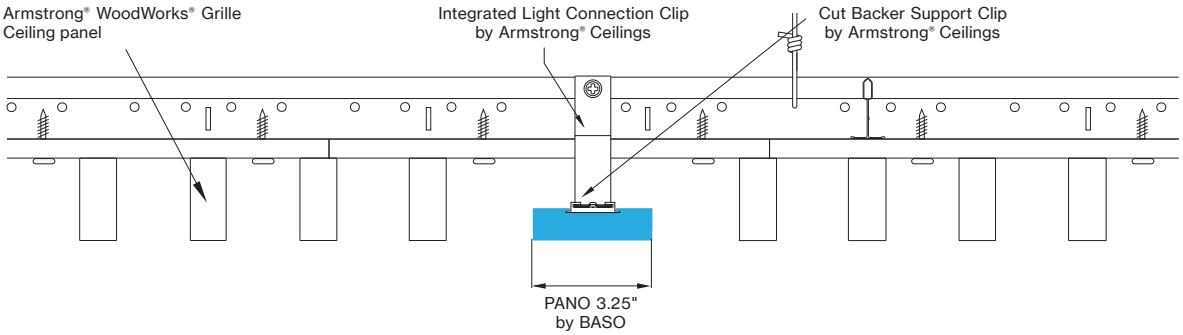


## Available lengths for ceiling types

WGF view from below

| CEILING TYPE | 2FT | 4FT | 6FT | 8FT |
|---|---|---|---|---|
| WoodWorks® Grille Tegular 9/16 | 23.375" | 47.375" | n/a | n/a |
| WoodWorks® Grille Tegular 15/16 | 23" | 47" | n/a | n/a |
| WoodWorks® Grille Classic | 23" | 47" | 71" | 95" |
| WoodWorks® Grille Forte | *23" | 47" | 71" | 95" |
| WoodWorks® Linear Solid Wood panels | *23" | *47" | *71" | 95" |
| WoodWorks® Linear Veneered panels | *23" | *47" | *71" | 95.25" |

*Woodworks ceilings are not available in this length. Wood panels need to be cut in the field to fit this length.

### INTEGRATED LIGHT CONNECTION CLIP

| | |
|---|---|
| Integrated Light Connection Clip | ACC-PANO-FC-2 |

Required to be ordered with the fixture

### Quantity needed per fixture

| Length | Qty |
|---|---|
| 8FT | 4 |
| 6FT | 4 |
| 4FT | 3 |
| 2FT | 2 |

# PANO 3.25"

## WWG - ARMSTRONG® WOODWORKS® GRILLE PANELS

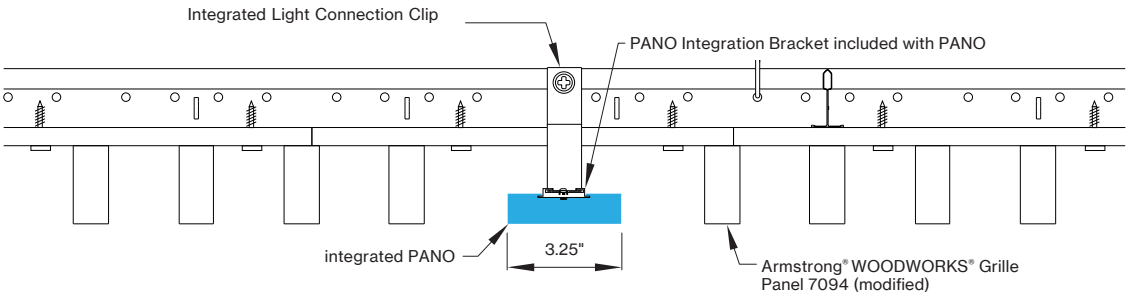


WGF view from below

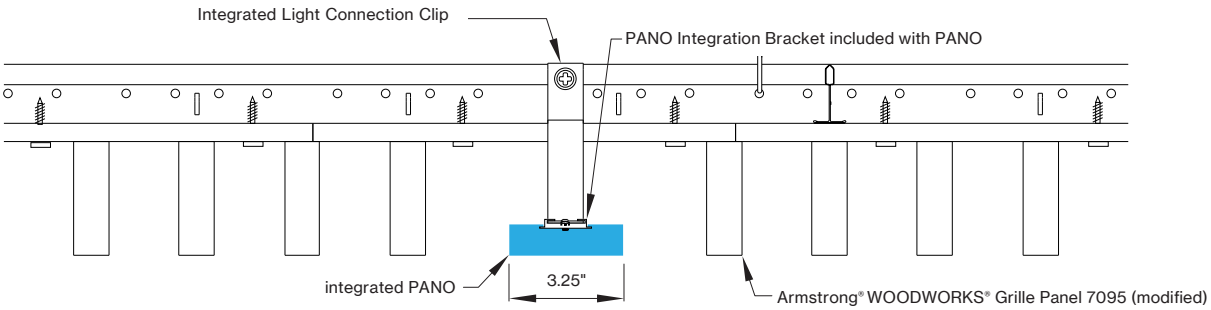


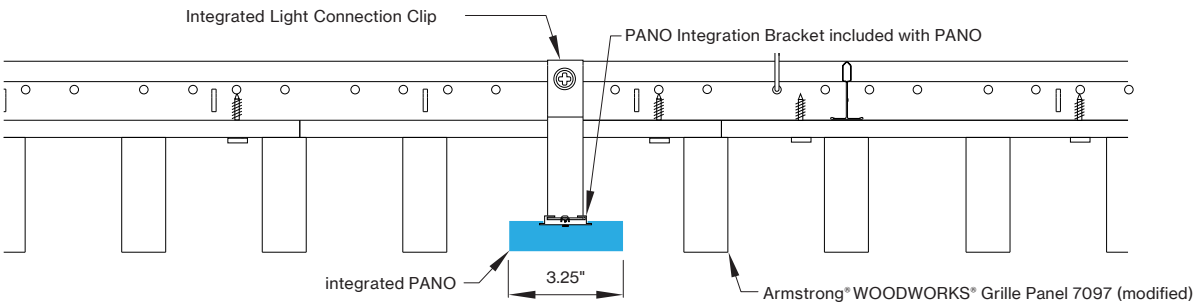


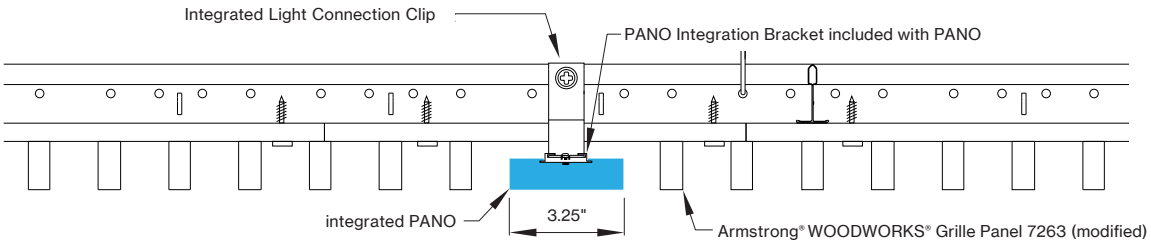


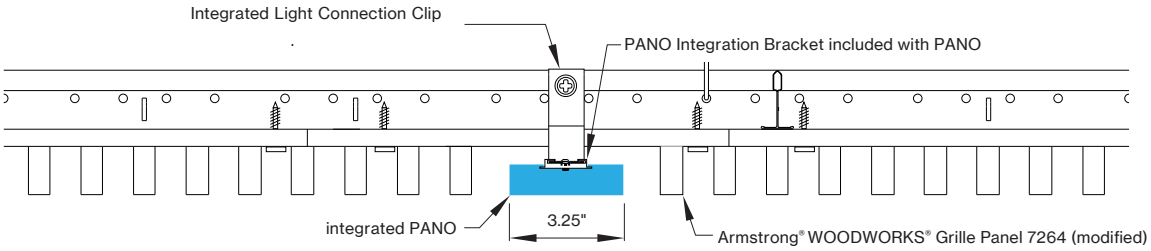

## WWG - ARMSTRONG® WOODWORKS® GRILLE PANELS cont'd

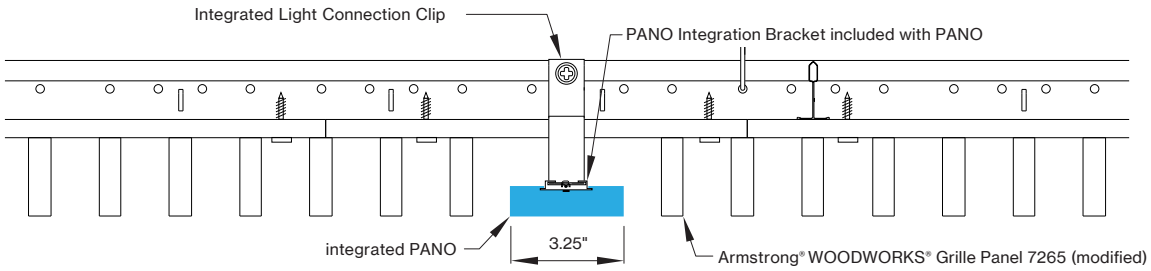


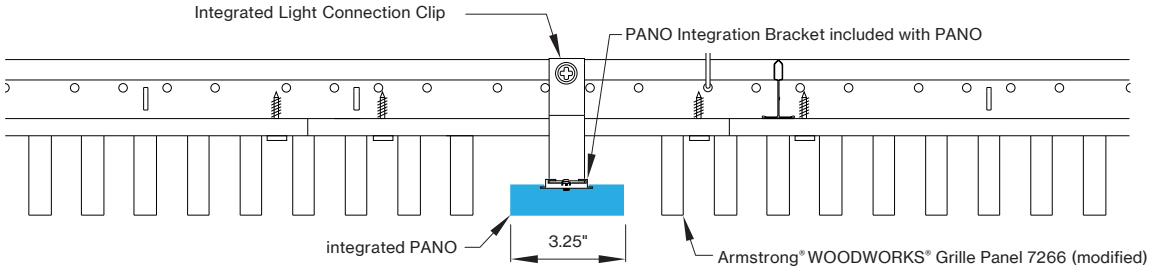


### PANO mounting instructions

Get access to the PANO mounting instructions faster by scanning the QR code.

https://www.basolighting.com/resources/mounting-instructions/pano