


# PANO 5.25"

## WOODWORKS® GRILLE FORTÉ



### CERTIFICATIONS & COMPLIANCE

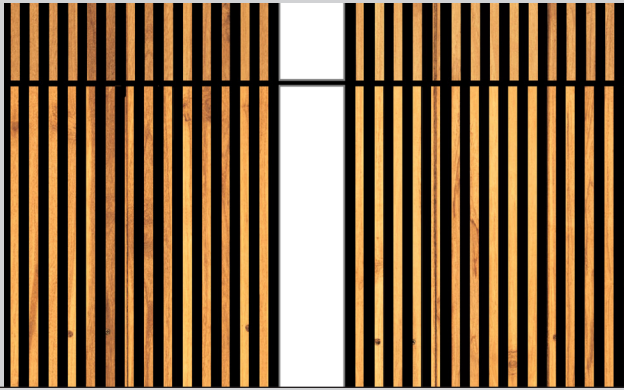


### FEATURES




### PERFORMANCE

- Coordinates with Woodworks® Grille ceiling panel
- Up to 124lm/W
- High performance opal cover
- Remote mountable LED driver
- Damp rated



### WoodWorks® Grille Tegular Ceiling Integration

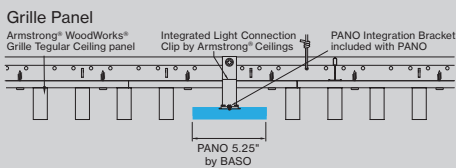

### INTEGRATED DRIVER / REMOTE MOUNTING

Quick and easy electrical connection

#### REMOTE MOUNTING



### Catalog Number Example

PANO5-WWG-BL-PM-OP-27K-C80-UNV-DALI-0550LF-ST-04FT



#### A RANGE

PANO 5.25" P A N O 5

#### H VOLTAGE

120V / 277V U N V

#### B CEILING TYPE

WoodWorks® Grille W W G

please contact your Armstrong® ceilings rep for the Integrated Light Connection Clip for the specified ceiling type

#### I DIMMING

0-10V 1% 0 1 0 V

Lutron EcoSystem L E S 1  
Quantum, Vive, GRAFIK Eye, HomeWorks

Power over ethernet P O E C

consult customer service for compatibility

Custom dimming X X X X

consult customer service for compatibility

#### C COLOR

White W H

Black B L

#### D POWER FEED LENGTH

4' standard integrated P S

10' medium remote option P M

30' long remote option P L

power feed distance denotes secondary wiring from detachable driver box to fixture; driver box comes with a 6ft conduit for primary wiring

#### J OUTPUT LM/FT

550lm/ft 100% ‡ 0 5 5 0 L F

775lm/ft 100% ‡ 0 7 7 5 L F

1000lm/ft 100% ‡ 1 0 0 0 L F

#### K CIRCUIT / EM

Single circuit \*

\* leave blank

EMB EM battery pack E M B

emergency battery pack only for 120/ 277V option (90 minute emergency operation)

#### E LENS

HP opal cover O P

#### F CCT

2700K 2 7 K

3000K 3 0 K

3500K 3 5 K

4000K 4 0 K

Custom CCT X X K

#### L SHAPE / PATTERN

Linear / straight S T

#### G CRI

CRI > 80 C 8 0

CRI > 90 C 9 0

#### M DIMENSIONS IN FT

4' fixture 0 4 F T

6' fixture 0 6 F T

8' fixture 0 8 F T

fixture replaces full length of ceiling panel; please see table on next page and fixture length dimensions

BASO

basolighting.com

CS-V01

03/2025


## Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LUMEN DIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
<b>PANO 5.25"</b>								
e LED	8' opal	40 K	35.4 W	4400lm	100% down	4400lm	81%	110lm/W
e <sup>2</sup> LED	8' opal	40 K	50.5 W	6200lm	100% down	6200lm	81%	106lm/W
e <sup>2+</sup> LED	8' opal	40 K	67.3 W	8000lm	100% down	8000lm	81%	98lm/W

for 27 K, 30 K or 35 K multiply lm value by 0.96

## WoodWorks® Grille Tegular Ceiling Integration

(for more ceiling options, please see CEILING OPTIONS pages)

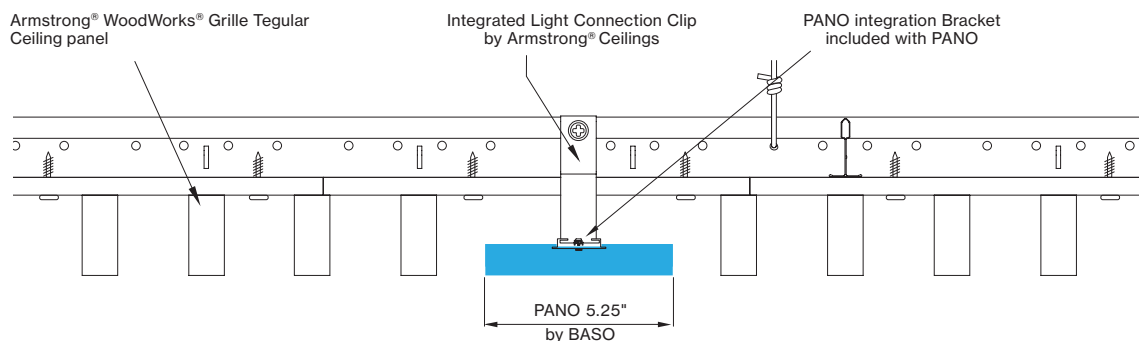

## Available lengths for ceiling types

CEILING TYPE	2 FT	4 FT	6 FT	8 FT
WoodWorks® Grille Tegular 9/16	23.375"	47.375"	n/a	n/a
WoodWorks® Grille Tegular 15/16	23"	47"	n/a	n/a
WoodWorks® Grille Classic	23"	47"	71"	95"
WoodWorks® Grille Forte	*23"	47"	71"	95"
WoodWorks® Linear Solid Wood panels	*23"	*47"	*71"	95"
WoodWorks® Linear Veneered panels	*23"	*47"	*71"	95.25"

\*Woodworks ceilings are not available in this length. Wood panels need to be cut in the field to fit this length.

## INTEGRATED LIGHT CONNECTION CLIP

Armstrong® Ceilings Integrated Light Connection Clip

visit [armstrongceilings.com/linearlighting](http://armstrongceilings.com/linearlighting)

please contact your Armstrong Ceilings rep






## WoodWorks® ceiling systems

BASO PANO is only approved for Armstrong® WoodWorks Grille Tegular 9/16, WoodWorks Grille Tegular 15/16, WoodWorks Grille, WoodWorks Linear Solid Wood panels and WoodWorks Linear Veneered panels ceiling systems. Refer to [armstrongceilings.com](http://armstrongceilings.com) for installation instructions related to the ceiling products.




DIMENSIONS

WWG - ARMSTRONG® WOODWORKS® GRILLE PANELS

WWG view from below

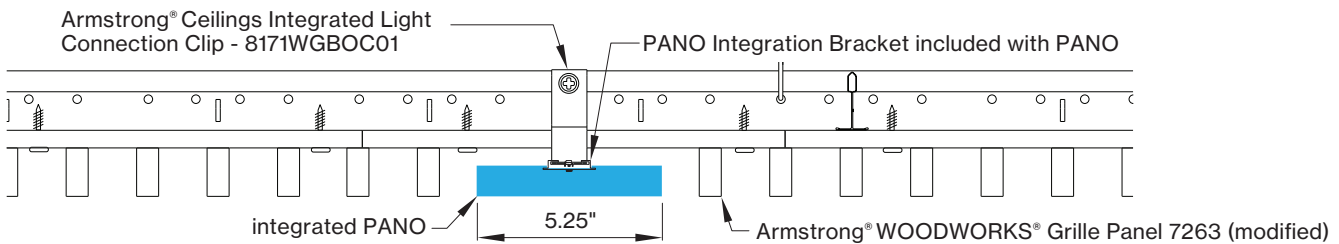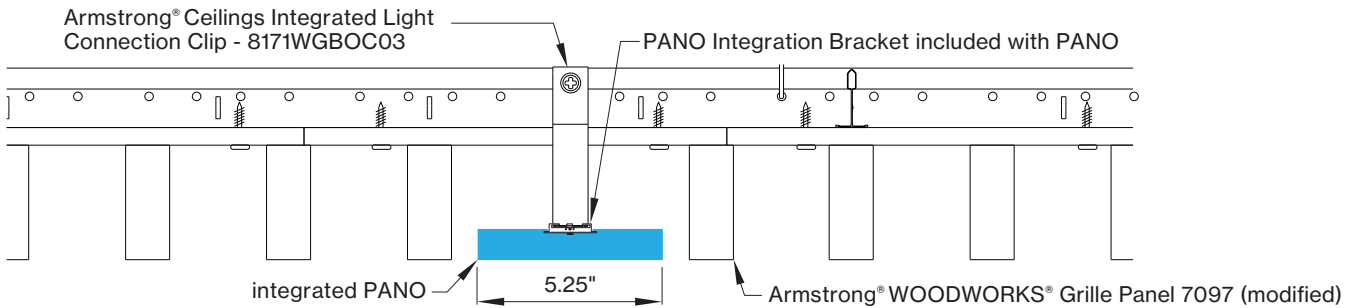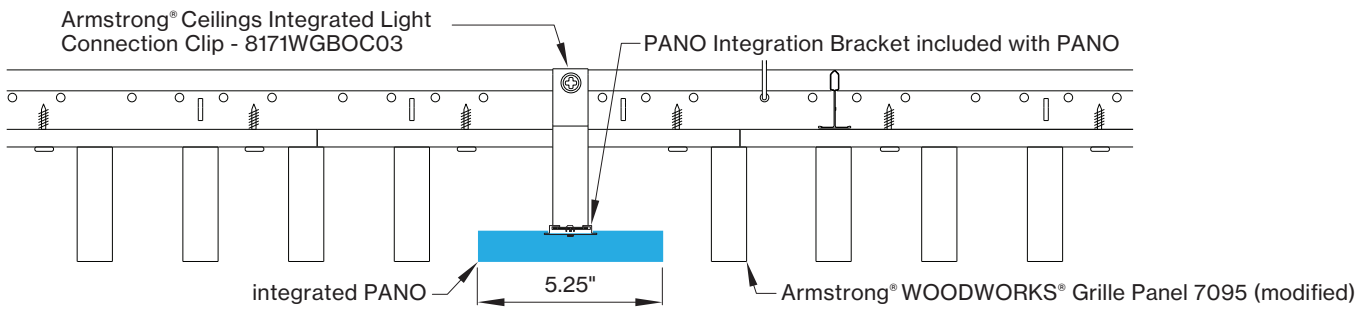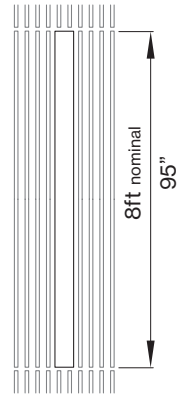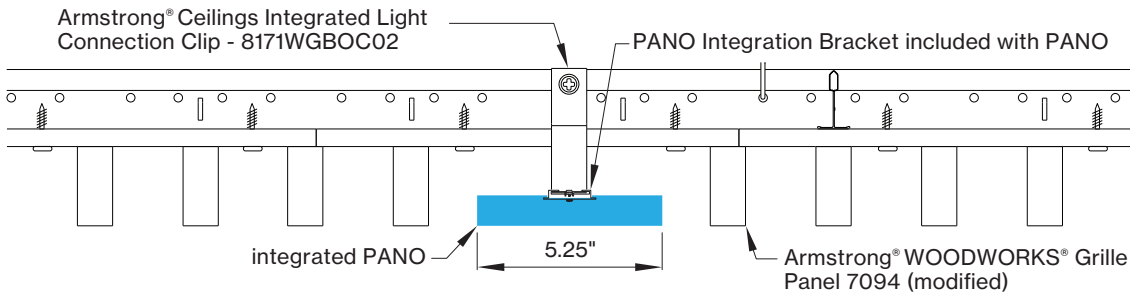

WWG - ARMSTRONG® WOODWORKS® GRILLE PANELS cont'd

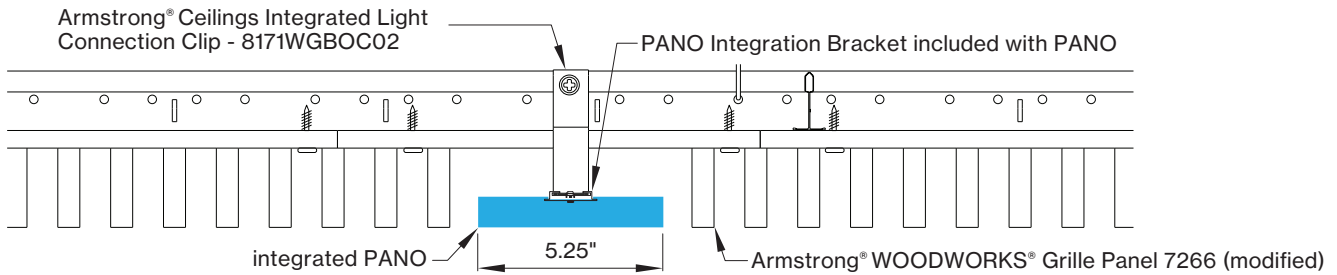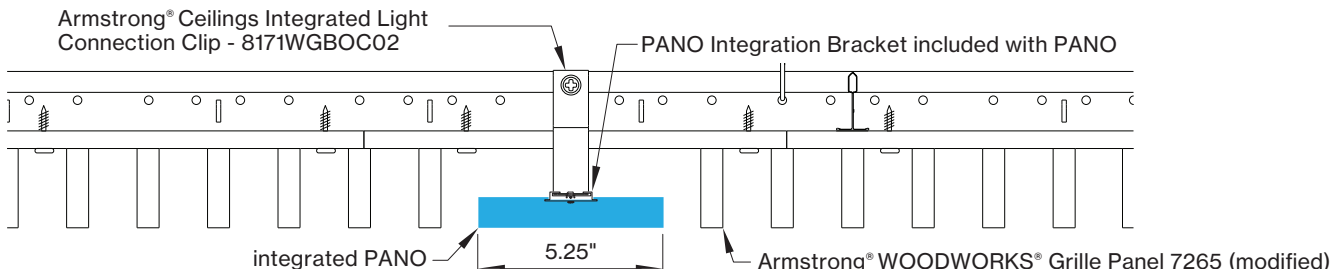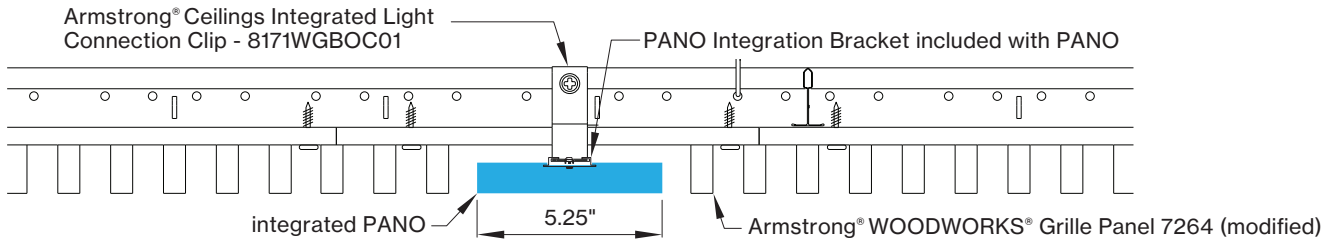

**PANO mounting instructions**

Get access to the PANO mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/pano>

