PANO 5.25"

WOODWORKS®

GRILLE TEGULAR 9/16 & 15/16 INTEGRATION

5 YEAR limited led warranty

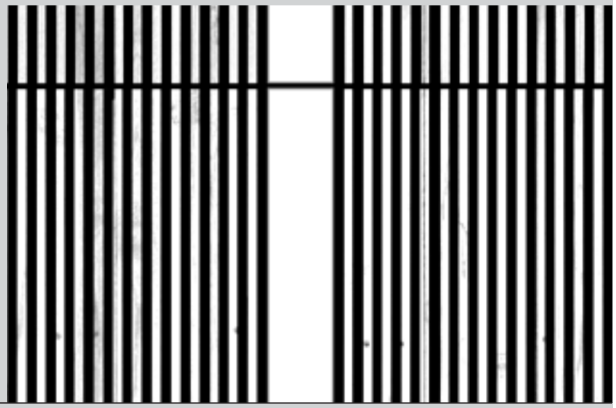

MOUNTING

Quick and easy electrical connection

REMOTE MOUNTING

PERFORMANCE

- Up to 124lm/W
- Coordinates with Woodworks® Grille Tegular & Integration ceiling panel
- High performance opal cover
- Remote mountable LED Driver
- Damp rated
- Customizable



COMPATIBLE CONTROLS & FEATURES

ATHENA WIRELESS NODE by LUTRON · nLIGHT · SENSOR READY · consult factory

CERTIFICATIONS & COMPLIANCE

cULus · RoHS compliant · Declare. RedList Approved

DIMENSIONS



Catalog Number Example

PANO5-WT9-BL-PS-OP-27K-C80-UNV-010V-0550LF-ST-02FT

A B C D E F G H I J L M

A RANGE

PANO 5.25"	PANO5

B CEILING TYPE

WoodWorks® Grille Tegular 9/16	WT9
WoodWorks® Grille Tegular 15/16	WT5

please contact your Armstrong® ceilings rep for the Integrated Light Connection Clip for the specified ceiling type

C COLOR

White	WH
Black	BL

D POWER FEED LENGTH

4' standard integrated	PS
10' medium remote option	PM
30' long remote option	PL

power feed distance denotes secondary wiring from detachable driver box to fixture; driver box comes with a 6 ft conduit for primary wiring

E LENS

HP opal cover	OP

F CCT

2700K	27K
3000K	30K
3500K	35K
4000K	40K
Custom CCT	XXK

G CRI

CRI > 80	C80
CRI > 90	C90

H VOLTAGE

120V / 277V	UNV

I DIMMING

0-10V 1%	010V
Lutron EcoSystem Quantum, Vive, GRAFIK Eye, HomeWorks	LES1
Power over ethernet consult customer service for compatibility	POEC
Custom dimming consult customer service for compatibility	XXXX

J OUTPUT LM/FT

550lm/ft 100% ↧	0550LF
775lm/ft 100% ↧	0775LF
1000lm/ft 100% ↧	1000LF

K CIRCUIT / EM

Single circuit * leave blank	*
EMB EM battery pack emergency battery pack only for 120/ 277V option (90 minute emergency operation)	EMB

L SHAPE / PATTERN

Linear / straight	ST

M DIMENSIONS IN FT

2' fixture	02FT
4' fixture	04FT
Custom length Consult Factory	###IN

fixture replaces full length of ceiling panel slats; please see table on next page and fixture length dimensions

BASO

basolighting.com

Technical data

	SIZE TYPE	LEDCOLOR TEMPERATURE	INPUT WATTS	DELIVERED LMTOTAL	LIGHT DISTRIBUTION	DELIVERED LUMENDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
PANO 5.25"								
e LED	2' opal	40K	10.4W	1100lm	100% down	1100lm	69%	110lm/W
	4' opal		20.7W	2200lm		2200lm		110lm/W
e2LED	2' opal	40K	15W	1550lm	100% down	1550lm	69%	106lm/W
	4' opal		30W	3100lm		3100lm		106lm/W
e2+ LED	2' opal	40K	20.4W	2000lm	100% down	2000lm	69%	98lm/W
	4' opal		40.8W	4000lm		4000lm		98lm/W

for 27K, 30K or 35K multiply lm value by 0.96

WoodWorks® Grille Tegular Ceiling Integration

(for more ceiling options, please see CEILING OPTIONS pages)

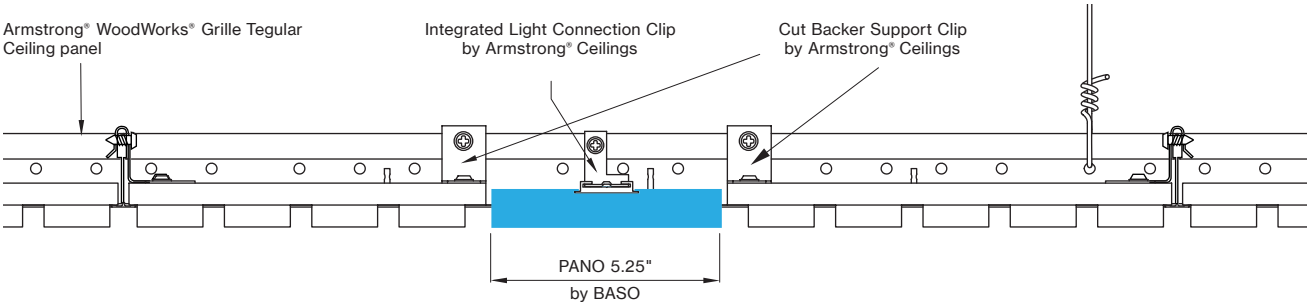

Available lengths for ceiling types

CEILING TYPE	2FT	4FT	6FT	8FT
WoodWorks® Grille Tegular 9/16	23.375"	47.375"	n/a	n/a
WoodWorks® Grille Tegular 15/16	23"	47"	n/a	n/a
WoodWorks® Grille Classic	23"	47"	71"	95"
WoodWorks® Grille Forte	*23"	47"	71"	95"
WoodWorks® Linear Solid Wood panels	*23"	*47"	*71"	95"
WoodWorks® Linear Veneered panels	*23"	*47"	*71"	95.25"

*Woodworks ceilings are not available in this length. Wood panels need to be cut in the field to fit this length.

INTEGRATED LIGHT CONNECTION CLIP

Armstrong® Ceilings Integrated Light Connection Clip	visit armstrongceilings.com /linearlighting

please contact your Armstrong Ceilings rep

WoodWorks® ceiling systems

BASO PANO is only approved for Armstrong® WoodWorks Grille Tegular 9/16, WoodWorks Grille Tegular 15/16, WoodWorks Grille, WoodWorks Linear Solid Wood panels and WoodWorks Linear Veneered panels ceiling systems.
Refer to armstrongceilings.com for installation instructions related to the ceiling products.

PANO 5.25"

WT9 - ARMSTRONG® WOODWORKS® GRILLE TEGULAR 9/16 PANELS

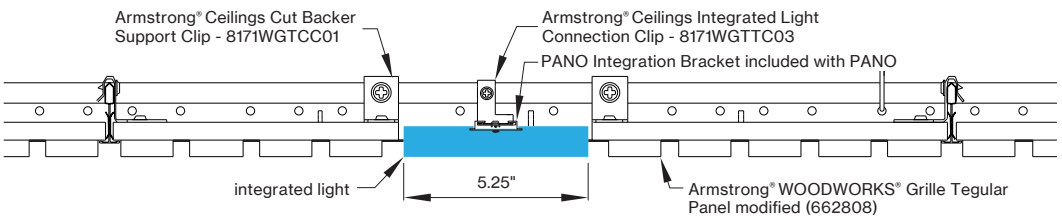

WT9 view from below



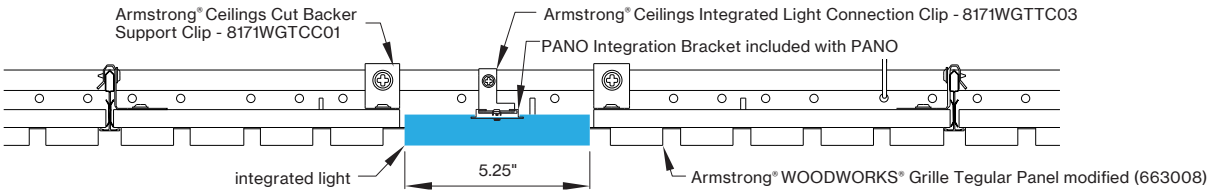

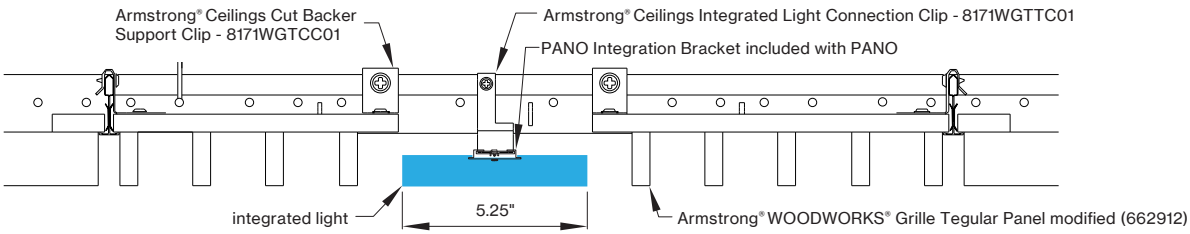

WT5 - ARMSTRONG® WOODWORKS® GRILLE TEGULAR 15/16 PANELS

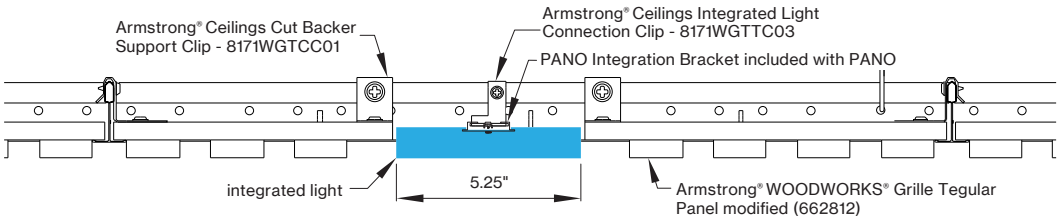

WT5 view from below



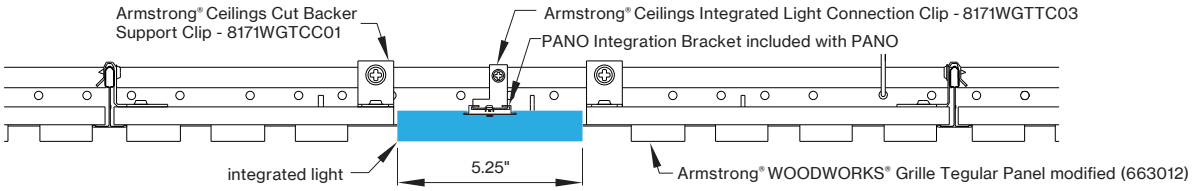

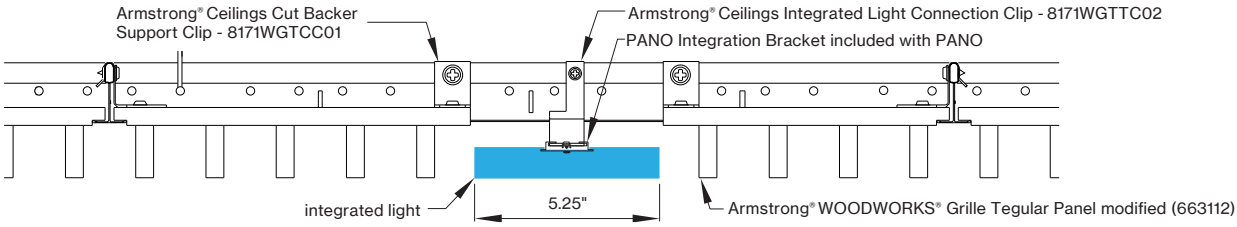

PANO mounting instructions

Get access to the PANO mounting instructions faster by scanning the QR code.

https://www.basolighting.com/resources/mounting-instructions/pano