# PANO 3.25"

## WOODWORKS®

GRILLE TEGULAR 9/16 & 15/16 INTEGRATION

5 YEAR limited led warranty

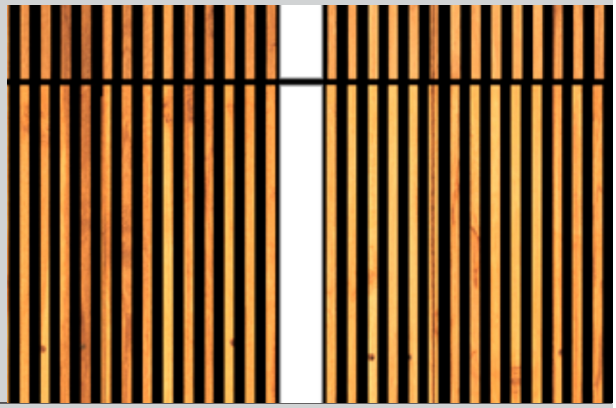

### MOUNTING

Quick and easy electrical connection

REMOTE MOUNTING

### PERFORMANCE

- Up to 122lm/W
- Coordinates with Woodworks® Grille Tegular & integration ceiling panel
- High performance opal cover
- Remote mountable LED driver
- Damp rated
- Customizable



### COMPATIBLE CONTROLS & FEATURES

ATHENA WIRELESS NODE by LUTRON · nLIGHT · SENSOR READY · consult factory

### CERTIFICATIONS & COMPLIANCE

cULus · RoHS compliant · Declare. RedList Approved

### DIMENSIONS




### Catalog Number Example

PANO3-WT9-BL-PS-OP-27K-C80-UNV-010V-0450LF-ST-02FT

A B C D E F G H I J L M

### A RANGE

| | |
|---|---|
| PANO 3.25" | PANO3 |

### B CEILING TYPE

| | |
|---|---|
| WoodWorks® Grille Tegular 9/16 | WT9 |
| WoodWorks® Grille Tegular 15/16 | WT5 |

please contact your Armstrong® ceilings rep for the Integrated Light Connection Clip for the specified ceiling type

### C COLOR

| | |
|---|---|
| White | WH |
| Black | BL |

### D POWER FEED LENGTH

| | |
|---|---|
| 4' standard integrated | PS |
| 10' medium remote option | PM |
| 30' long remote option | PL |

power feed distance denotes secondary wiring from detachable driver box to fixture; driver box comes with a 6ft conduit for primary wiring

### E LENS

| | |
|---|---|
| HP opal cover | OP |

### F CCT

| | |
|---|---|
| 2700K | 27K |
| 3000K | 30K |
| 3500K | 35K |
| 4000K | 40K |
| Custom CCT | XXK |

### G CRI

| | |
|---|---|
| CRI > 80 | C80 |
| CRI > 90 | C90 |

### H VOLTAGE

| | |
|---|---|
| 120V / 277V | UNV |

### I DIMMING

| | |
|---|---|
| 0-10V 1% | 010V |
| Lutron EcoSystem<br>Quantum, Vive, GRAFIK Eye, HomeWorks | LES1 |
| Power over ethernet<br>consult customer service for compatibility | POEC |
| Custom dimming<br>consult customer service for compatibility | XXXX |

### J OUTPUT LM/FT

| | |
|---|---|
| 450lm/ft 100% ↧ | 0450LF |
| 675lm/ft 100% ↧ | 0675LF |
| 875lm/ft 100% ↧ | 0875LF |

### K CIRCUIT / EM

| | |
|---|---|
| Single circuit<br>* leave blank | * |
| EMB EM battery pack<br>emergency battery pack only for 120/ 277V option (90 minute emergency operation) | EMB |

### L SHAPE / PATTERN

| | |
|---|---|
| Linear / straight | ST |

### M DIMENSIONS IN FT

| | |
|---|---|
| 2' fixture | 02FT |
| 4' fixture | 04FT |
| Custom length<br>Consult Factory | ###IN |

fixture replaces full length of ceiling panel slats; please see table on next page and fixture length dimensions

BASO

basolighting.com

## Technical data

| | SIZE TYPE | LEDCOLOR TEMPERATURE | INPUT WATTS | DELIVERED LMTOTAL | LIGHT DISTRIBUTION | DELIVERED LUMENDIRECT | OPTICAL EFFICIENCY | LUMINAIRE EFFICACY |
|---|---|---|---|---|---|---|---|---|
| **PANO 3.25"** | | | | | | | | |
| e LED | 2' opal | 40K | 8W | 900lm | 100% down | 900lm | 73% | 116lm/W |
| | 4' opal | | 15.9W | 1800lm | | 1800lm | | 116lm/W |
| e2LED | 2' opal | 40K | 12.3W | 1350lm | 100% down | 1350lm | 73% | 111 lm/W |
| | 4' opal | | 24.6W | 2700lm | | 2700lm | | 111 lm/W |
| e2² LED | 2' opal | 40K | 16.4W | 1750lm | 100% down | 1750lm | 73% | 108lm/W |
| | 4' opal | | 32.7W | 3500lm | | 3500lm | | 108lm/W |

for 27K, 30K or 35K multiply lm value by 0.96

## WoodWorks® Grille Tegular Ceiling Integration

(for more ceiling options, please see CEILING OPTIONS pages)

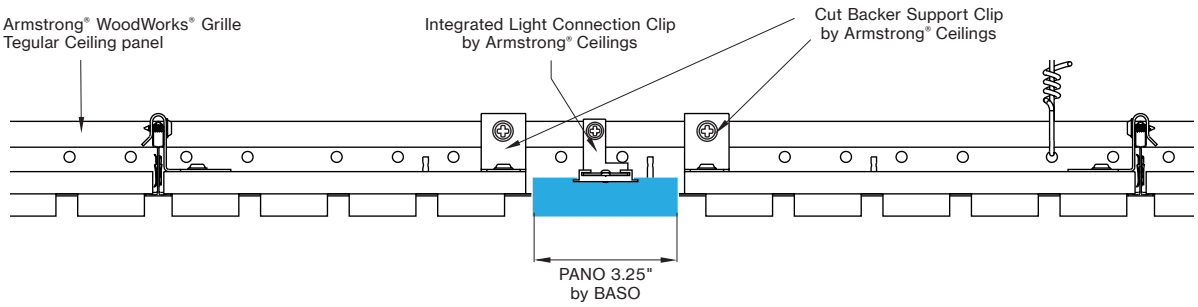


## Available lengths for ceiling types

| CEILING TYPE | 2FT | 4FT | 6FT | 8FT |
|---|---|---|---|---|
| WoodWorks® Grille Tegular 9/16 | 23.375" | 47.375" | n/a | n/a |
| WoodWorks® Grille Tegular 15/16 | 23" | 47" | n/a | n/a |
| WoodWorks® Grille Classic | 23" | 47" | 71" | 95" |
| WoodWorks® Grille Forte | *23" | 47" | 71" | 95" |
| WoodWorks® Linear Solid Wood panels | *23" | *47" | *71" | 95" |
| WoodWorks® Linear Veneered panels | *23" | *47" | *71" | 95.25" |

*Woodworks ceilings are not available in this length. Wood panels need to be cut in the field to fit this length.

### INTEGRATED LIGHT CONNECTION CLIP

Armstrong® Ceilings Integrated Light Connection Clip

visit armstrongceilings.com/linearlighting

please contact your Armstrong Ceilings rep

## WoodWorks® ceiling systems

BASO PANO is only approved for Armstrong® WoodWorks Grille Tegular 9/16, WoodWorks Grille Tegular 15/16, WoodWorks Grille, WoodWorks Linear Solid Wood panels and WoodWorks Linear Veneered panels ceiling systems.
Refer to armstrongceilings.com for installation instructions related to the ceiling products.

# PANO 3.25"

## WT9 - ARMSTRONG® WOODWORKS® GRILLE TEGULAR 9/16 PANELS

WT9 view from below




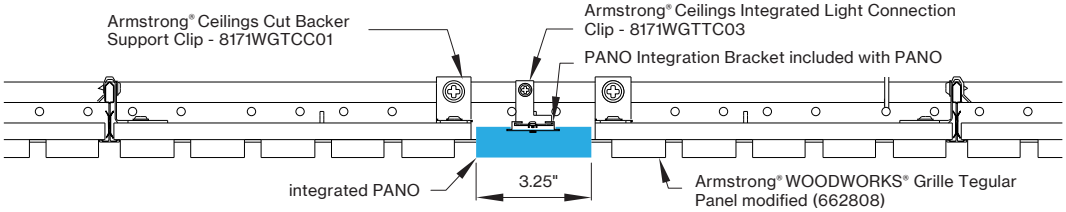


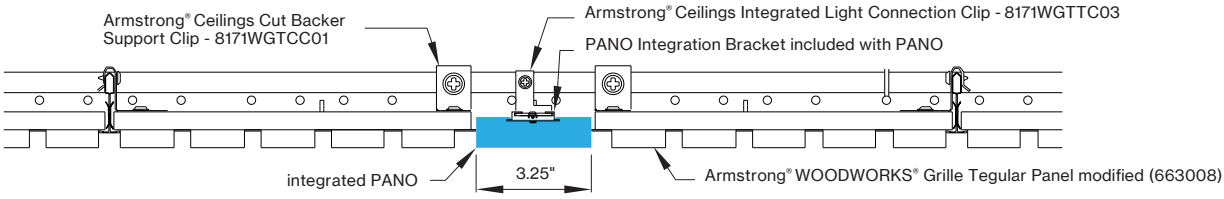


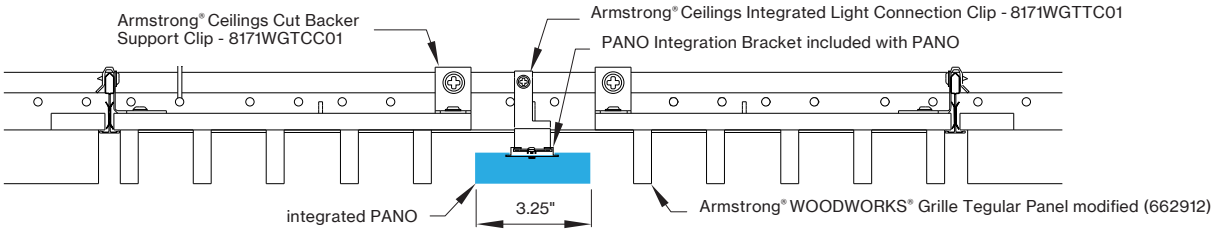

## PANO 3.25"

### WT5 - ARMSTRONG® WOODWORKS® GRILLE TEGULAR 15/16 PANELS

WT5 view from below




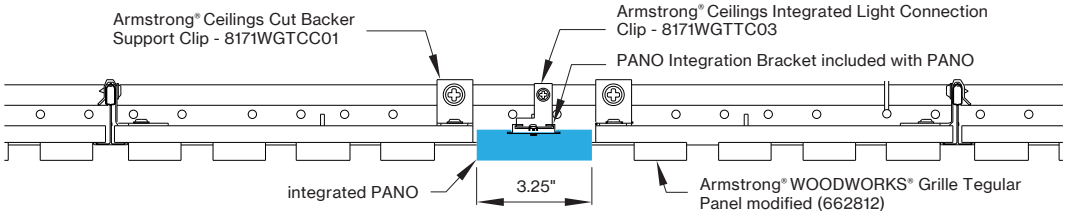


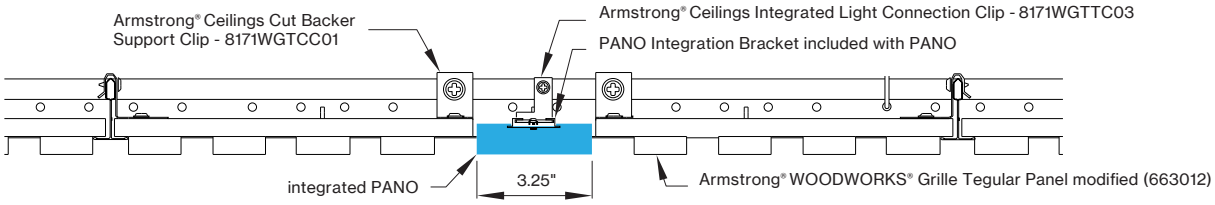


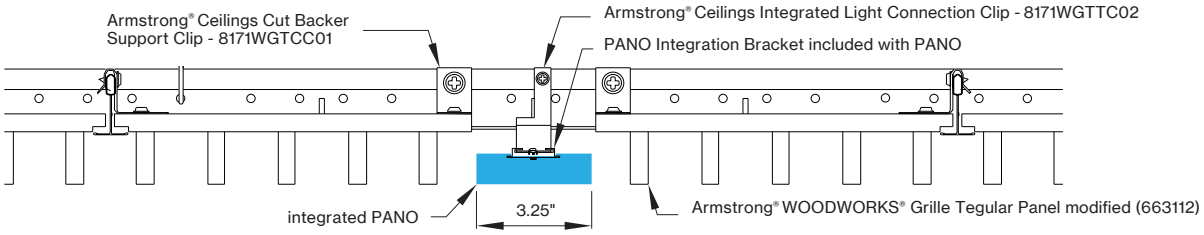


## PANO mounting instructions

Get access to the PANO mounting instructions faster by scanning the QR code.

https://www.basolighting.com/resources/mounting-instructions/pano