PANO 5.25"

WOODWORKS®

LINEAR SOLID & VENEERED WOOD PANELS

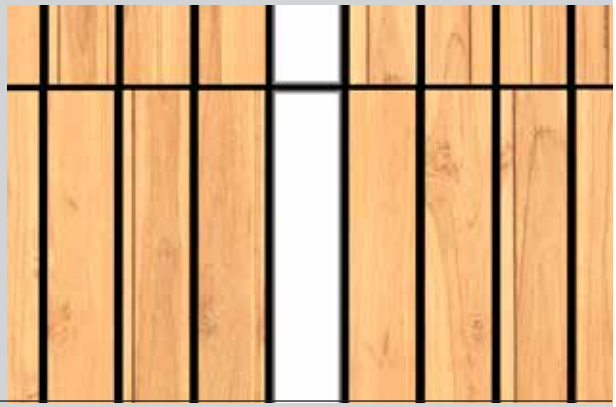

CERTIFICATIONS & COMPLIANCE

FEATURES

5 YEAR limited led warranty

Armstrong® COMPATIBLE

PERFORMANCE

- Coordinates with Woodworks® Linear & Veneered ceiling panel
- Up to 124lm/W
- High performance opal cover
- Remote mountable LED driver
- Damp rated



WoodWorks® Grille Ceiling Integration

Linear Solid Wood Panel



Linear Solid Wood Panel

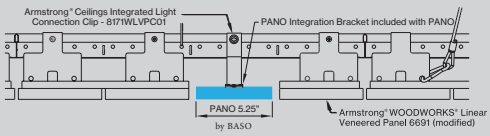

REMOTE MOUNTING

Quick and easy electrical connection

REMOTE MOUNTING

Catalog Number Example

PANO5-WLS-BL-PS-OP-27K-C80-UNV-010V-0550LF-ST-04FT

A B C D E F G H I J L M

A RANGE

PANO 5.25"	PANO5

B CEILING TYPE

WoodWorks® linear solid wood panels	WLS
WoodWorks® linear veneered panels	WLV

please contact your Armstrong® ceilings rep for the Integrated Light Connection Clip for the specified ceiling type

C COLOR

White	WH
Black	BL

D POWER FEED LENGTH

4' standard integrated	PS
10' medium remote option	PM
30' long remote option	PL

power feed distance denotes secondary wiring from detachable driver box to fixture; driver box comes with a 6ft conduit for primary wiring

E LENS

HP opal cover	OP

F CCT

2700K	27K
3000K	30K
3500K	35K
4000K	40K
Custom CCT	XXK

G CRI

CRI > 80	C80
CRI > 90	C90

H VOLTAGE

120V / 277V	UNV

I DIMMING

0-10V 1%	010V
Lutron EcoSystem Quantum, Vive, GRAFIK Eye, HomeWorks	LES1
Power over ethernet	POEC
consult customer service for compatibility	
Custom dimming	XXXX
consult customer service for compatibility	

J OUTPUT LM/FT

550lm/ft 100% ↧	0550LF
775lm/ft 100% ↧	0775LF
1000lm/ft 100% ↧	1000LF

K CIRCUIT / EM

Single circuit *	
* leave blank	
EMB EM battery pack	EMB

emergency battery pack only for 120/ 277V option
(90 minute emergency operation)

L SHAPE / PATTERN

Linear / straight	ST

M DIMENSIONS IN FT

4' fixture	04FT
6' fixture	06FT
8' fixture	08FT

fixture replaces full length of ceiling panel; please see table on next page and fixture length dimensions

BASO

basolighting.com

Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LUMEN DIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
PANO 5.25"								
e LED	8' opal	40 K	35.4 W	4400 lm	100 % down	4400 lm	81%	110 lm/W
e² LED	8' opal	40 K	50.5 W	6200 lm	100 % down	6200 lm	81%	106 lm/W
e²⁺ LED	8' opal	40 K	67.3 W	8000 lm	100 % down	8000 lm	81%	98 lm/W

for 27 K, 30 K or 35 K multiply lm value by 0.96

WoodWorks® Grille Ceiling System Integration

(for more ceiling options, please see CEILING OPTIONS pages)

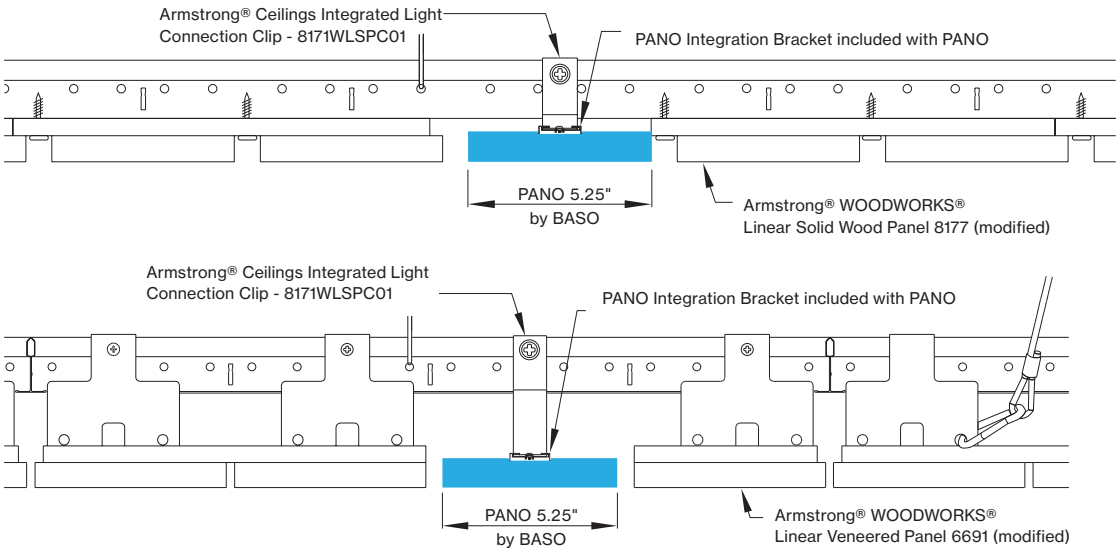

Available lengths for ceiling types

CEILING TYPE	2 FT	4 FT	6FT	8 FT
WoodWorks® Grille Tegular 9/16	23.375"	47.375"	n/a	n/a
WoodWorks® Grille Tegular 15/16	23"	47"	n/a	n/a
WoodWorks® Grille Classic	23"	47"	71"	95"
WoodWorks® Grille Forte	*23"	47"	71"	95"
WoodWorks® Linear Solid Wood panels	*23"	*47"	*71"	95"
WoodWorks® Linear Veneered panels	*23"	*47"	*71"	95.25"

*Woodworks ceilings are not available in this length. Wood panels need to be cut in the field to fit this length.

INTEGRATED LIGHT CONNECTION CLIP

Armstrong® Ceilings Integrated Light Connection Clip — visit armstrongceilings.com/linearlighting

please contact your Armstrong Ceilings rep

WoodWorks® ceiling systems

BASO PANO is only approved for Armstrong® WoodWorks Grille Tegular 9/16, WoodWorks Grille Tegular 15/16, WoodWorks Grille, WoodWorks Linear Solid Wood panels and WoodWorks Linear Veneered panels ceiling systems.
Refer to armstrongceilings.com for installation instructions related to the ceiling products.

WLS - ARMSTRONG® WOODWORKS® LINEAR SOLID WOOD PANELS

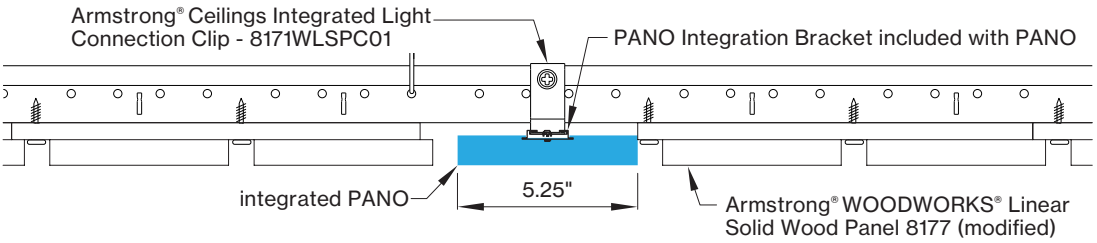

WLS view from below

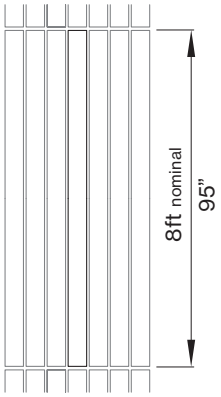

WLV - ARMSTRONG® WOODWORKS® LINEAR VENEERED PANELS

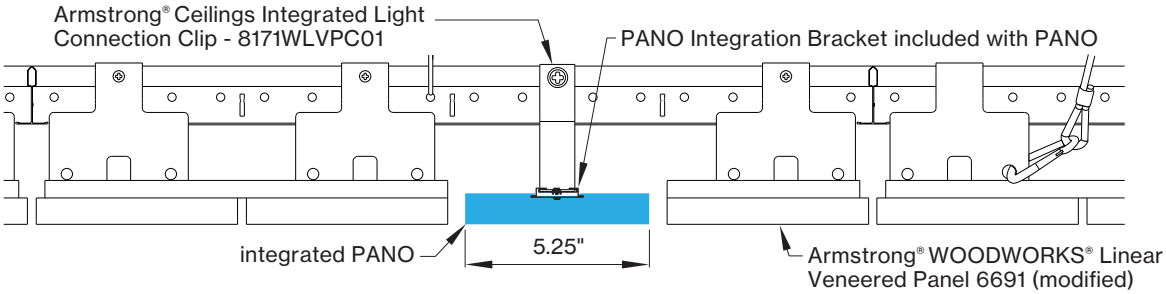

WLV view from below

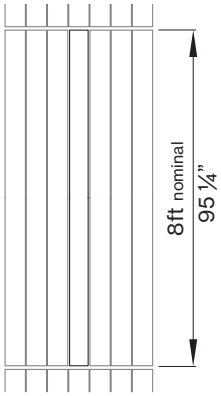

PANO mounting instructions

Get access to the PANO mounting instructions faster by scanning the QR code.

https://www.basolighting.com/resources/mounting-instructions/pano