



BASO 1.5 WALL WASH

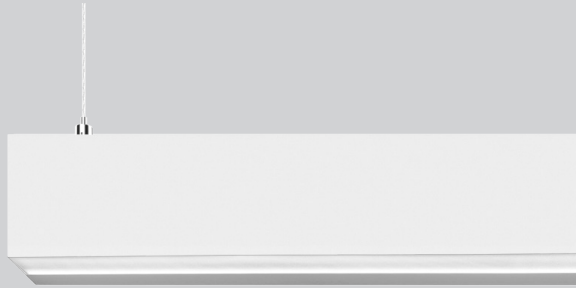


PERFORMANCE

- Up to 103lm/W efficiency
- 400 / 600 / 800lm/ft
- CRI > 80 & CRI > 90
- Damp rated



MOUNTING

Ceiling




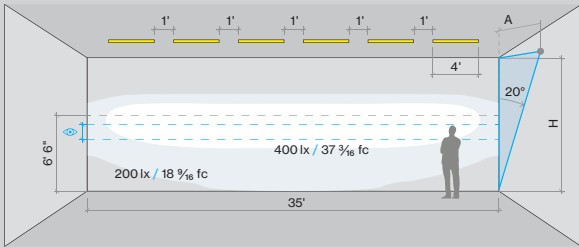
Suspended



BEAM DISTRIBUTION

Wall to ceiling ratio

Room height	H = 9 ft
Distance to wall	A = 3 ft
Reflection factor	0.7 0.5 0.2
Maintenance factor	0.8
Eye level 	4 - 5 ft



10 Business Days for all QuickShip items

- Maximum quantity: 400'
- "QuickShip" must be clearly listed on PO.
- QuickShip items must be on Separate Purchase Order.
- QuickShip orders must be received with complete and correct catalog numbers.
- Variant request will not qualify for QuickShip program.
- QuickShip orders must be received before 2 pm EST. After 2 pm, shipping will be based on the next business day.
- QuickShip orders are based on standard XAL terms for payment.
- Order change of any type will affect shipping times.
- Partial shipments may be required based on current factory inventory.



Declare.



5 YEAR
limited
led warranty




Catalog Number Example

BASO1.5-SUR-WH-WW-30K-C80-UNV-010V-0400LF-ST-72IN



A RANGE

 BASO 1.5 BASO 1.5

I OUTPUT LM/FT

 400lm/ft 100% \pm 0 4 0 0 L F
 600lm/ft 100% \pm 0 6 0 0 L F
 800lm/ft 100% \pm 0 8 0 0 L F

B MOUNTING

 Surface SUR
 Pendant PDT



J CIRCUIT / EM

 Single circuit *

C COLOR

 White WH
 Black BL

K SHAPE / PATTERN

 Linear / straight ST
 Linear / straight + flex inset SF
 includes 1ft. field-cutable section; only available for 4' and 8' segments





D LENS

 Asymmetric wall washer WW

E CCT

 3000K 3 0 K
 3500K 3 5 K

L DIMENSIONS IN INCH

 Linear 4' 48 I N
 Linear 6' 72 I N
 Linear 8' 96 I N
 Custom length XXFT
 (QS in 2' increments only)

F CRI

 CRI > 80 C 8 0
 CRI > 90 C 9 0

G VOLTAGE

 120V / 277V UNV

H DIMMING

 0-10V 1% 0 1 0 V

BASO
basolighting.com
xalusa.com


Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
BASO DIRECT									
e LED	4' linear	30 K, 35 K	16 W	1600 lm	100 % down	400lm/ft	-	67 %	103lm/W
	6' linear		24 W	2400 lm					
	8' linear		32 W	3200 lm					
e ² LED	4' linear	30 K, 35 K	24 W	2400 lm	100 % down	600lm/ft	-	67 %	99lm/W
	6' linear		32 W	3200 lm					
	8' linear		48 W	4800 lm					
e ²⁺ LED	4' linear	30 K, 35 K	36 W	3200 lm	100 % down	800lm/ft	-	67 %	93lm/W
	6' linear		48 W	4000 lm					
	8' linear		72 W	6400 lm					

Patterns top view

LINEAR



A	FIXTURES	CODE
48"	1'× 4' linear	ST - 0 4 FT
96"	1'× 8' linear	ST - 0 8 FT
144"	8' + 4' linear	ST - 1 2 FT





DIMENSIONS

BASO 1.5 WALL WASHER

CEILING direct

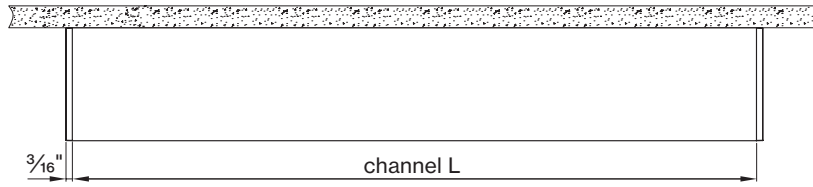

PENDANT direct

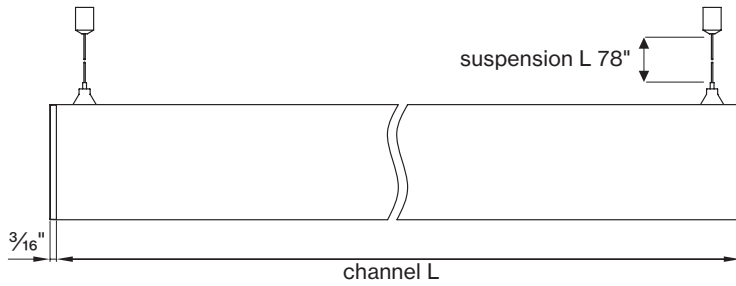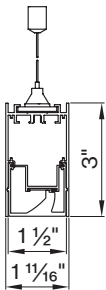

BASO mounting instructions

Get access to the BASO 1.5 WW mounting instructions faster by scanning the QR code.

www.xalusa.com/resources/mounting-instructions/baso

