





Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
BASO DIRECT									
	e LED	35K	4' linear	16.4W	100% down	400lm/ft	-	67%	98lm/W
	6' linear		24.6W	2415lm					
	8' linear		32.8W	3220lm					
	e ² LED	35K	4' linear	23.5W	100% down	550lm/ft	-	67%	94lm/W
	6' linear		35.3W	3300lm					
	8' linear		47W	4410lm					

Patterns top view

LINEAR



A	FIXTURES	CODE
48"	1 × 4' linear	ST - 0 4 FT
96"	1 × 8' linear	ST - 0 8 FT
144"	8' + 4' linear	ST - 1 2 FT



DIMENSIONS

BASO 1.5




SURFACE
direct

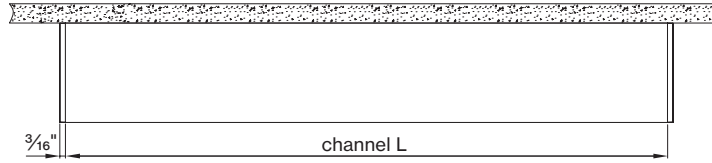

PENDANT

direct

direct / indirect

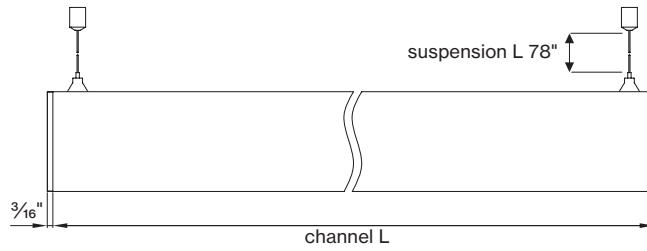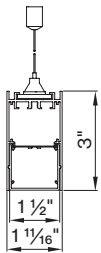

Declare.



BASO mounting instructions

Get access to the BASO 1.5 mounting instructions faster by scanning the QR code.

www.xalusa.com/resources/mounting-instructions/baso

