




LENO 4.0

24" GRID

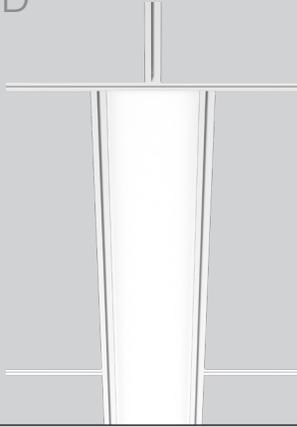

CERTIFICATIONS & COMPLIANCE




FEATURES



PERFORMANCE

- 120V / 277V Universal
- Up to 138lm/W
- CRI > 80 & CRI > 90
- Zero plenum lights
- Damp & Dry Rated



9/16" GRID

ARMSTRONG® SILHOUETTE®



ARMSTRONG® SUPRAFINE®



ARMSTRONG® INTERLUDE®



10 Business Days for all QuickShip items

- Maximum quantity: 400'
- "QuickShip" must be clearly listed on PO.
- QuickShip items must be on Separate Purchase Order.
- QuickShip orders must be received with complete and correct catalog numbers.
- Variant request will not qualify for QuickShip program.
- QuickShip orders must be received before 2 pm EST. After 2 pm, shipping will be based on the next business day.
- QuickShip orders are based on standard XAL terms for payment.
- Order change of any type will affect shipping times.
- Partial shipments may be required based on current factory inventory.

Catalog Number Example

LENO-WP-OP-30K-C80-UNV-010V-0475LF-ST-4FT

A RANGE

QS LENO 4.0 L E N O

B CEILING SYSTEM

QS Armstrong 9/16" Grid *
*compatible with Armstrong 9/16" grid only

C WHIP / THROUGH-WIRE

QS Whip 6' W P

D LENS

QS HP opal cover O P

E CCT

QS 3000K 3 0 K
QS 3500K 3 5 K

F CRI

QS CRI > 80 C 8 0
QS CRI > 90 C 9 0

G VOLTAGE

QS 120V / 277V U N V

H DIMMING

QS 0-10V 1% 0 1 0 V

I OUTPUT LM/FT DIRECT

QS 475 lm/ft 0 4 7 5 L F
QS 695 lm/ft 0 6 9 5 L F
QS 905 lm/ft 0 9 0 5 L F

J CIRCUIT / EM

QS Single circuit *

K SHAPE / PATTERN

QS Linear / straight S T

L DIMENSIONS IN FT

QS 4' fixture 4 F T
QS 8' fixture 8 F T
QS Custom length X X F T
(QS in 4' increments only)

Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LUMEN DIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
LENO 4.0 24" GRID whip								
	4' opal	35K	15 W	1940 lm		1940 lm		138 lm/W
	8' opal		29 W	3880 lm		3880 lm		138 lm/W
	4' opal	35K	22 W	2840 lm		2840 lm		134 lm/W
	8' opal		44 W	5680 lm		5680 lm		134 lm/W
	4' opal	35K	30 W	3700 lm		3700 lm		130 lm/W
	8' opal		59 W	7400 lm		7400 lm		130 lm/W

for 30K or 35K multiply lm value by 0.96


Accessories

LENO RELEASE TOOL CODE
LENO releasing tool for Armstrong grid ceilings LENO R00700

HURRICANE BRACKET CODE
For ceiling requiring two separate mounting points LENO H00000

ARMSTRONG CONNECTOR BRACKET CODE
Armstrong lighting connector bracket (LCB4) visit armstrong.com
please contact your Armstrong rep

WHIP FIXTURE



Dimensions

LENO 4.0 24" GRID / 4.0 30" GRID



Armstrong® Silhouette®
XL 1/16" bolt slot grid



Armstrong® Suprafine®
XL 1/16" flat T-grid



Armstrong®
Interlude® XL HRC

Grid ceiling

XAL LENO is only approved for Armstrong® 1/16" Suprafine®, Silhouette®, Interlude®, AXIOM® cove, drywall and TechZone® ceiling systems.


Armstrong® lighting connector brackets make installation quick and easy with no independent suspension required. The brackets must be installed at every LENO location along the ACT ceiling (see drawings in the technical data section).

Approved for seismic D, E, F installations.




DIMENSIONS


Four installation types




on-center



offset




middle







4" TechZone

ARMSTRONG® Ceilings Integration

ACT ceiling

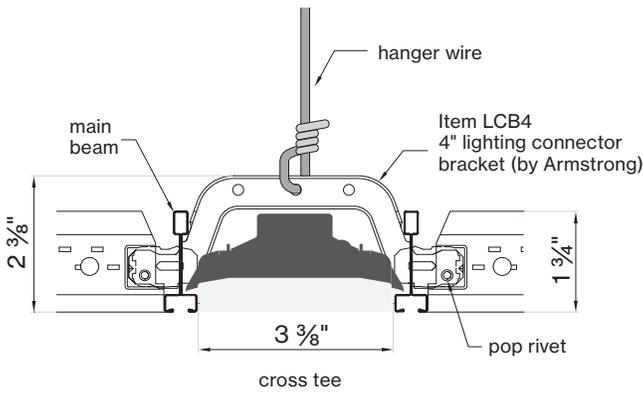

Lighting connector bracket position

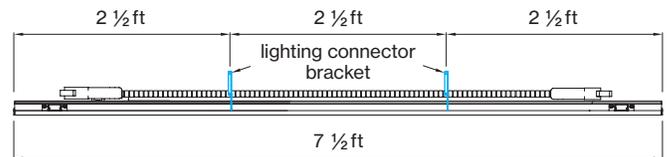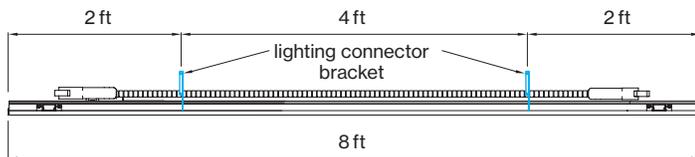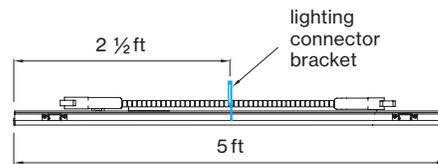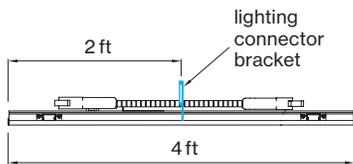

LENO mounting instructions

Get access to LENO mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/leno>

