





M-LINE DIRECT

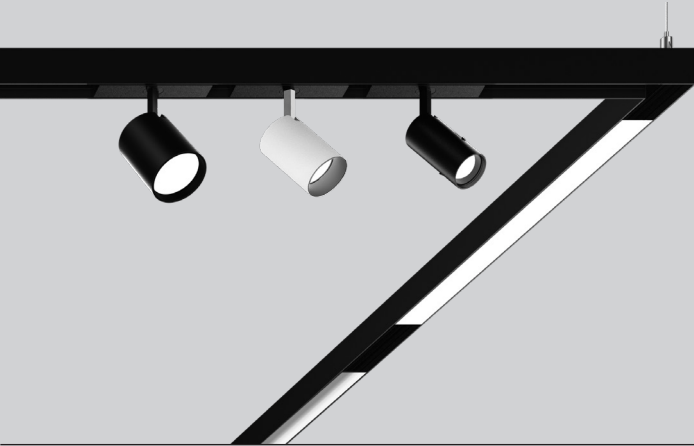

PERFORMANCE

- 48V low voltage track
- Multiple inset options available
- CRI > 90+
- Flexible magnetic profile system




MOUNTING


Ceiling



Pendant



MAGNETIC ATTACHMENT

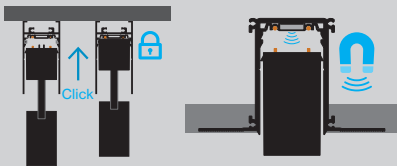

10 Business Days for all QuickShip items

- Maximum quantity: 400'
- "QuickShip" must be clearly listed on PO.
- QuickShip items must be on Separate Purchase Order.
- QuickShip orders must be received with complete and correct catalog numbers.
- Variant request will not qualify for QuickShip program.
- QuickShip orders must be received before 2 pm EST. After 2 pm, shipping will be based on the next business day.
- QuickShip orders are based on standard BASO terms for payment.
- Order change of any type will affect shipping times.
- Partial shipments may be required based on current factory inventory.



5 YEAR
limited
led warranty

Catalog Number Example

MLINS1.1-SUR-BL-48V-010V-ST-04FT

A RANGE

QS M-LINE 1.1	MLINS1.1
QS M-LINE 1.2	MLINS1.2

E DIMMING

QS 0-10V 1% single control	010V
----------------------------	------

B MOUNTING

QS Surface mount	SUR
QS Pendant	PDT

pendant suspension set includes cable suspension and one white J-box cover

F SHAPE / PATTERN

QS Linear	ST
-----------	----

G DIMENSIONS IN FEET

QS Linear 4'	04FT
QS Linear 8'	08FT
QS Custom length	XXFT

(QS in 2' increments only)

C COLOR outside / inside

QS Black	BL
----------	----

D VOLTAGE

QS 48V	48V
--------	-----

constant voltage track



BASO
basolighting.com
xalusa.com



M-LINE 1.1 channel dimensions

CEILING


PENDANT



Possible shapes top view


please provide RCP to ensure correct shape orientation

LINEAR




Power feeder locations

POWER FEED

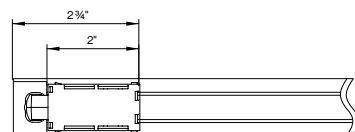

LINEAR POWER COUPLER

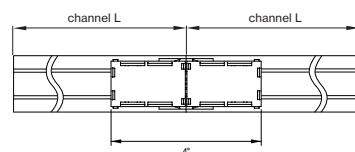

M-LINE Mounting Instructions

Get access to the M-LINE mounting instructions faster by scanning the QR code.

<https://www.xalusa.com/resources/mounting-instructions/m-line>

