



PANO 5.25"

WOODWORKS® GRILLE FORTÉ

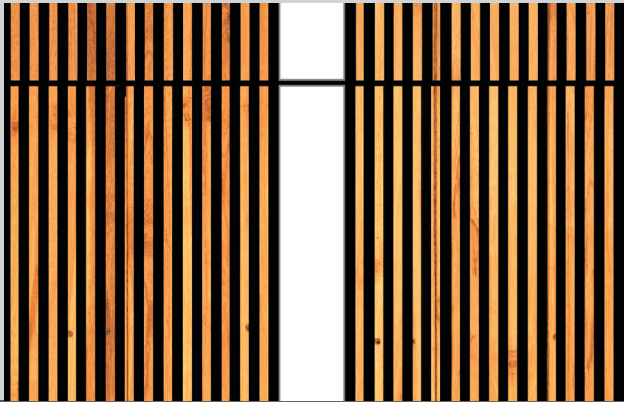


PERFORMANCE

- Coordinates with Woodworks® Grille ceiling panel
- Up to 124lm/W
- High performance opal cover
- Remote mountable LED driver
- Damp rated



WoodWorks® Grille Tegular Ceiling Integration

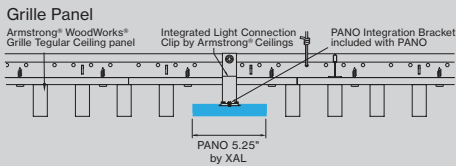

INTEGRATED DRIVER / REMOTE MOUNTING

Quick and easy electrical connection

REMOTE MOUNTING



[link to page](#)


ARMSTRONG CEILING TYPES

WARM, AESTHETIC ROOMS

WT5 - WOODWORKS®
GRILLE TEGULAR 1 5/16"




WT5 - WOODWORKS®
GRILLE TEGULAR-VERTICAL SLATS



WLS - WOODWORKS®
GRILLE SOLID WOOD PANELS



WLV - WOODWORKS® GRILLE
VENEERED PANELS



5 YEAR
limited
led warranty

Catalog Number Example

PANO5-WWG-WH-PM-OP-27K-C80-UNV-DALI-0550LF-ST-08FT

A RANGE

PANO 5.25" PANO5

H VOLTAGE

120V / 277V UNV

B CEILING TYPE

WoodWorks® Grille WWG

please contact your Armstrong® ceilings rep for the Integrated Light Connection Clip for the specified ceiling type

I DIMMING

0-10V 1% 0 1 0 V

J OUTPUT LM/FT

775lm/ft 100% ↓ 0 7 7 5 L F

C COLOR

Black B L

D POWER FEED LENGTH

4' standard integrated P S

E LENS

HP opal cover O P

F CCT

3000K 3 0 K
3500K 3 5 K

G CRI

CRI > 80 C 8 0
CRI > 90 C 9 0

K DIMENSIONS IN FT

4' fixture 0 4 F T
6' fixture 0 6 F T
8' fixture 0 8 F T

fixture replaces full length of ceiling panel; please see table on next page and fixture length dimensions

BASO
basolighting.com
xalusa.com


Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LUMEN DIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
PANO 5.25"								
e LED	8' opal	40 K	35.4 W	4400lm	100% down	4400lm	81%	110lm/W
e ² LED	8' opal	40 K	50.5 W	6200lm	100% down	6200lm	81%	106lm/W
e ²⁺ LED	8' opal	40 K	67.3 W	8000lm	100% down	8000lm	81%	98lm/W

for 27 K, 30 K or 35 K multiply lm value by 0.96

WoodWorks® Grille Tegular Ceiling Integration

(for more ceiling options, please see CEILING OPTIONS pages)

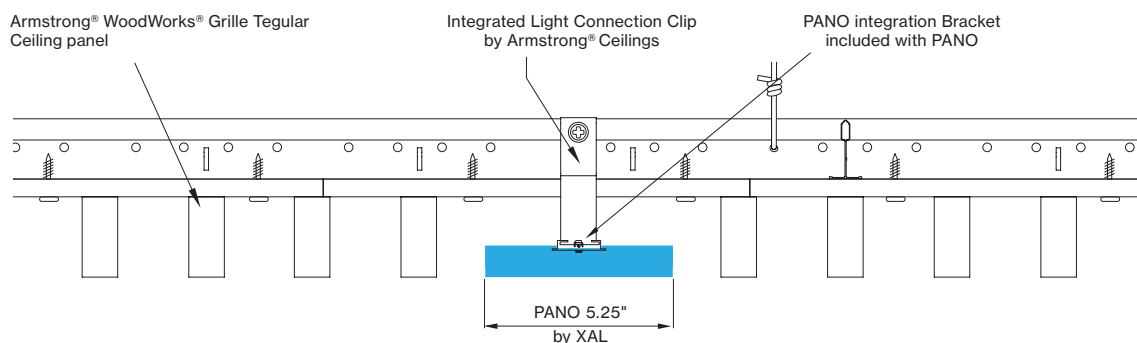

Available lengths for ceiling types

CEILING TYPE	2 FT	4 FT	6 FT	8 FT
WoodWorks® Grille Tegular ⁹ / ₁₆	23.375"	47.375"	n/a	n/a
WoodWorks® Grille Tegular ¹⁵ / ₁₆	23"	47"	n/a	n/a
WoodWorks® Grille Classic	23"	47"	71"	95"
WoodWorks® Grille Forte	*23"	47"	71"	95"
WoodWorks® Linear Solid Wood panels	*23"	*47"	*71"	95"
WoodWorks® Linear Veneered panels	*23"	*47"	*71"	95.25"

*Woodworks ceilings are not available in this length. Wood panels need to be cut in the field to fit this length.

INTEGRATED LIGHT CONNECTION CLIP

Armstrong® Ceilings Integrated Light Connection Clip

visit armstrongceilings.com/linearlighting

please contact your Armstrong Ceilings rep






WoodWorks® ceiling systems

XAL PANO is only approved for Armstrong® WoodWorks Grille Tegular 9/16, WoodWorks Grille Tegular 15/16, WoodWorks Grille, WoodWorks Linear Solid Wood panels and WoodWorks Linear Veneered panels ceiling systems. Refer to armstrongceilings.com for installation instructions related to the ceiling products.




DIMENSIONS

WWG - ARMSTRONG® WOODWORKS® GRILLE PANELS

WWG view from below

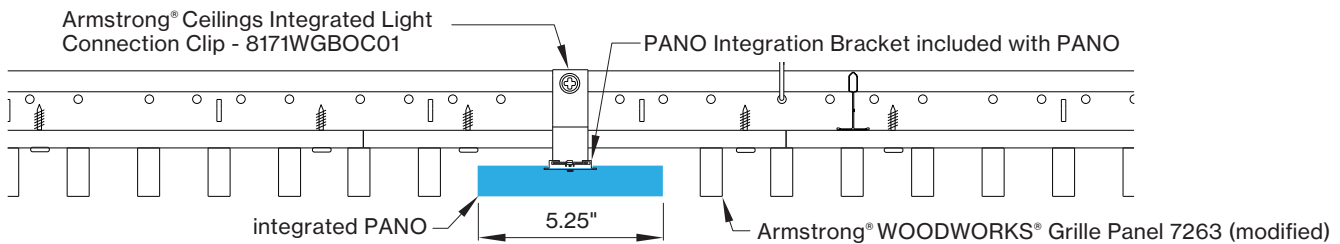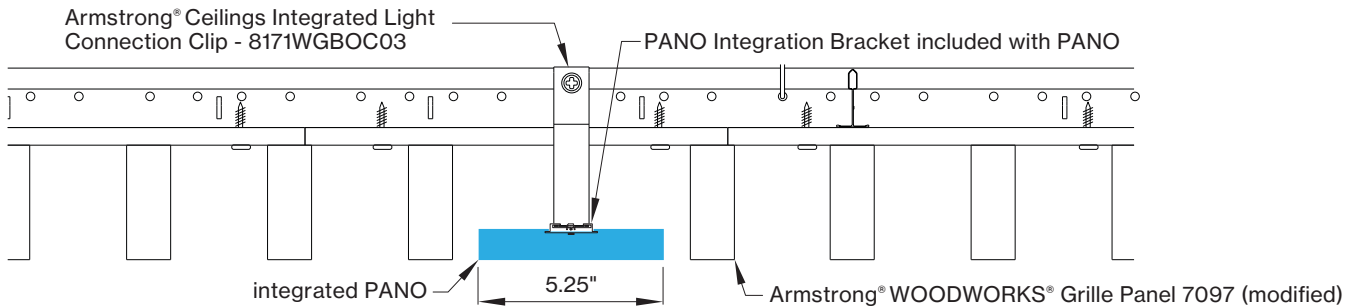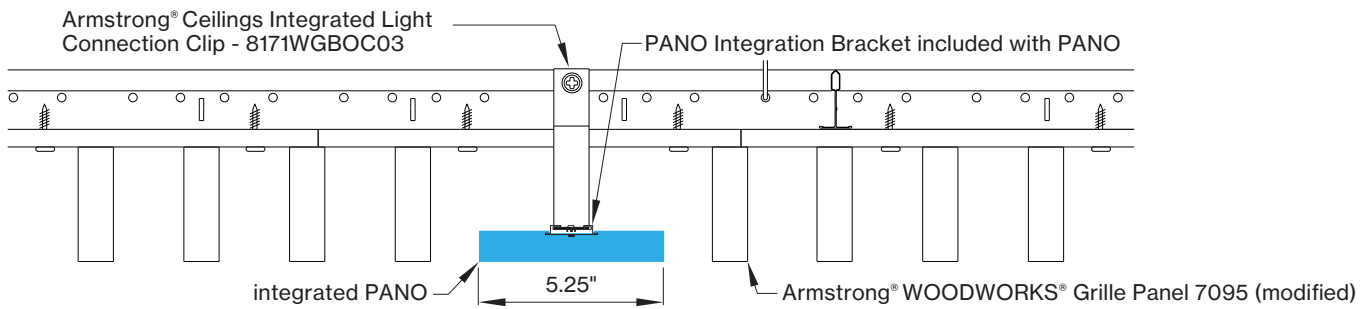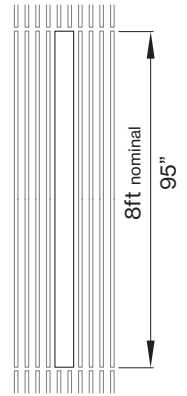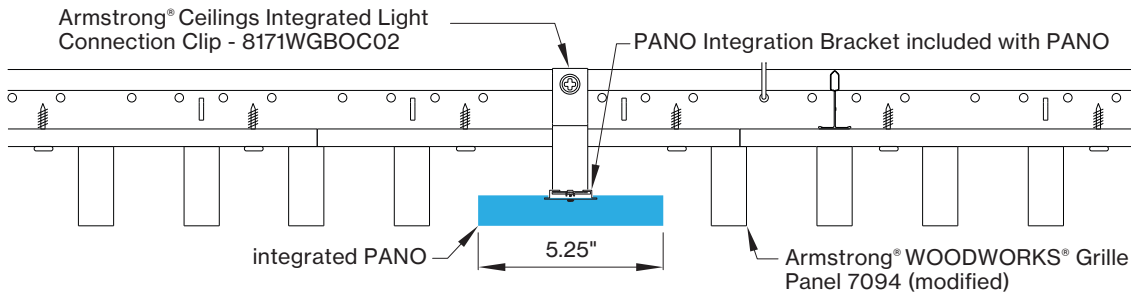

WWG - ARMSTRONG® WOODWORKS® GRILLE PANELS cont'd

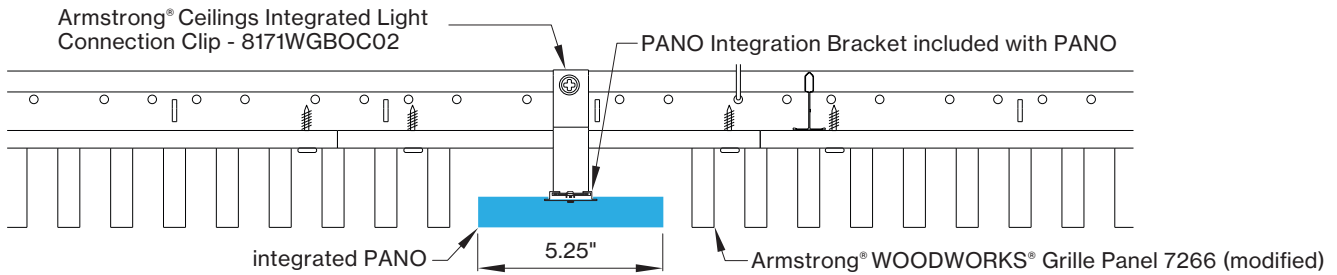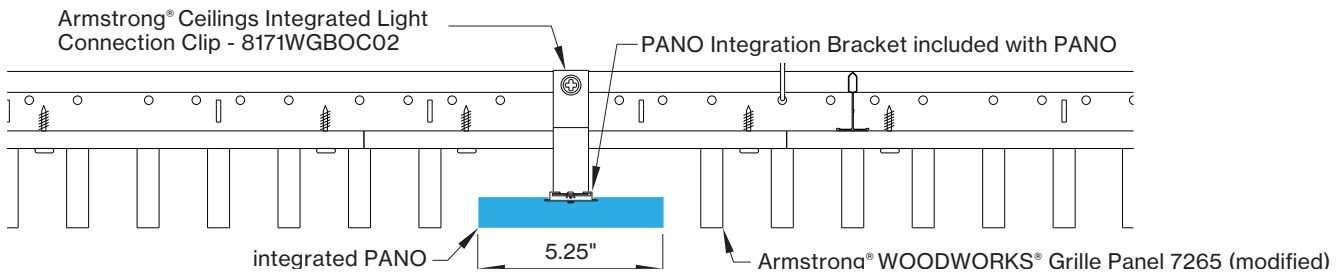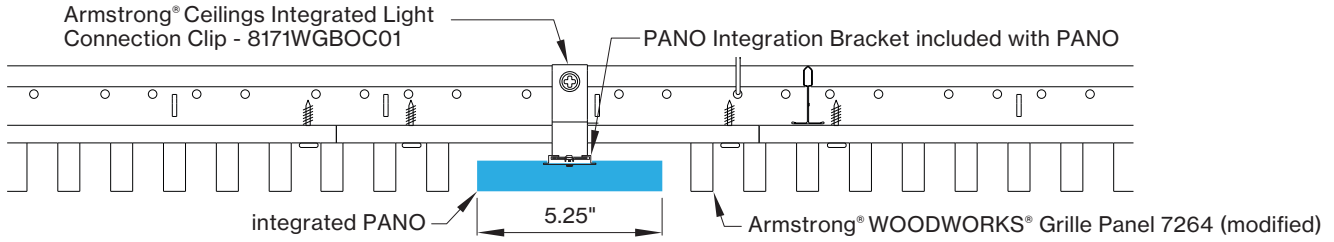

PANO mounting instructions

Get access to the PANO mounting instructions faster by scanning the QR code.

<https://www.xalusa.com/resources/cut-sheets/pano>

