




PANO 2"

WOODWORKS®

GRILLE TEGULAR $\frac{9}{16}$ & $\frac{15}{16}$ INTEGRATION

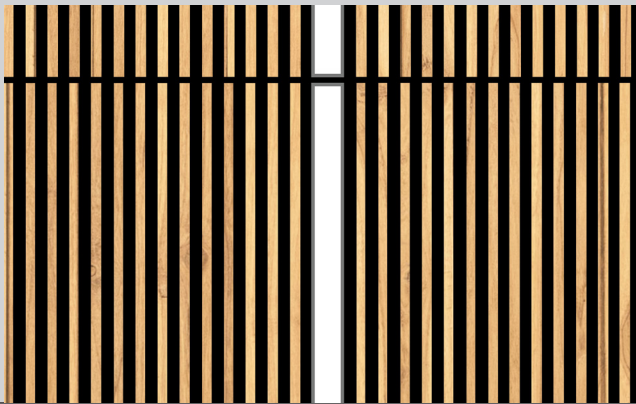

CERTIFICATIONS & COMPLIANCE




FEATURES

5 YEAR
limited
led warranty




PERFORMANCE

- Coordinates with Woodworks® Grille Tegular & integration ceiling panel
- Up to 109lm/W
- High performance opal cover
- Remote mountable LED driver
- Damp rated



WoodWorks® Grille Tegular Ceiling Integration

Grille Tegular Panel

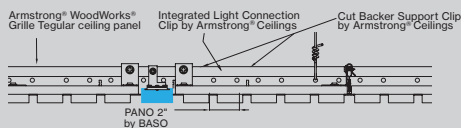

REMOTE MOUNTING

Quick and easy electrical connection

REMOTE MOUNTING



Catalog Number Example

PANO2-WT9-WH-PS-OP-30K-C80-UNV-010V-0275LF-ST-02FT



A RANGE

PANO 2" PANO 2

H VOLTAGE

120V / 277V UNV

B CEILING TYPE

WoodWorks® Grille Tegular $\frac{9}{16}$ WT 9

WoodWorks® Grille Tegular $\frac{15}{16}$ WT 5

please contact your Armstrong® ceilings rep for the Integrated Light Connection Clip for the specified ceiling type

I DIMMING

0-10V 1% 0 1 0 V

J OUTPUT LM/FT

425lm/ft 100% ± 0 4 2 5 L F

K SHAPE / PATTERN

Linear / straight S T

C COLOR

Black B L

D POWER FEED LENGTH

4' standard integrated P S

E LENS

HP opal cover O P

F CCT

3000K 3 0 K

3500K 3 5 K

G CRI

CRI > 80 C 8 0

CRI > 90 C 9 0

L DIMENSIONS IN FT

2' fixture 0 2 F T

4' fixture 0 4 F T

fixture replaces full length of ceiling panel slats; please see table on next page and fixture length dimensions


Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LUMEN DIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
PANO 2" e LED	2' opal	40 K	4.8 W	550 lm	100 % down	550 lm	70%	108 lm/W
	4' opal		9.6 W	1100 lm		1100 lm		109 lm/W
e ² LED	2' opal	40 K	7.4 W	850 lm	100 % down	850 lm	70%	115 lm/W
	4' opal		14.9 W	1700 lm		1700 lm		115 lm/W
e ²⁺ LED	2' opal	40 K	11.3 W	1200 lm	100 % down	1200 lm	70%	108 lm/W
	4' opal		22.7 W	2400 lm		2400 lm		108 lm/W

for 27 K, 30 K or 35 K multiply lm value by 0.96

WoodWorks® Grille Tegular Ceiling Integration

(for more ceiling options, please see CEILING OPTIONS pages)

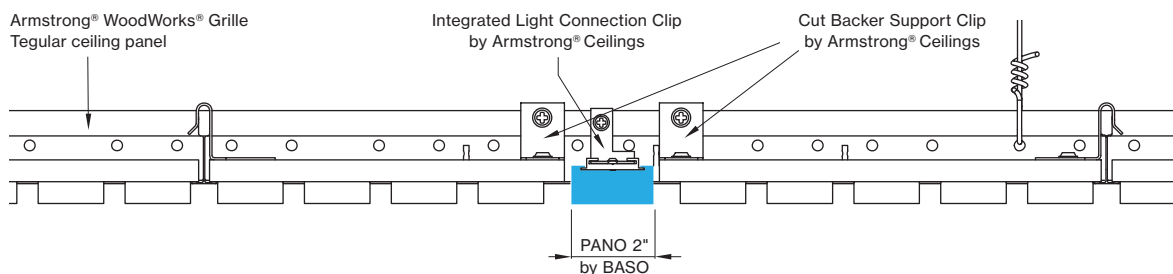

Available lengths for ceiling types

CEILING TYPE	2 FT	4 FT	6 FT	8 FT
WoodWorks® Grille Tegular 9/16	23.375"	47.375"	n/a	n/a
WoodWorks® Grille Tegular 15/16	23"	47"	n/a	n/a
WoodWorks® Grille Classic	23"	47"	71"	95"
WoodWorks® Grille Forte	*23"	47"	71"	95"
WoodWorks® Linear Solid Wood panels	*23"	*47"	*71"	95"
WoodWorks® Linear Veneered panels	*23"	*47"	*71"	95.25"

*Woodworks ceilings are not available in this length. Wood panels need to be cut in the field to fit this length.

INTEGRATED LIGHT CONNECTION CLIP

Armstrong® Ceilings Integrated Light
Connection Clip

visit
[armstrongceilings.com](https://armstrongceilings.com/linearlighting)
[/linearlighting](https://armstrongceilings.com/linearlighting)


please contact your Armstrong Ceilings rep

WoodWorks® ceiling systems



BASO PANO is only approved for Armstrong® WoodWorks Grille Tegular 9/16, WoodWorks Grille Tegular 15/16, WoodWorks Grille, WoodWorks Linear Solid Wood panels and WoodWorks Linear Veneered panels ceiling systems. Refer to armstrongceilings.com for installation instructions related to the ceiling products.

DIMENSIONS




PANO 2"

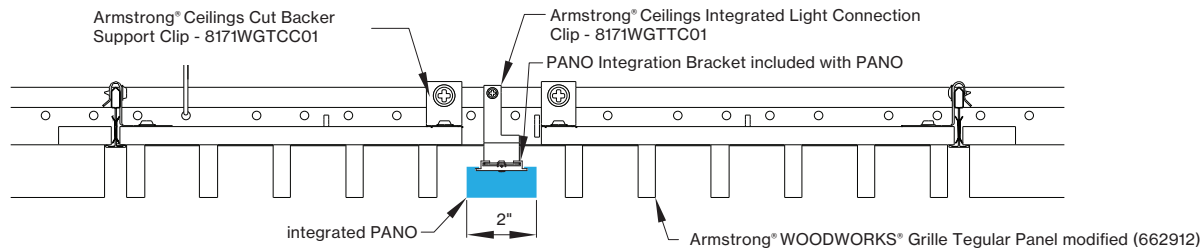WT9 - ARMSTRONG® WOODWORKS® GRILLE TEGULAR $\frac{9}{16}$ PANELS

WT9 view from below

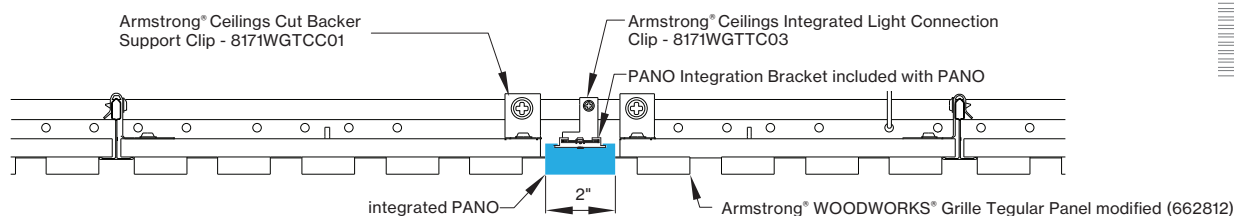WT5 - ARMSTRONG® WOODWORKS® GRILLE TEGULAR $\frac{15}{16}$ PANELS

WT5 view from below

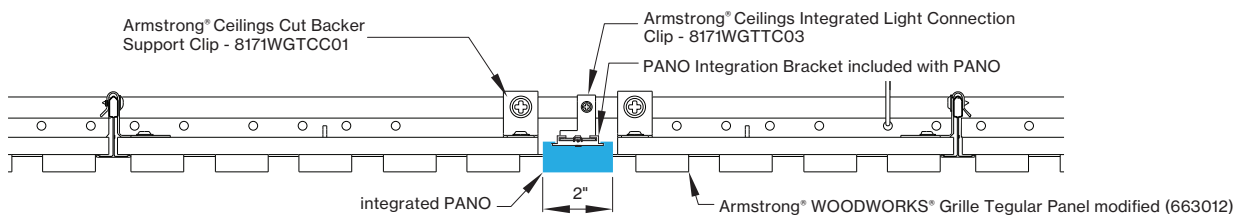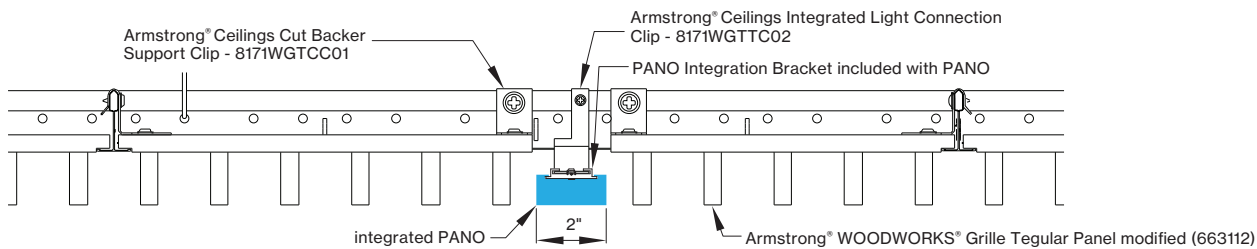

PANO mounting instructions

Get access to the PANO mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/pano>

