



PANO 5.25"

WOODWORKS®

LINEAR SOLID & VENEERED WOOD PANELS



CERTIFICATIONS & COMPLIANCE




FEATURES




PERFORMANCE

- Coordinates with Woodworks® Linear & Veneered ceiling panel
- Up to 124lm/W
- High performance opal cover
- Remote mountable LED driver
- Damp rated




WoodWorks® Grille Ceiling Integration

Linear Solid Wood Panel

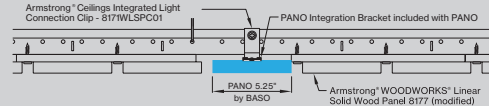

Linear Solid Wood Panel

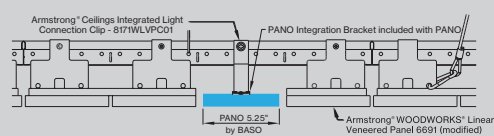

REMOTE MOUNTING

Quick and easy electrical connection

REMOTE MOUNTING



Catalog Number Example

PANO5-WLS-BL-PS-OP-30K-C80-UNV-010V-0775LF-ST-04FT



A RANGE

PANO 5.25" PANO5

H VOLTAGE

120V / 277V UNV

B CEILING TYPE

WoodWorks® linear WLS
solid wood panels

WoodWorks® linear WLV
veneered panels

please contact your Armstrong® ceilings rep for the Integrated Light Connection Clip for the specified ceiling type

I DIMMING

0-10V 1% 010V

J OUTPUT LM/FT

775 lm/ft 100% 0775LF

K SHAPE / PATTERN

Linear / straight ST

C COLOR

Black BL

D POWER FEED LENGTH

4' standard integrated PS

E LENS

HP opal cover OP

F CCT

3000K 30K

3500K 35K

G CRI

CRI > 80 C80

CRI > 90 C90

L DIMENSIONS IN FT

4' fixture 04FT

6' fixture 06FT

8' fixture 08FT

fixture replaces full length of ceiling panel; please see table on next page and fixture length dimensions




Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LUMEN DIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
PANO 5.25"								
e LED	8' opal	40 K	35.4 W	4400 lm	100 % down	4400 lm	81%	110 lm/W
e ² LED	8' opal	40 K	50.5 W	6200 lm	100 % down	6200 lm	81%	106 lm/W
e ²⁺ LED	8' opal	40 K	67.3 W	8000 lm	100 % down	8000 lm	81%	98 lm/W

for 27 K, 30 K or 35 K multiply lm value by 0.96

WoodWorks® Grille Ceiling System Integration

(for more ceiling options, please see CEILING OPTIONS pages)

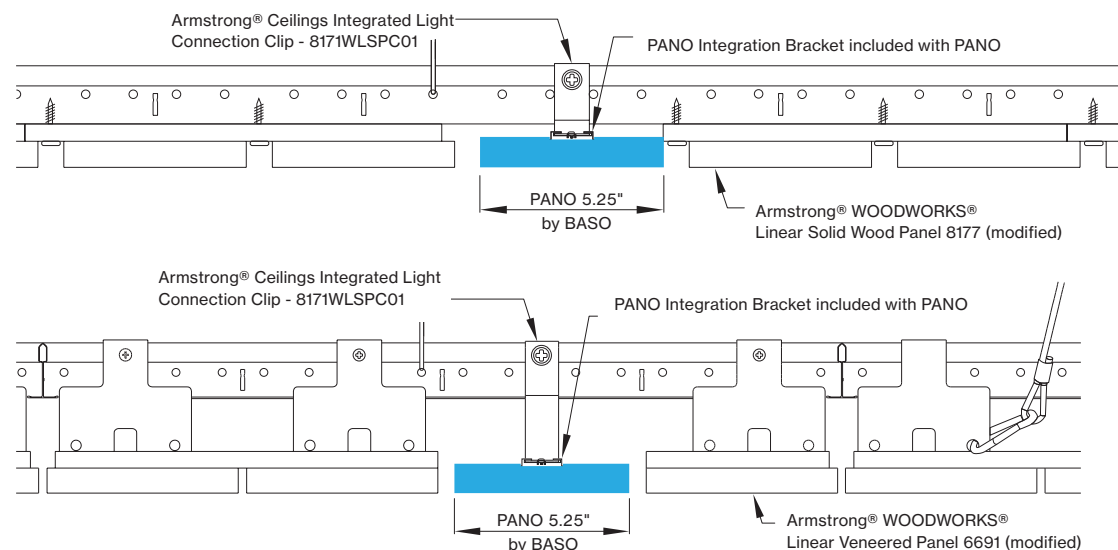

Available lengths for ceiling types

CEILING TYPE	2 FT	4 FT	6 FT	8 FT
WoodWorks® Grille Tegular $\frac{9}{16}$	23.375"	47.375"	n/a	n/a
WoodWorks® Grille Tegular $\frac{15}{16}$	23"	47"	n/a	n/a
WoodWorks® Grille Classic	23"	47"	71"	95"
WoodWorks® Grille Forte	*23"	47"	71"	95"
WoodWorks® Linear Solid Wood panels	*23"	*47"	*71"	95"
WoodWorks® Linear Veneered panels	*23"	*47"	*71"	95.25"

*Woodworks ceilings are not available in this length. Wood panels need to be cut in the field to fit this length.

INTEGRATED LIGHT CONNECTION CLIP

Armstrong® Ceilings Integrated Light
Connection Clip

please contact your Armstrong Ceilings rep


visit
[armstrongceilings.com](http://armstrongceilings.com/linearlighting)
[/linearlighting](http://armstrongceilings.com/linearlighting)

WoodWorks® ceiling systems

BASO PANO is only approved for Armstrong® WoodWorks Grille Tegular 9/16, WoodWorks Grille Tegular 15/16, WoodWorks Grille, WoodWorks Linear Solid Wood panels and WoodWorks Linear Veneered panels ceiling systems. Refer to armstrongceilings.com for installation instructions related to the ceiling products.

DIMENSIONS


WLS - ARMSTRONG® WOODWORKS® LINEAR SOLID WOOD PANELS

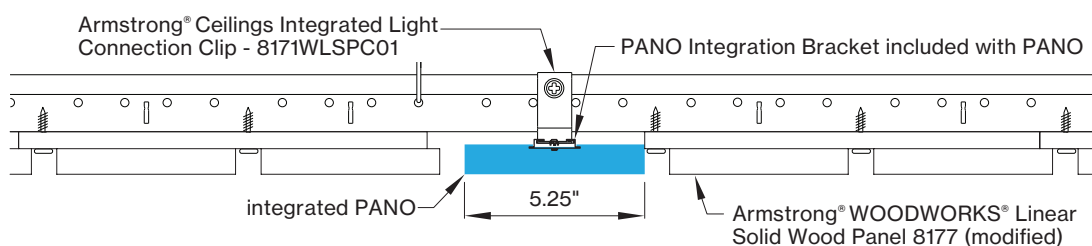

WLS view from below



WLV - ARMSTRONG® WOODWORKS® LINEAR VENEERED PANELS

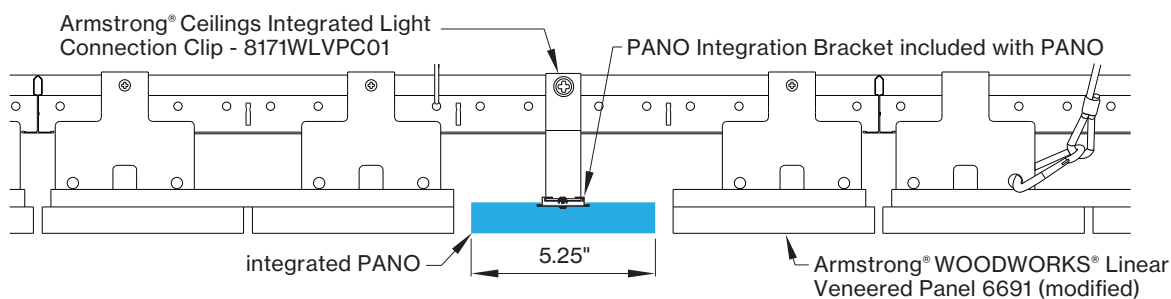

WLV view from below



PANO mounting instructions

Get access to the PANO mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/pano>

