



ROUND DIRECT



CERTIFICATIONS & COMPLIANCE



FEATURES


5 YEAR
limited
led warranty



POE
Power over Ethernet


PERFORMANCE

- Up to 123 lm/W efficiency
- 27 K, 30 K, 35 K, 40 K
- CRI > 80 & CRI > 90



ONE CLICK INSTALLATION

Mounting & electrical connection with one click

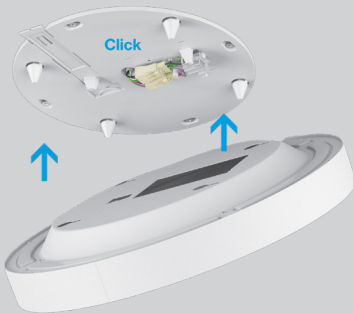

10 Business Days for all QuickShip items

- Maximum quantity: 25 pieces
- "QuickShip" must be clearly listed on PO.
- QuickShip items must be on Separate Purchase Order.
- QuickShip orders must be received with complete and correct catalog numbers.
- Variant request will not qualify for QuickShip program.
- QuickShip orders must be received before 2 pm EST. After 2 pm, shipping will be based on the next business day.
- QuickShip orders are based on standard XAL terms for payment.
- Order change of any type will affect shipping times.
- Partial shipments may be required based on current factory inventory.

Catalog Number Example

RND--DIR-LM-SUR-WH-OP-30K-C80-UNV-010V-04000LF-DM-2FT

A RANGE

QS ROUND RND - DIR

H VOLTAGE

QS 120V/277V UNV

B SUB CATEGORY

QS Luminaire LM

I DIMMING

QS 0-10V 1% 0 1 0 V

C MOUNTING

QS Surface SUR

QS Pendant PDT

J OUTPUT LM

QS Ø 1 1/2' 2000lm 0 2 0 0 0 L

QS 3000lm 0 3 0 0 0 L

QS Ø 2' 3000lm 0 3 0 0 0 L

QS 4000lm 0 4 0 0 0 L

QS Ø 3' 5000lm 0 5 0 0 0 L

QS 6000lm 0 6 0 0 0 L

D COLOR

QS White WH

K CIRCUIT / EM

QS Single circuit *

* leave blank

E LENS

QS Opal cover OP

F CCT

QS 3000K 3 0 K

QS 3500K 3 5 K

L DIAMETER IN FT

QS Ø 1 1/2' DM - 1 . 5 FT

QS Ø 2' DM - 2 FT

QS Ø 3' DM - 3 FT

G CRI

QS CRI > 80 C 8 0

QS CRI > 90 C 9 0



Technical data


SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
Ø 1 1/2'	30K, 35K	20W	2080lm	100% down	2080lm	85%	102lm/W
	30K, 35K	34W	2970lm		2970lm		87lm/W
Ø 2'	30K, 35K	27W	3030lm	100% down	3030lm	85%	111lm/W
	30K, 35K	39W	4060lm		4060lm		104lm/W
	30K, 35K	53W	5080lm		5070lm		96lm/W
	30K, 35K	43W	5010lm		5010lm		116lm/W
Ø 3'	30K, 35K	53W	5970lm	100% down	5970lm	85%	113lm/W
	30K, 35K	75W	7980lm		7970lm		107lm/W
	30K, 35K	112W	10900lm		10890lm		98lm/W

Accessory


SUSPENSION SET < 36 INCH

3-piece barrel mount set 698 - 098 - 05140


ROUND 1 1/2' surface

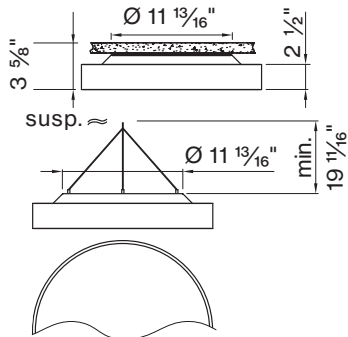

ROUND 2 1/2' surface

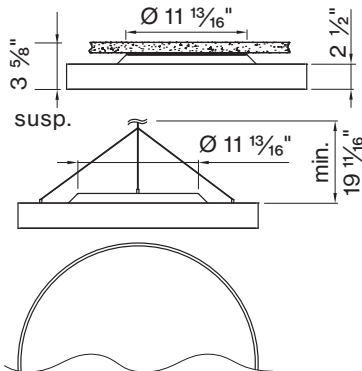

ROUND 3 1/2' surface

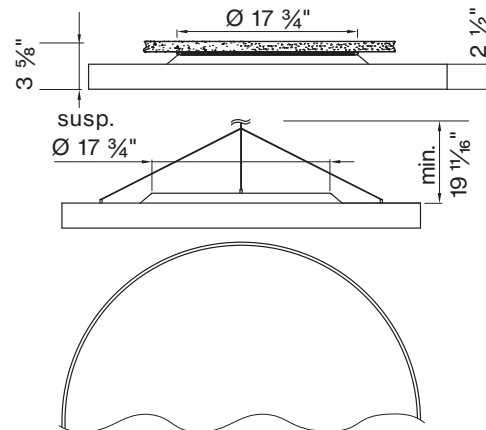

FIXTURE DIMENSIONS

NOMINAL	DIMENSIONS	CODE
Ø 1 1/2'	Ø 17 3/4" / h 3 1/2"	DM-1.5FT
Ø 2'	Ø 23 5/8" / h 3 1/2"	DM-2FT
Ø 3'	Ø 35 7/16" / h 3 1/2"	DM-3FT

ROUND mounting instructions

Get access to the ROUND mounting instructions faster by scanning the QR code.



www.basolighting.com/resources/mounting-instructions/round