


ROUND

DIRECT/INDIRECT




PERFORMANCE

- Up to 125 lm/W efficiency
- 27 K, 30 K, 35 K, 40 K
- CRI > 80 & CRI > 90




MOUNTING

Surface




Pendant



ONE CLICK INSTALLATION

Mounting & electrical connection with one click

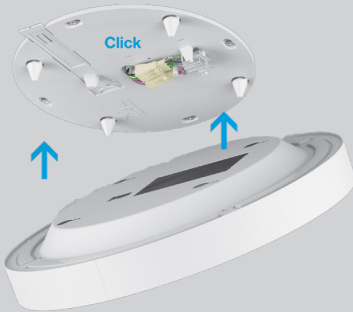

10 Business Days for all QuickShip items

- Maximum quantity: 25 pieces
- "QuickShip" must be clearly listed on PO.
- QuickShip items must be on Separate Purchase Order.
- QuickShip orders must be received with complete and correct catalog numbers.
- Variant request will not qualify for QuickShip program.
- QuickShip orders must be received before 2 pm EST. After 2 pm, shipping will be based on the next business day.
- QuickShip orders are based on standard BASO terms for payment.
- Order change of any type will affect shipping times.
- Partial shipments may be required based on current factory inventory.



Catalog Number Example

RND-D/I-RD-SUR-WH-OP-35K-C80-UNV-010V-04000LF-DM-2FT

A RANGE

QS ROUND V E L A - D / I

H VOLTAGE

QS 120V/277V UNV

B SUB CATEGORY

QS Round R D

I DIMMING

QS 0-10V 1% 0 1 0 V

C MOUNTING

QS Surface S U R

QS Pendant P D T

J OUTPUT LM

QS Ø 1 1/2' 2900lm 0 2 9 0 0 L

QS 4100lm 0 4 1 0 0 L

QS Ø 2' 4000lm 0 4 0 0 0 L

QS 5400lm 0 5 4 0 0 L

QS Ø 3' 6800lm 0 6 8 0 0 L

QS 7800lm 0 7 8 0 0 L

D COLOR

QS White W H

K CIRCUIT / EM

QS Single circuit *
* leave blank

E LENS

QS Opal cover O P

F CCT

QS 3000 K 3 0 K

QS 3500 K 3 5 K

L DIAMETER IN FT

QS Ø 1 1/2' DM - 1 . 5 F T

QS Ø 2' DM - 2 F T


QS Ø 3' DM - 3 F T

G CRI

QS CRI > 80 C 8 0

QS CRI > 90 C 9 0

Technical data


	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT			
	Ø 1 1/2'	30K, 35K	28 W	2870lm	73% down / 27% up	2090lm	780lm	86%	102lm/W
		30K, 35K	47 W	4070lm	73% down / 27% up	2990lm	1090lm		87lm/W
	Ø 2'	30K, 35K	35 W	4020lm	76% down / 24% up	3060lm	960lm	86%	114lm/W
		30K, 35K	50 W	5400lm	76% down / 24% up	4090lm	1310lm		107lm/W
		30K, 35K	64 W	6450lm	80% down / 20% up	5110lm	1330lm		100lm/W
		30K, 35K	57 W	6830lm	74% down / 26% up	5050lm	1780lm	86%	119lm/W
	Ø 3'	30K, 35K	67 W	7800lm	80% down / 20% up	6020lm	1780lm		117lm/W
		30K, 35K	91 W	10130lm	80% down / 20% up	8040lm	2080lm		111lm/W
		30K, 35K	135 W	13790lm	80% down / 20% up	10980lm	2800lm		102lm/W

Accessory


SUSPENSION SET < 36 INCH

3-piece barrel mount set 6 9 8 - 0 9 8 - 0 5 1 4 0


ROUND 1 1/2' surface

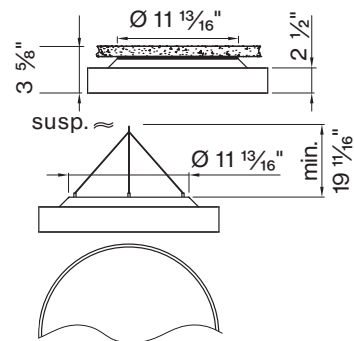

ROUND 2 1/2' surface

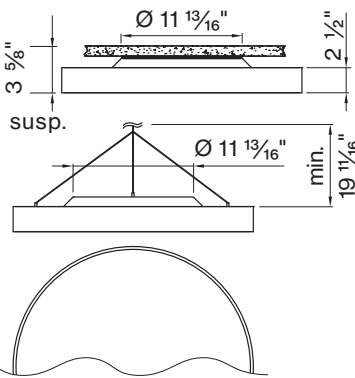

ROUND 3 1/2' surface

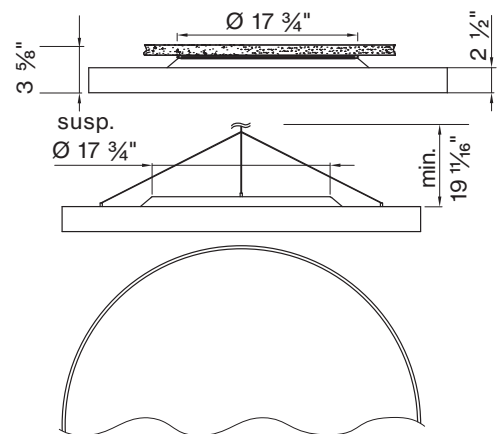

FIXTURE DIMENSIONS

NOMINAL	DIMENSIONS	CODE
Ø 1 1/2'	Ø 17 3/4" / h 3 1/2"	DM-1.5FT
Ø 2'	Ø 23 5/8" / h 3 1/2"	DM-2FT
Ø 3'	Ø 35 7/16" / h 3 1/2"	DM-3FT

ROUND mounting instructions

Get access to the ROUND mounting instructions faster by scanning the QR code.



www.xalusa.com/resources/mounting-instructions/round