


R-LINE®

TRACK WITH UPLIGHT



5 YEAR
limited
led warranty

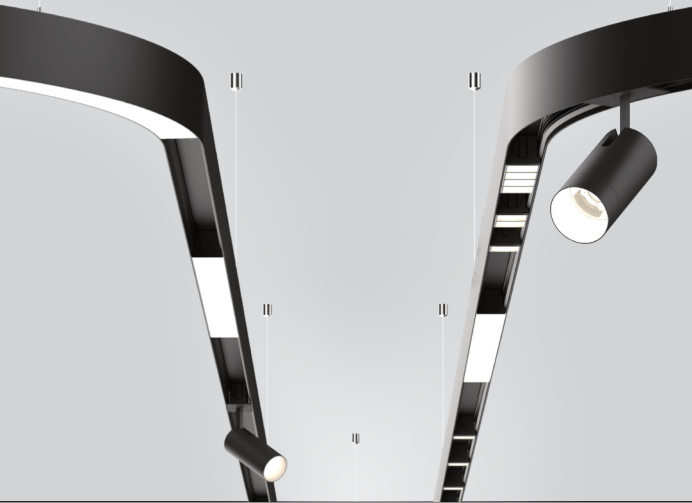

MOUNTING




Indirect
Suspended

PERFORMANCE

- 350 - 700lm/ft uplight
- Modular 48V track system
- R1 and R2 channel
- Combine linear, curve, and track
- Patented technology
- Customizable

INSET OPTIONS



Opal

Spotlight

Decorative

COMPATIBLE CONTROLS & FEATURES

ATHENA
WIRELESS NODE by
CLUTRON



CONFIGURATIONS



Linear


Corner

Curve

CERTIFICATIONS & COMPLIANCE



DIMENSIONS



R1

R2

Catalog Number Example

RLTR-R1-PDT-BLBL-T2765-C90-BW-48V-010V-TW-700LF-LS-M90-02-B1

A B C D E F G H I J K L

A RANGE

R1 Track 1" track	RLTR-R1
R2 Track 2" track	RLTR-R2

B MOUNTING

Pendant Cable	PDT
Pendant Stem coming soon	STM
Custom Mount	XXX

custom mount, please contact BASO

C HOUSING COLOR

Black RAL9005	BL
White RAL9016	WH
Custom RAL	XX

custom RAL, please contact BASO

PENDANT HARDWARE COLOR

sub option

Black	BL
White	WH

power feed, stem & canopy cover only; AC cable & barrel mount come in silver

D CCT/CRI

2700K / CRI >90	27K - C90
3000K / CRI >90	30K - C90
3500K / CRI >90	35K - C90
4000K / CRI >90	40K - C90
1800-4000K Tunable White	T1840 - C90
2700-6500K Tunable White	T2765 - C90

E UPLIGHT LENS

Opal	OP
Batwing	BW

batwing not available in tunable white

VOLTAGE

48V low constant voltage	48V
--------------------------	-----

remote driver required (see driver cutsheet)

F DIMMING

0-10V 1% dimming	010V
DALI	DALI

G CIRCUIT

Static White 1 or 2 Circuit	SC
Tunable White (TW)	TW

*leave blank

H UPLIGHT OUTPUT

350 lm/ft 4W	350LF
700 lm/ft 8W	700LF

I PATTERNS

Linear	ST
L-Shape (90°)	LS
U-Shape (90°)	US
R-Shape (90°)	RS
Z-Shape (90°)	ZS
Custom Pattern	CP

custom angles and patterns, please contact BASO

J CORNERS

No Corners	*
Mitered 90°	M90
Curved Radius 18"/90°	R18
Curved Radius 24"/90°	R24
Curved Radius 36"/90°	R36

custom radius and angles, please contact BASO
*leave empty

K DIMENSIONS 1" increments only

2' 0" min. length	02
4' 0"	04
6' 0"	06
8' 0"	08
Shape / Pattern	XX
Custom	XX

custom pattern, please contact BASO

Optional Accessories

ships separately

L BLIND COVERS

Blind Cover 1" flush with R1 track	B1
------------------------------------	----

includes field cuttable blind cover (end to end)

Other Options

+ TRACK WITHOUT UPLIGHT

see R-Line Track cutsheet


BASO
basolighting.com

CS-V01


07/2026

DIMENSIONS


R1




R2




R1/R2

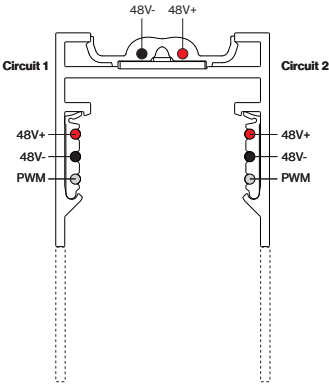

POWER FEED




ELECTRICAL CONNECTOR

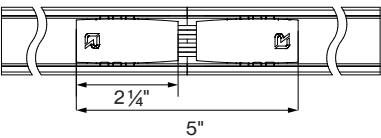

ELECTRICAL CONNECTOR




L-Configuration

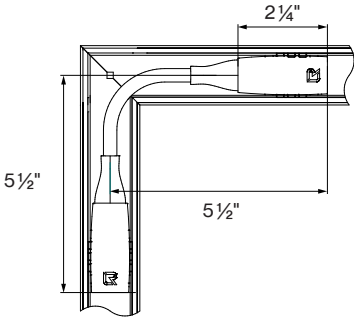

Insets cannot be placed on top of power feeds and electrical connectors.


ELECTRICAL CONNECTOR

X-Configuration

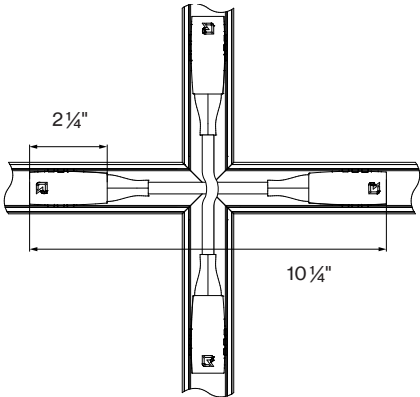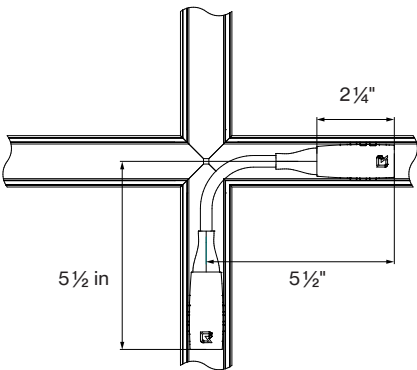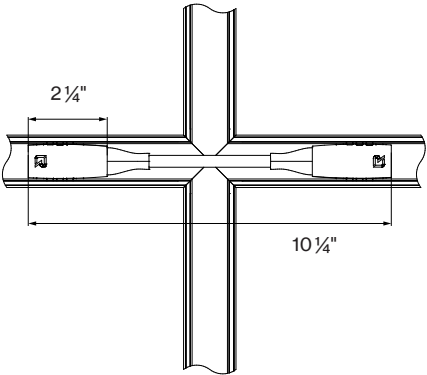


CIRCUIT DIAGRAM

Single Circuit with Uplight
(With options to control together)

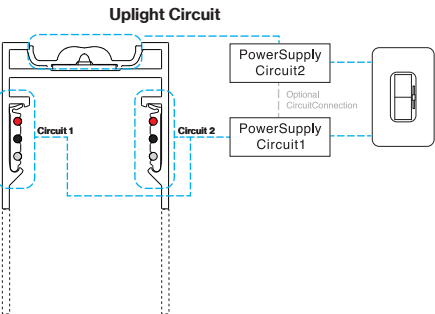

Two Circuit w/ Uplight

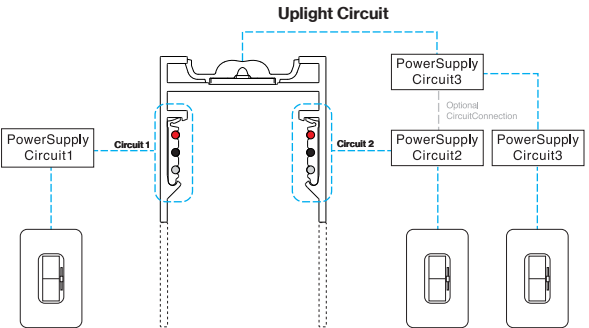

R1/R2 PDT W/ UPLIGHT

