R-LINE®

TRACK WITH UPLIGHT

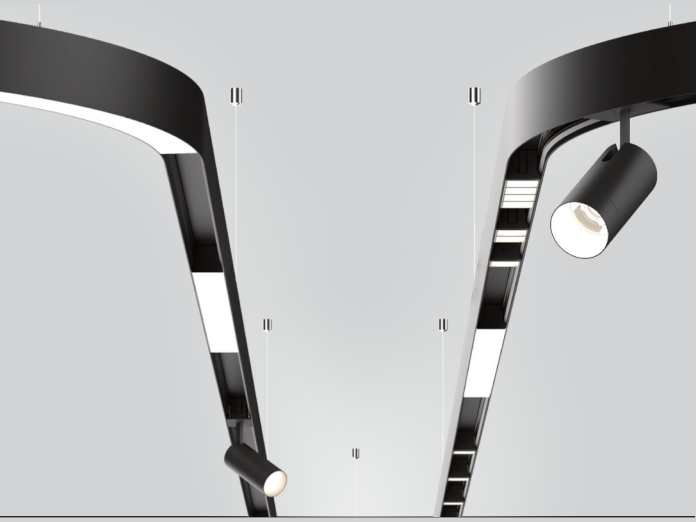

5 YEAR limited led warranty

MOUNTING

Indirect Suspended

PERFORMANCE

- 350 - 700lm/ft uplight
- Modular 48V track system
- R1 and R2 channel
- Combine linear, curve, and track
- Patented technology
- Opal and batwing uplight option
- Customizable





COMPATIBLE CONTROLS & FEATURES

ATHENA WIRELESS NODE by LUTRON · nLIGHT · SENSOR READY · consult factory

PATTERNS



L-shape U-shape R-shape T-shape *X-shape

CERTIFICATIONS & COMPLIANCE

c UL us · RoHS compliant · TITLE 24 JA8

DIMENSIONS



R1 R2

Catalog Number Example

RLTR-R1-PDT-BLBL-T2765-C90-OP-48V-010V-TW-700LF-LS-M90-02-B1

A B C D E F G H I J K L

A RANGE

R1 Track 1" track	RLTR-R1
R2 Track 2" track	RLTR-R2

B MOUNTING

Pendant Cable	PDT
Custom Mount	XXX

custom mount, please contact BASO

C HOUSING COLOR

Black RAL9005	BL__
White RAL9016	WH__
Custom RAL	XX__

custom RAL, please contact BASO

PENDANT HARDWARE COLOR

sub option

Black	__BL
White	__WH

power feed, stem & canopy cover only; AC cable & barrel mount come in silver

D CCT/CRI

2700K / CRI >90	27K-C90
3000K / CRI >90	30K-C90
3500K / CRI >90	35K-C90
4000K / CRI >90	40K-C90
1800-4000K Tunable White	T1840-C90
2700-6500K Tunable White	T2765-C90

E UPLIGHT LENS

Opal	OP
Batwing	BW

batwing not available in tunable white

VOLTAGE

48V low constant voltage	48V

remote driver required (see driver cutsheet)

F DIMMING

0-10V 1 % dimming	010V
DALI	DALI

G CIRCUIT

Static White 1 or 2 Circuit	SC
Tunable White (TW)	TW

*leave blank

H UPLIGHT OUTPUT

350 lm/ft 4W	350LF
700 lm/ft 8W	700LF

I PATTERNS

Linear	ST
L-Shape (90°)	LS
U-Shape (90°)	US
R-Shape (90°)	RS
Z-Shape (90°)	ZS
Custom Pattern	CP

custom angles and patterns, please contact BASO

J CORNERS

No Corners	*
Mitered 90°	M90
Curved Radius 18"/90°	R18
Curved Radius 24"/90°	R24
Curved Radius 36"/90°	R36

custom radius and angles, please contact BASO

*leave empty

K DIMENSIONS *1'increments only*

2' 0" min. length	02
4' 0"	04
6' 0"	06
8' 0"	08
Shape / Pattern	xx
Custom	xx

custom pattern, please contact BASO

Optional Accessories

ships seperately

L BLIND COVERS

Blind Cover 1" flush with R1 track	B1

includes field cuttable blind cover (end to end)

Other Options

+ TRACK WITHOUT UPLIGHT

see R-Line Track cutsheet

BASO
basolighting.com

DIMENSIONS

R1



R2



POWER TRACK CIRCUITRY

R1/R2

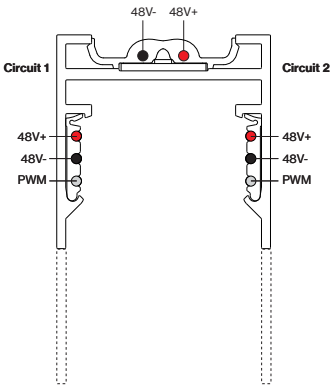

POWER FEED



ELECTRICAL CONNECTOR

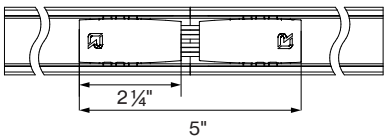

ELECTRICAL CONNECTOR

L-Configuration

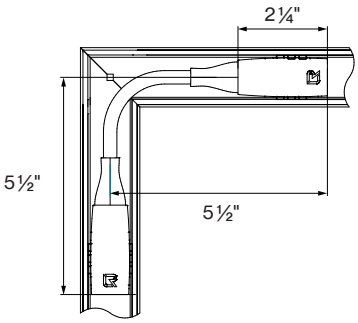

Insets cannot be placed on top of power feeds and electrical connectors.

ELECTRICAL CONNECTOR

X-Configuration

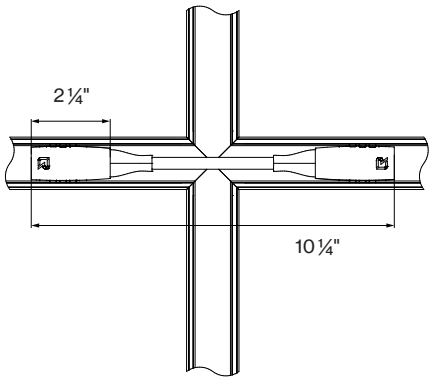

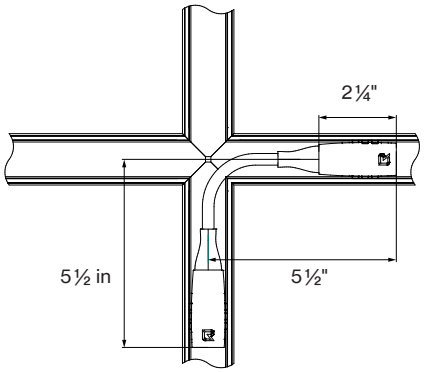

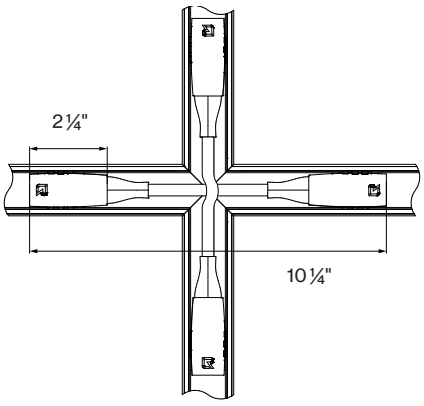

CIRCUIT DIAGRAM

Single Circuit with Uplight
(With options to control together)

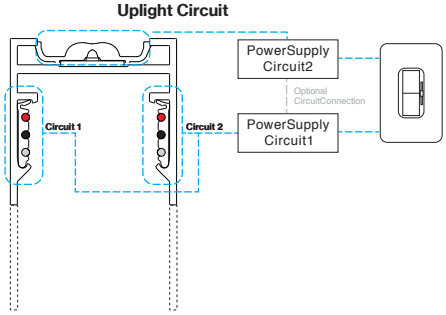

Two Circuit w/ Uplight

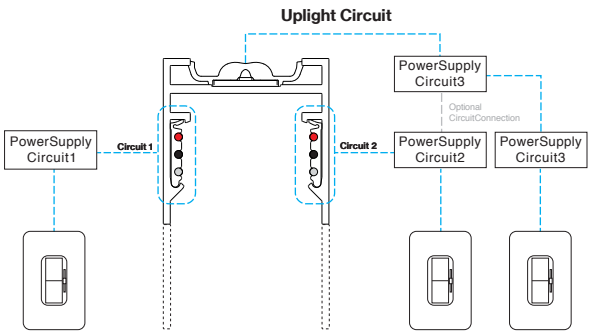

SYSTEM COMPONENTS (SIDE VIEW)

R1/R2 PDT W/ UPLIGHT

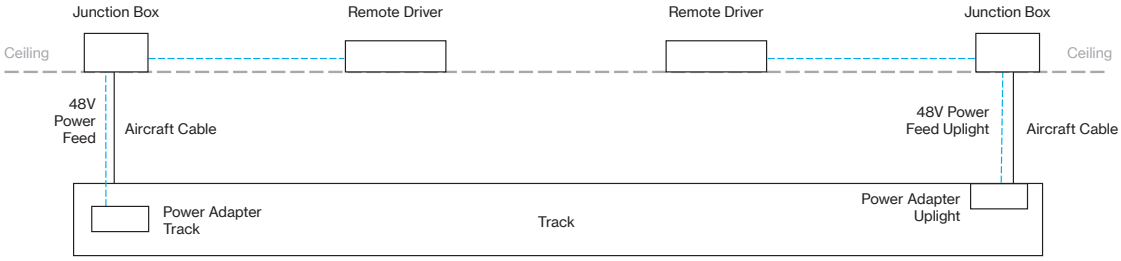

TRACK DIAGRAM (SIDE VIEW)

R1/R2 RTL

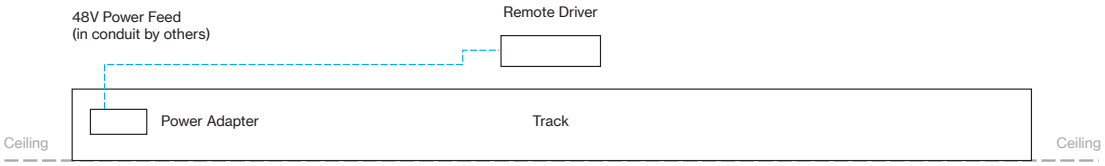

R1/R2 SUR

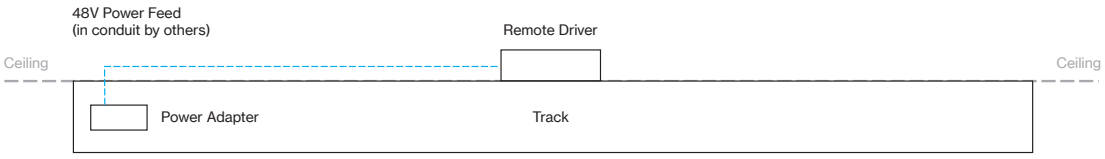

R1/R2 PDT

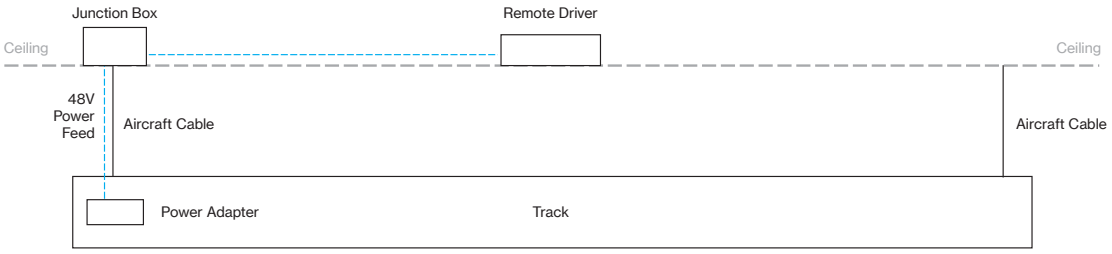

R3 PDT

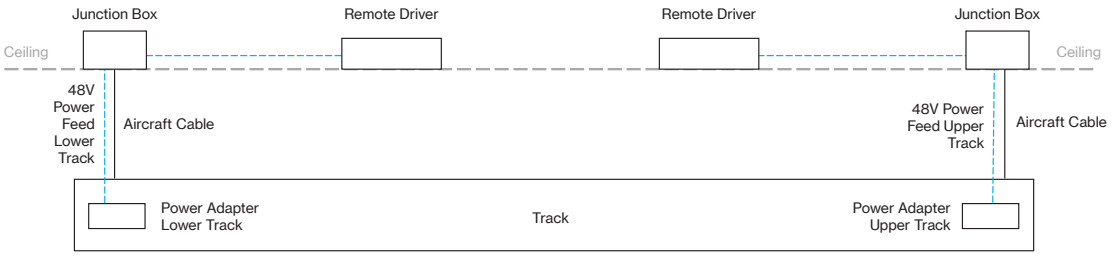

R-LINE mounting instructions

Get access to the R-LINE mounting instructions faster by scanning the QR code.

https://www.basolighting.com/resources/mounting-instructions/baso