

### CERTIFICATIONS & COMPLIANCE




### FEATURES

**5 YEAR**  
limited  
led warranty

### CONFIGURATIONS




R1 Track  
1" Inset



R2 Track  
1" Inset



R2 Track  
2" Inset



R3 Track  
1" Inset

### COLORS



Black



White

### Catalog Number Example

RLINS-OPAL-1-BL-27K-C90-48V-010V-300LF-3F-04FT

A B C D E F G I J

#### A PRODUCT

R-LINE R L I N S

#### B PRODUCT

Linear Opal O P A L

#### C INSET HEIGHT

1" Inset flush with R1/R3 track 1  
2" Inset available Q1 2024 2

#### D ADAPTER COLOR

Black B L  
White W H  
recommendation: adapter & track color should match

#### E CCT/CRI

2700K /CRI>90 2 7 K - C 9 0  
3000K /CRI>90 3 0 K - C 9 0  
3500K /CRI>90 3 5 K - C 9 0  
4000K / CRI >90 4 0 K - C 9 0

#### F VOLTAGE

48V low constant voltage 4 8 V  
remote driver required (see driver cutsheet)

#### G DIMMING

0-10V 1% dimming 0 1 0 V

#### H CIRCUIT

1 or 2 Circuit \*  
compatible with 1 or 2 track(see driver wiring diagram)  
\*leave empty

#### I OUTPUT

300 lm/ft. 3W/ft. 3 0 0 L F - 3 W F  
700 lm/ft. 7W/ft. 7 0 0 L F - 7 W F

#### J DIMENSION

1 FT 0 1 FT  
2 FT 0 2 FT  
3 FT 0 3 FT  
4 FT 0 4 FT

### Optional Accessories

*ships separately*

#### K EMERGENCY CIRCUIT

Emergency Circuit Brackets E M C  
set of brackets to permanently secure linear opal inset

#### OPTIONAL

Inset with Power Connector P C  
Inset with Power Feed P F

### Other Options

#### + LOUVER

see R-Line Louver cutsheet





#### + CURVE OPAL

see R-Line Curve Opal cutsheet

#### + SPOT CURVE OPAL

see R-Line Spot cutsheet

# DIMENSIONS

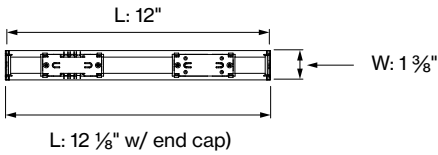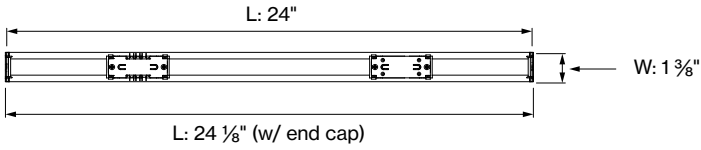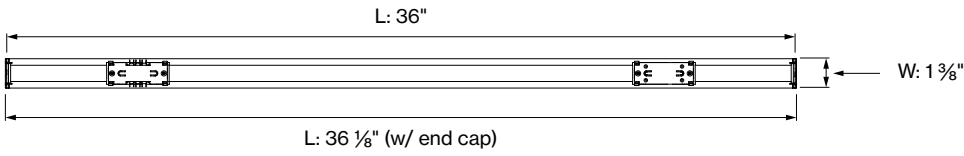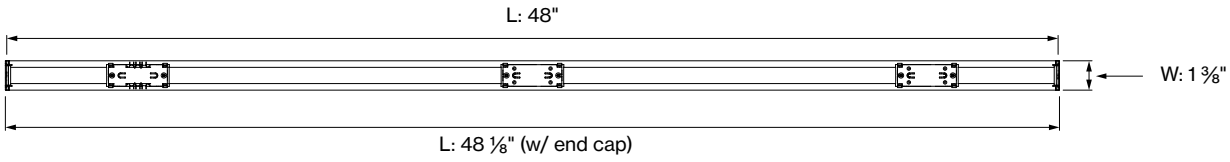

**R-LINE OPAL LINEAR/CURVE**  
**BASO Inc.**

**Final Assembly:** Oxford, Connecticut, USA  
**Life Expectancy:** 7 Year(s)  
**End of Life Options:** Recyclable (80%), Landfill (20%)

**Ingredients:**  
 Polymethyl methacrylate; Small electrical components<sup>1</sup>; Copper; Steel manufacture, chemicals

<sup>1</sup>LBC Temp Exception RL-002 - Small Electrical Components

**Living Building Challenge Criteria:** Compliant

**I-13 Red List:**  
 LBC Red List Free      % Disclosed: 100% at 100ppm  
 LBC Red List Approved      VOC Content: Not Applicable  
 Declared

**I-10 Interior Performance:** Not Applicable  
**I-14 Responsible Sourcing:** Not Applicable

XAL-0006  
 EXP. 01 AUG 2025  
 Original Issue Date: 2024

MANUFACTURED RESPONSIBLY FOR LABEL ACCURACY  
 INTERNATIONAL LIVING FUTURE INSTITUTE™ [living-future.org/declare](http://living-future.org/declare)