R-LINE®
HEX

5 YEAR limited led warranty

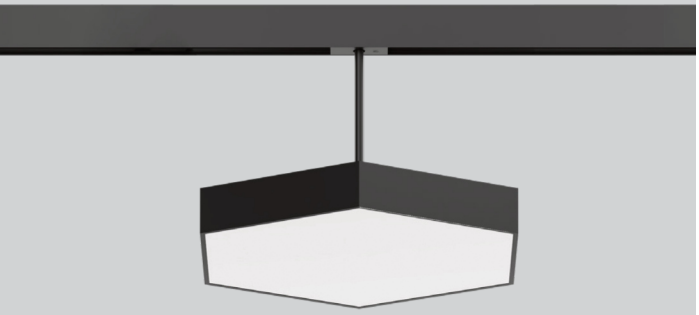

PERFORMANCE

- Up to 100lm/W
- 500 - 1000 delivered lumens
- Decorative pendant shapes
- CRI > 90
- Customizable



COMPATIBLE CONTROLS & FEATURES

ATHENA WIRELESS NODE by LUTRON · nLIGHT · SENSOR READY · consult factory

CERTIFICATIONS & COMPLIANCE

cULus · RoHS compliant · TITLE 24 JA8

DIMENSIONS

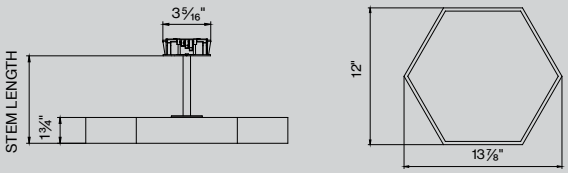

Catalog Number Example

RLINS-HEX-BLBL-T2765-C90-48V-010V-TW-1000LM-DM-1FT-STM-6IN-R18

A B C D E F G H I J K

A RANGE

R-LINE	R L I N S

B PRODUCT

HEX	H E X

C HOUSING COLOR

Black RAL9005	B L _ _
White RAL9016	WH _ _
Custom RAL	X X _ _

custom RAL, please contact BASO

ADAPTER & STEM COLOR sub option

Black	_ _ B L
White	_ _ WH

recommendation: adapter & track color should match

D CCT/CRI

2700K / CRI >90	2 7 K - C 9 0
3000K / CRI >90	3 0 K - C 9 0
3500K / CRI >90	3 5 K - C 9 0
4000K / CRI >90	4 0 K - C 9 0
1800-4000K Tunable White	T 1 8 4 0 - C 9 0
2700-6500K Tunable White	T 2 7 6 5 - C 9 0

E VOLTAGE

48V low constant voltage	4 8 V

remote driver required (see driver cutsheet)

F DIMMING

0-10V 1 % dimming	0 1 0 V
DALI	D A L I

G CIRCUIT

Static White 1 or 2 Circuit	S C
Tunable White (TW)	T W

*leave blank

H OUTPUT

500 lm 5W	5 0 0 LM
750 lm 7.5W	7 5 0 LM
1000 lm 10W	1 0 0 0 LM

I SIZE

1' diameter	D M - 1 F T

J STEM LENGTH*

6" stem	S T M - 6 I N
96" stem	S T M - 9 6 I N
Custom stem	X X X I N

*Stem lengths available in 6" increments from 6" to 96". Stems are not field-cuttable.

K ADAPTER COVER

ship standard with straight cover (field changeable)

Curved R18"	R 1 8
Curved R24"	R 2 4
Curved R36"	R 3 6
Straight	S T R

BASO
basolighting.com

DIMENSIONS

HEX

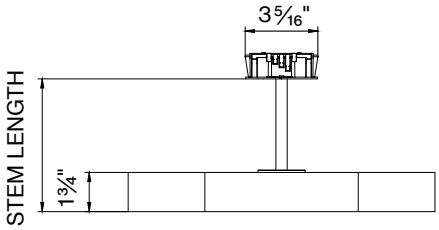

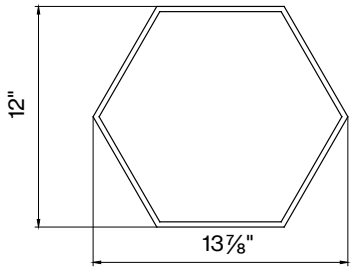

R-LINE mounting instructions

Get access to the R-LINE mounting instructions faster by scanning the QR code.

https://www.basolighting.com/resources/mounting-instructions/baso