R-LINE®
LOUVER

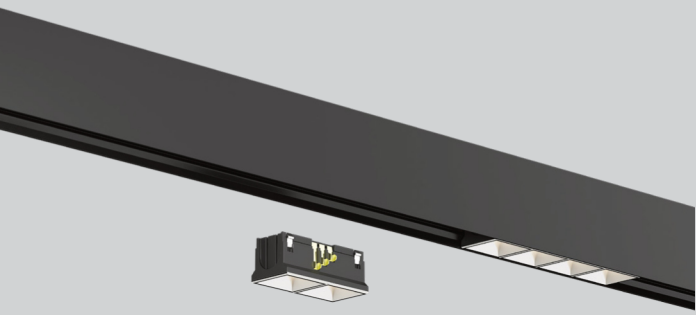

5 YEAR limited led warranty

CONFIGURATIONS

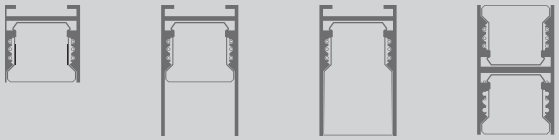

R1 Track 1"Inset | R2 Track 1"Inset | R2 Track 2"Inset | R3 Track 1"Inset

PERFORMANCE

- Up to 100lm/W
- 100 delivered lumens
- CRI > 90
- Customizable



COMPATIBLE CONTROLS & FEATURES

ATHENA WIRELESS NODE by LUTRON | ILIGHT | SENSOR READY | consult factory

RELECTOR COLOR

Black | White | Chrome

ADAPTER COLORS

Black | White

CERTIFICATIONS & COMPLIANCE

cULus | RoHS compliant | TITLE 24 JA8

DIMENSIONS

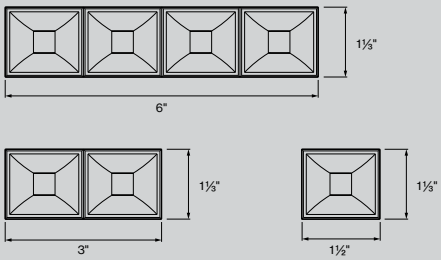

Catalog Number Example

RLINS-LOUVER-1-BMBL-T2765-C90-48V-010V-TW-100LL-2CE

A B C D E F G H I J K

A RANGE

R-LINE	RLINS

B PRODUCT

Louver shallow inset	LOUVER

C INSET HEIGHT

1" Inset flush with R1/R3 track	1
2"Inset flush with R2 track	2

D REFLECTOR COLOR

Black Matte	BM_ _
Black Gloss	BG_ _
White Matte	WM_ _
White Gloss	WG_ _
Chrome	CH_ _

E ADAPTER COLOR

Black	_ _BL
White	_ _WH

recommendation: adapter & track color should match

F CCT/CRI

2700K / CRI >90	27K-C90
3000K / CRI >90	30K-C90
3500K / CRI >90	35K-C90
4000K / CRI >90	40K-C90
1800-4000K Tunable White	T1840-C90
2700-6500K Tunable White	T2765-C90

G VOLTAGE

48V low constant voltage	48V

remote driver required (see driver cutsheet)

H DIMMING

0-10V 1% dimming	010V
DALI	DALI

I CIRCUIT

Static White 1 or 2 Circuit	SC
Tunable White (TW)	TW

tunable white not compatible with 1-Cell Louver

J OUTPUT

100 lm/louver	100LL

K CELLS

1-Cell 100lm / 2.0w	1CE
2-Cell 200lm / 4.0w	2CE
4-Cell 400lm / 6.0w	4CE

1-Cell tunable white only compatible with DALI
tunable white not compatible with 1-Cell Louver

L EMERCENCY CIRCUIT*

Emercency Circuit Brackets	EMC

*set of brackets to permanetly secure linear opal inset

OPTIONAL*

Inset with Power Connector	PC
Inset with Power Feed	PF

*please contact BASO for pricing

Other Options

+ LINEAR OPAL

see R-Line Linear Opal cutsheet

+ CURVE OPAL

see R-Line Curve Opal cutsheet

+ SPOT

see R-Line Spot cutsheet

LOUVER LENS

	LOR	LUMEN MULTIPLIER	LUMEN PER LOUVER	LUMEN PER WATT
LOUVER Matte White	67.3	1	100 lm/L	49-71 lm/W
LOUVER Glossy White	65.5	0.97	97 lm/L	49-71 lm/W
LOUVER Matte Black	49.4	0.73	73lm/L	49-71 lm/W
LOUVER Glossy Black	49.1	0.73	73lm/L	49-71 lm/W
LOUVER Chrome	65.4	0.97	97 lm/L	49-71 lm/W

Multiplier for direct lens ONLY

BASO
basolighting.com