R-LINE®
SPHERE

5 YEAR limited led warranty

PERFORMANCE

- Up to 100lm/W
- 500 - 750 delivered lumens
- Decorative pendant shapes
- CRI > 90
- Customizable



COMPATIBLE CONTROLS & FEATURES

ATHENA WIRELESS NODE by LUTRON · nLIGHT · SENSOR READY · consult factory

CERTIFICATIONS & COMPLIANCE

cULus · RoHS compliant · TITLE 24 JA8

DIMENSIONS

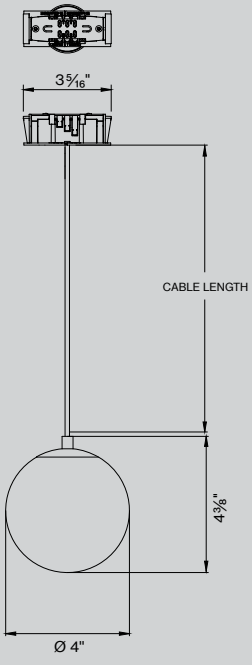

Catalog Number Example

RLINS-SPHERE-WH-BL-T2765-C90-48V-010V-TW-500LM-DM-4IN-CBL-6IN

A B C D E F G H I J K

A RANGE

R-LINE inset	R L I N S

B INSET TYPE

SPHERE	S P H E R E

C GLASS COLOR

White (Opaque)	WH _ _

D ADAPTER & CABLE COLOR

sub option

Black	_ _ B L
White	_ _ WH

E CCT/CRI

2700K / CRI >90	2 7 K - C 9 0
3000K / CRI >90	3 0 K - C 9 0
3500K / CRI >90	3 5 K - C 9 0
4000K / CRI >90	4 0 K - C 9 0
1800-4000K Tunable White	T 1 8 4 0 - C 9 0
2700-6500K Tunable White	T 2 7 6 5 - C 9 0

F VOLTAGE

48V low constant voltage	4 8 V

G DIMMING

0-10V 1 % dimming	0 1 0 V
DALI	D A L I

H CIRCUIT

Static White 1 or 2 Circuit	S C
Tunable White (TW)	T W

*leave blank

I OUTPUT

500 lm/ft 8W	5 0 0 L M
750 lm/ft 10W	7 5 0 L M

J SIZE

4" diameter	D M - 4 I N

K CABLE LENGTH

6“ cable	C B L - 6 I N
96“ cable	C B L - 9 6 I N

Cable lengths available in 6" increments from 6" to 96".

BASO
basolighting.com

DIMENSIONS

SPHERE

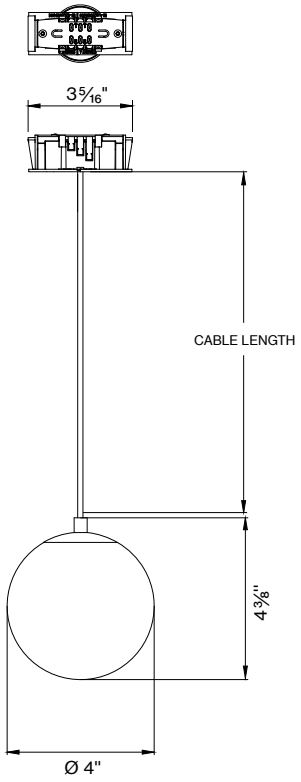

R-LINE mounting instructions

Get access to the R-LINE mounting instructions faster by scanning the QR code.

https://www.basolighting.com/resources/mounting-instructions/r-line