R-LINE®
TUBE

5 YEAR limited led warranty

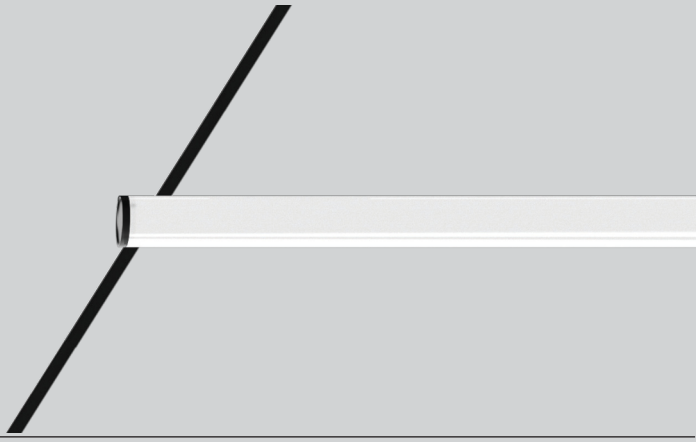

PERFORMANCE

- Up to 100lm/W
- 300 - 600 delivered lm/ft
- Decorative pendant shapes
- CRI > 90
- Customizable



COMPATIBLE CONTROLS & FEATURES

ATHENA WIRELESS NODE by LUTRON · ilLIGHT · SENSOR READY · consult factory

CERTIFICATIONS & COMPLIANCE

cULus · RoHS compliant · TITLE 24 JA8

DIMENSIONS

TUBE R1/R3

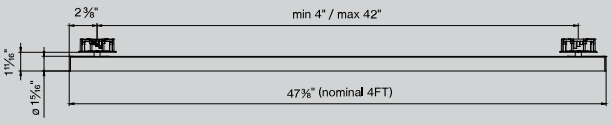

TUBE R2

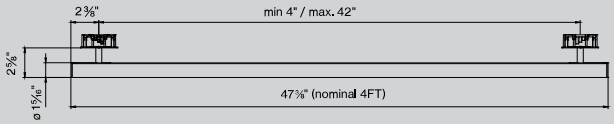

Catalog Number Example

RLINS-TUBE-1-BLBL-T2765-C90-48V-010V-TW-0600LF-01FT-R18

A B C D E F G H I J K

Ⓐ RANGE

R-LINE inset	R L I N S

Ⓑ INSET TYPE

TUBE	T U B E

Ⓒ INSET HEIGHT

R1/R3 Inset	1
R2 Inset	2

Ⓓ ENDCAP COLOR

Black RAL9005	B L _ _
White RAL9016	W H _ _

ADAPTER & STEM COLOR

sub option

Black	_ _ B L
White	_ _ W H

Ⓔ CCT/CRI

2700K / CRI >90	2 7 K - C 9 0
3000K / CRI >90	3 0 K - C 9 0
3500K / CRI >90	3 5 K - C 9 0
4000K / CRI >90	4 0 K - C 9 0
1800-4000K Tunable White	T 1 8 4 0 - C 9 0
2700-6500K Tunable White	T 2 7 6 5 - C 9 0

Ⓕ VOLTAGE

48V low constant voltage	4 8 V

Ⓖ DIMMING

0-10V 1 % dimming	0 1 0 V
DALI	D A L I

Ⓗ CIRCUIT

Static White 1 or 2 Circuit	S C
Tunable White (TW)	T W

*leave blank

Ⓘ OUTPUT

300 lm/ft	0 3 0 0 L F
600 lm/ft	0 6 0 0 L F

Ⓙ DIMENSIONS IN FT

1 FT	0 1 F T
2 FT	0 2 F T
3 FT	0 3 F T
4 FT	0 4 F T

Optional Accessories

ships separately

Ⓚ ADAPTER COVER

ship standard with straight cover (field changeable)

Curved R18"	R 1 8
Curved R24"	R 2 4
Curved R36"	R 3 6
Straight	S T R

BASO
basolighting.com

DIMENSIONS

TUBE 1

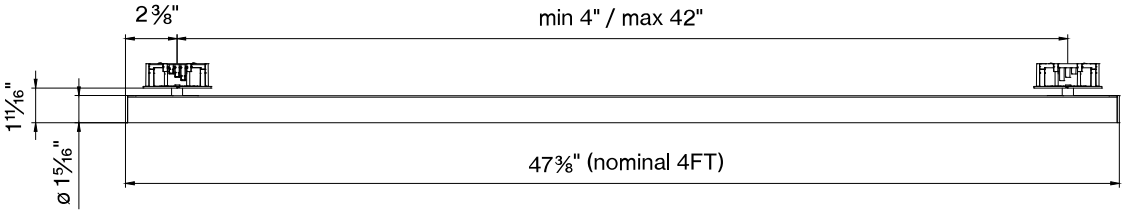

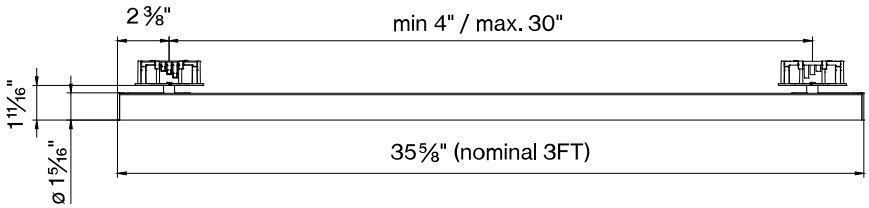

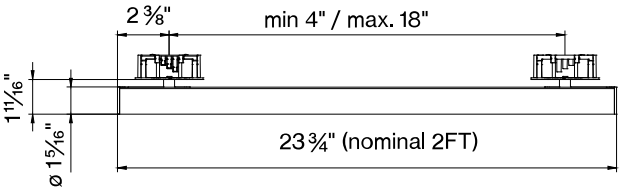

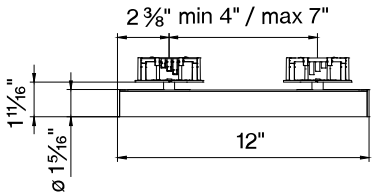

DIMENSIONS

TUBE R2 Track

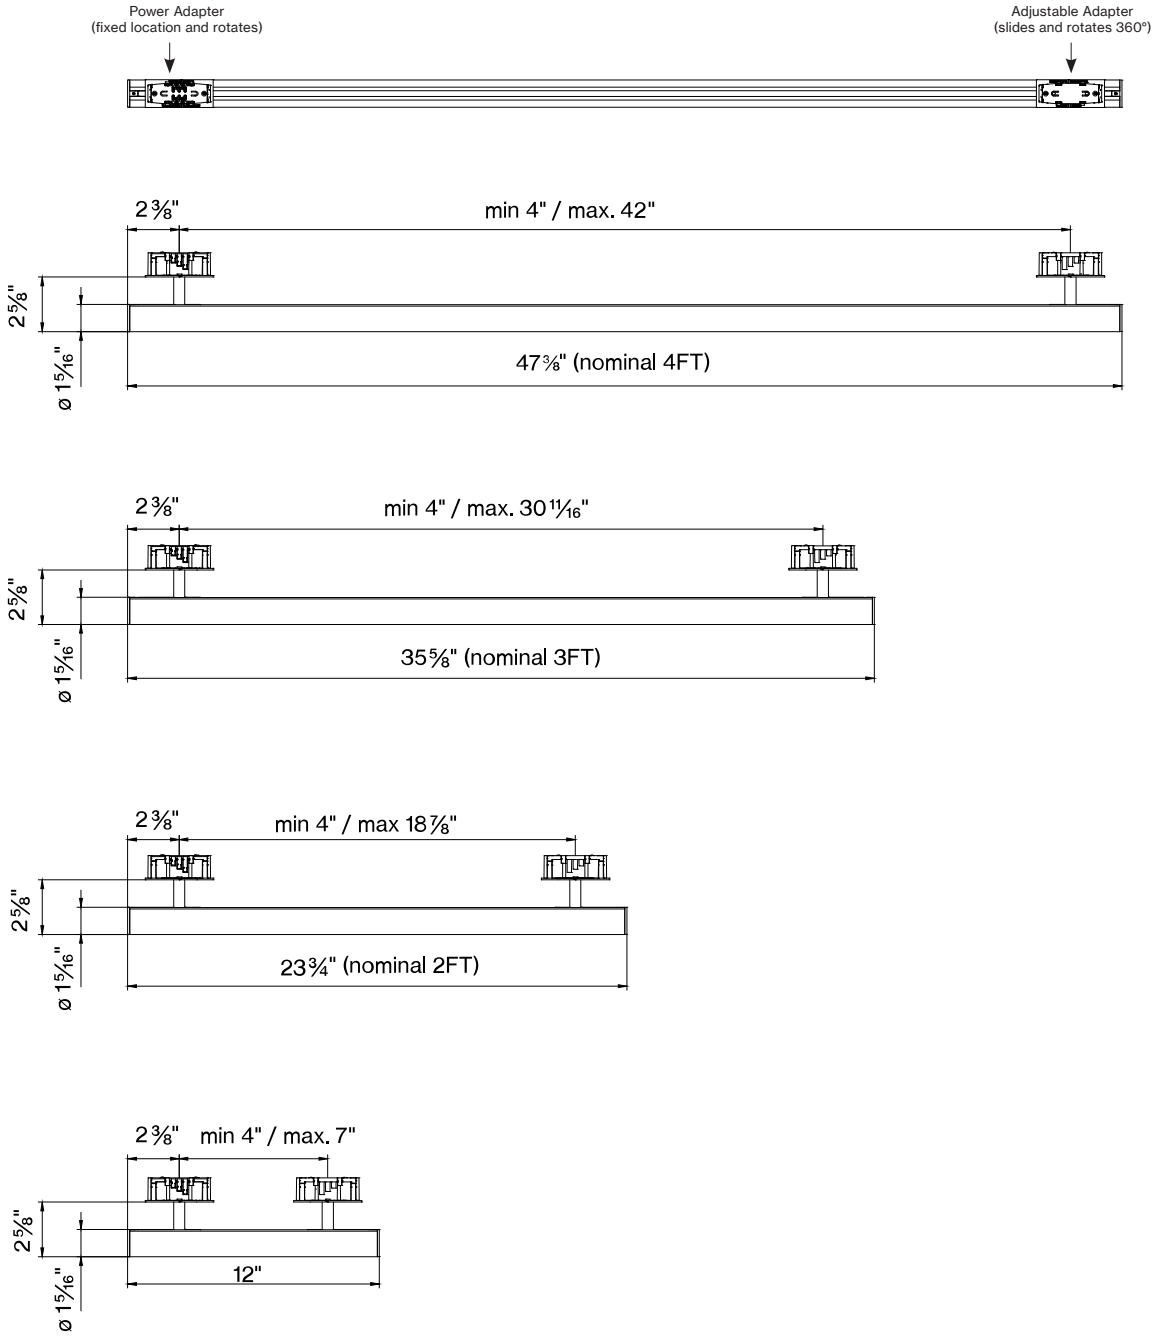

R-LINE mounting instructions

Get access to the R-LINE mounting instructions faster by scanning the QR code.

https://www.basolighting.com/resources/mounting-instructions/baso