R-LINE®
TULIP

5 YEAR limited led warranty

PERFORMANCE

- Up to 100lm/W
- 500 - 1000 delivered lumens
- Decorative pendant shapes
- CRI > 90
- Customizable



BEAM ANGLE

COMPATIBLE CONTROLS & FEATURES

ATHENA WIRELESS NODE by LUTRON · HLIGHT · SENSOR READY · consult factory

CERTIFICATIONS & COMPLIANCE

cULus · RoHS compliant · TITLE 24 JA8

DIMENSIONS

TULIP

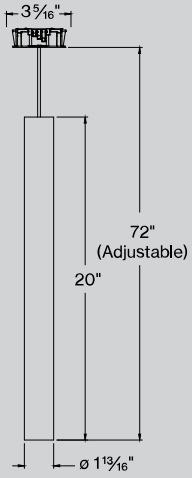

Catalog Number Example

RLINS-TULIP-BLBL-T2765-C90-48V-010V-TW-12D-500LM-R18-HL

A B C D E F G H I J K

A RANGE

R-LINE inset	R L I N S

B INSET TYPE

TULIP flood 37˚	T U L I P

for specific stem/cable lengths, please contact customer service

C HOUSING COLOR

Black RAL9005	B L _ _
White RAL9016	WH _ _
Custom RAL	X X _ _

custom RAL, please contact BASO

ADAPTER & CABLE COLOR

sub option

Black	_ _ B L
White	_ _ WH

D CCT/CRI

2700K / CRI >90	2 7 K - C 9 0
3000K / CRI >90	3 0 K - C 9 0
3500K / CRI >90	3 5 K - C 9 0
4000K / CRI >90	4 0 K - C 9 0
1800-4000K Tunable White	T 1 8 4 0 - C 9 0
2700-6500K Tunable White	T 2 7 6 5 - C 9 0

E VOLTAGE

48V low constant voltage	4 8 V

F DIMMING

0-10V 1 % dimming	0 1 0 V
DALI	D A L I

G CIRCUIT

Static White 1 or 2 Circuit	S C
Tunable White (TW)	T W

*leave blank

H BEAM ANGLE Spot 1.5

12° spot	1 2 D
21° medium	2 1 D
35° flood	3 5 D
58° ultra wide flood	5 8 D

I OUTPUT

500 lm 5W	5 0 0 LM
750 lm 7.5W	7 5 0 LM
1000 lm 10W	1 0 0 0 LM

Optional Accessories

ships separately

J ADAPTER COVER

ship standard with straight cover (field changeable)

Curved R18"	R 1 8
Curved R24"	R 2 4
Curved R36"	R 3 6
Straight	S T R

K FILTER

No Filter	*
Hex Louver	H L
Solite Filter	S F

*leave blank

BASO
basolighting.com