

# ROUND

## ACOUSTIC INDIRECT



### CERTIFICATIONS & COMPLIANCE



### FEATURES


**5 YEAR**  
limited  
led warranty



**POE**  
Power over Ethernet


### PERFORMANCE

- Welded aluminum fixture housing
- Powder coated white, gray, or black
- CRI > 80 or CRI 90
- Acoustic lay-in cover




### MOUNTING

Surface




Pendant



### ONE CLICK INSTALLATION

Mounting & electrical connection with one click

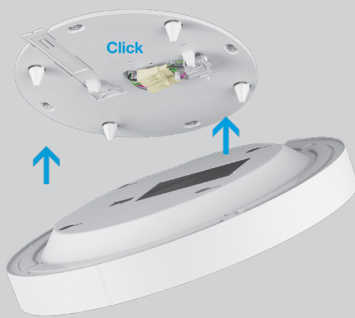

### Catalog Number Example

ROUND-A/I-LI-SUR-BL-AG-27K-C80-UNV-010V-02900L-DM-2FT

A B C D E F G H I J L

#### A RANGE

ROUND Acoustic ROUND-A/I

#### B SUB CATEGORY

Lay-in acoustic L I

#### C MOUNTING

Surface SUR  
Pendant P D T

pendant suspension set includes cable suspension and one white power feeder with a white junction box cover

#### D COLOR HOUSING

White WH  
Black B L  
Gray G R  
Custom color RAL X X

#### E COLOR ACOUSTIC

White WH  
Light gray L G  
Anthracite gray A G

#### F CCT

CS 2700K 2 7 K  
CS 3000K 3 0 K  
3500K 3 5 K  
4000K 4 0 K

#### G CRI

CRI > 80 C 8 0  
CRI > 90 C 9 0

#### H VOLTAGE

Universal 120/277 UNV  
347 V (only 0-10V dim) 3 4 7

#### I DIMMING

0-10V 1%	0 1 0 V
DALI	D A L I
Lutron EcoSystem Quantum, Vive, GRAFIK Eye, HomeWorks	L E S 1
Power over ethernet	P O E C

consult customer service for compatibility

#### J OUTPUT LM

Ø 1 1/2'	790lm	0 2 9 0 0 L
	1090lm	0 4 1 0 0 L
Ø 2'	960lm	0 4 0 0 0 L
	1310lm	0 5 4 0 0 L
	1330lm*	0 6 5 0 0 L
Ø 3'	1780lm	0 6 8 0 0 L
	1780lm	0 7 8 0 0 L
	2080lm	1 0 1 0 0 L
	2910lm	1 3 8 0 0 L

item code matches with coordinating  
ROUND Direct/Indirect fixture

\*only 0-10V and DALI dimming available

#### K CIRCUIT / EM

Single circuit \*

\*leave blank

#### L DIAMETER IN FT

Ø 1 1/2'	DM - 1 . 5 FT
Ø 2'	DM - 2 FT
Ø 3'	DM - 3 FT

**Technical data**


SIZE TYPE	LED COLOR TEMPERATURE	LIGHT DISTRIBUTION	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	
Ø 1 1/2' gray	27K, 30K,	100% up	780lm	86%	102lm/W
	35K, 40K		810lm		107lm/W
	27K, 30K,	100% up	1090lm	86%	87lm/W
	35K, 40K		1130lm		91lm/W
Ø 2' gray	27K, 30K,	100% up	960lm	86%	114lm/W
	35K, 40K		1000lm		118lm/W
	27K, 30K,	100% up	1310lm	86%	107lm/W
	35K, 40K		1360lm		111lm/W
	27K, 30K,	100% up	1330lm	86%	100lm/W
	35K, 40K		1380lm		104lm/W
Ø 3' gray	27K, 30K,	100% up	1780lm	86%	119lm/W
	35K, 40K		1850lm		124lm/W
	27K, 30K,	100% up	1780lm	86%	117lm/W
	35K, 40K		1850lm		121lm/W
	27K, 30K,	100% up	2080lm	86%	111lm/W
	35K, 40K		2170lm		115lm/W
	27K, 30K,	100% up	2800lm	86%	102lm/W
	35K, 40K		2910lm		106lm/W

**Accessory**


**SUSPENSION SET < 36 INCH**

3-piece barrel mount set 698 - 098 - 05140


**ROUND 1 1/2' surface**

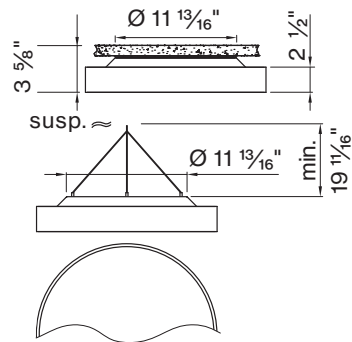

**ROUND 2' surface**

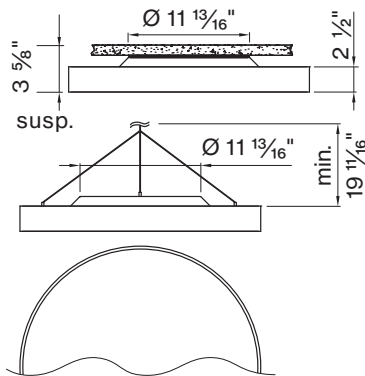

**ROUND 3' surface**

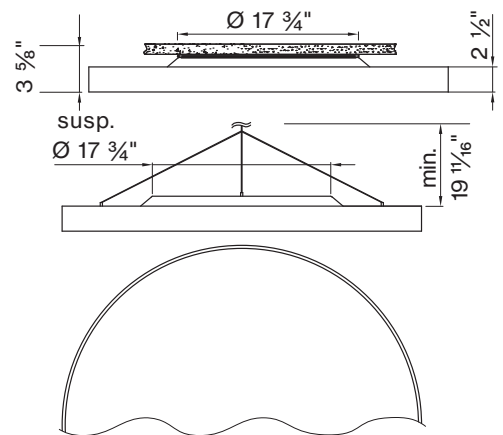

**FIXTURE DIMENSIONS**

NOMINAL	DIMENSIONS	CODE
Ø 1 1/2'	Ø 17 3/4" / h 3 1/2"	DM-1.5FT
Ø 2'	Ø 23 5/8" / h 3 1/2"	DM-2FT
Ø 3'	Ø 35 7/16" / h 3 1/2"	DM-3FT

**ROUND mounting instructions**

Get access to the ROUND mounting instructions faster by scanning the QR code.



[www.basolighting.com/resources/mounting-instructions/round](http://www.basolighting.com/resources/mounting-instructions/round)