

ROUND DIRECT



CERTIFICATIONS & COMPLIANCE




FEATURES

5 YEAR
limited
led warranty




PERFORMANCE

- Up to 123 lm/W efficiency
- 27 K, 30 K, 35 K, 40 K
- CRI > 80 & CRI > 90




MOUNTING

Surface




Pendant



ONE CLICK INSTALLATION

Mounting & electrical connection with one click

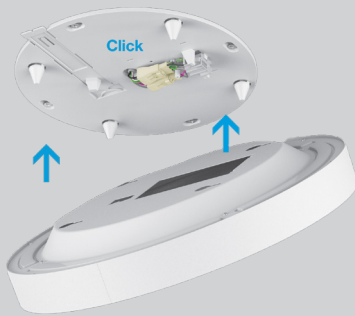

Catalog Number Example

ROUND-SUR-BL-OP-40K-C80-UNV-010V-02000L-DM-1.5FT

A B C D E F G H I K

A RANGE

QS ROUND ROUND

B MOUNTING

QS Surface SUR

QS Pendant PDT

pendant suspension set includes cable suspension and one white power feeder with a white junction box cover

C COLOR

QS White WH

Black BL

Gray GR

Custom color RAL XX

D LENS

QS Opal cover OP

E CCT

QS 2700K 27K

QS 3000K 30K

3500K 35K

4000K 40K

F CRI

QS CRI > 80 C80

QS CRI > 90 C90

G VOLTAGE

QS 120V/277V UNV

347 V 347

only 0-10 V dim

H DIMMING

0-10V 1% 010V

DALI DALI

Lutron EcoSystem LDE1

Quantum, Vive, GRAFIK Eye, HomeWorks

Power over ethernet POEC

consult customer service for compatibility

I OUTPUT LM

QS Ø 1 1/2' 2000lm 02000L

QS 3000lm 03000L

QS Ø 2' 3000lm 03000L

QS 4000lm 04000L

5000lm 05000L

QS Ø 3' 5000lm 05000L

QS 6000lm 06000L

8000lm 08000L

11000lm 11000L

J CIRCUIT / EM

QS Single circuit *

* leave blank

EMP EM battery pack EMB

Emergency battery pack only for 120 / 277 V option.

K DIAMETER IN FT

Ø 1 1/2' DM - 1.5 FT

Ø 2' DM - 2 FT

Ø 3' DM - 3 FT

Technical data


SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
Ø 1 ½' gray	27K, 30K,	20W	2080lm	100% down	2080lm	85%	102lm/W
	35K, 40K		2160lm		2160lm		106lm/W
	27K, 30K,	34W	2970lm		2970lm		87lm/W
	35K, 40K		3080lm		3080lm		90lm/W
Ø 2' gray	27K, 30K,	27W	3030lm	100% down	3030lm	85%	111lm/W
	35K, 40K		3160lm		3150lm		116lm/W
	27K, 30K,	39W	4060lm		4060lm		104lm/W
	35K, 40K		4220lm		4220lm		108lm/W
	27K, 30K,	53W	5080lm		5070lm		96lm/W
	35K, 40K		5280lm		5270lm		100lm/W
	Ø 3' gray	27K, 30K,	43W		5010lm		100% down
35K, 40K		5210lm		5210lm	121lm/W		
27K, 30K,		53W	5970lm	5970lm	113lm/W		
35K, 40K			6210lm	6210lm	118lm/W		
27K, 30K,		75W	7980lm	7970lm	107lm/W		
35K, 40K			8300lm	8290lm	111lm/W		
27K, 30K,		112W	10900lm	10890lm	98lm/W		
35K, 40K			11340lm	11330lm	102lm/W		

Accessory


SUSPENSION SET < 36 INCH

3-piece barrel mount set 698-098-05140


ROUND 1 ½' surface

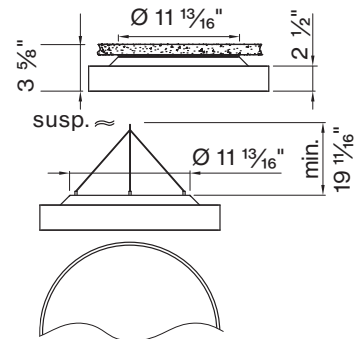

ROUND 2' surface

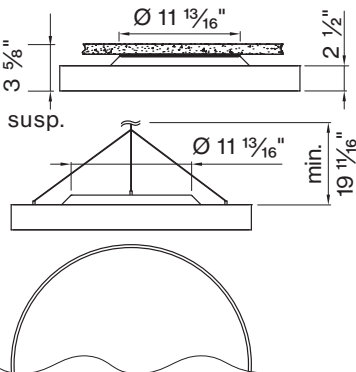

ROUND 3' surface

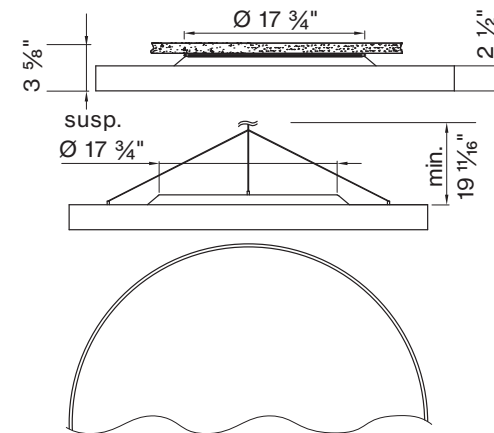

FIXTURE DIMENSIONS

NOMINAL	DIMENSIONS	CODE
Ø 1 ½'	Ø 11 13/16" / h 3 ½"	DM-1.5FT
Ø 2'	Ø 11 13/16" / h 3 ½"	DM-2FT
Ø 3'	Ø 17 3/4" / h 3 ½"	DM-3FT

ROUND mounting instructions

Get access to the ROUND mounting instructions faster by scanning the QR code.



www.basolighting.com/resources/mounting-instructions/round