




PERFORMANCE

- Up to 95lm/W
- CRI > 90
- Output of 1000lm/ft



OPTICS

DUAL OPTICS



Narrow
Beam 30°




Wide
Beam 95°

COMPATIBLE CONTROLS

ATHENA
WIRELESS NODE by
LUTRON



DIMENSIONS

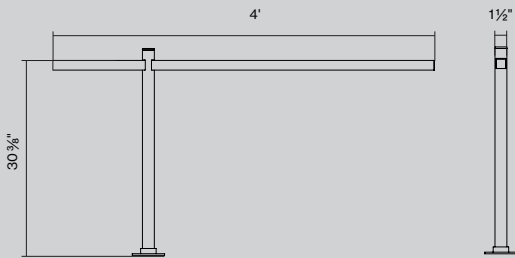

Catalog Number Example

SPLYN-DE-WH-30K-C90-PNP-010V-OPN-1000LF

A B C D E F G H I J

A RANGE

SPLYN SPLYN

E CRI

CRI > 90 C90

B MOUNTING

Desk Mount 60" DE

Spline Desk Mount 67" SP

**distance from floor to top of fixture*

F VOLTAGE

120V Plug-and-Play PNP

C COLOR

White WH

Black BL

Custom color RAL XX

G DIMMING

1-10V 1% dimming 110V

Lutron Athena LUT

nLight NLT

D CCT

3000 K 30K

3500 K 35K





4000 K 40K

H OUTPUT LM/FT UP

1000 lm/ft† 10.5W below 9ft 1000 L F


1500 lm/ft† 12W below 14.5ft 1500 L F

Dimensions

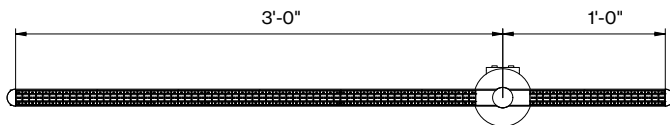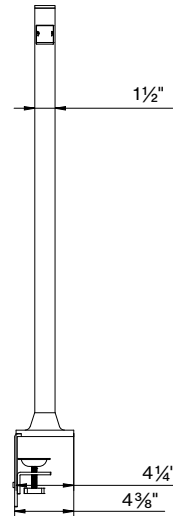
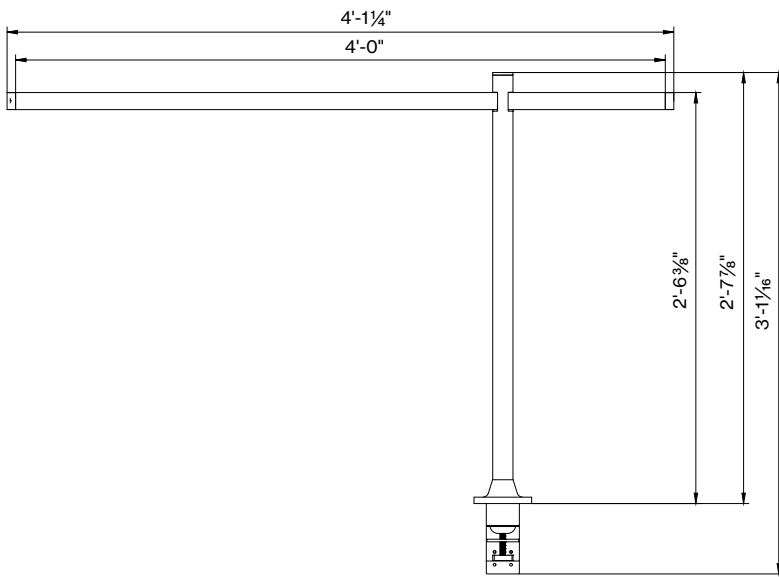
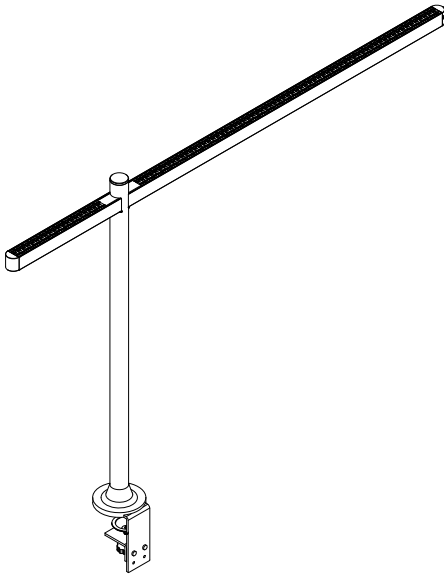


Dimensions

DESK MOUNT

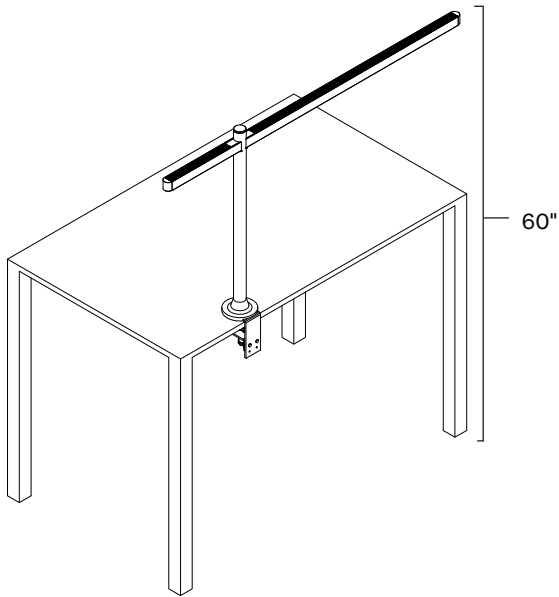

SPLINE DESK MOUNT

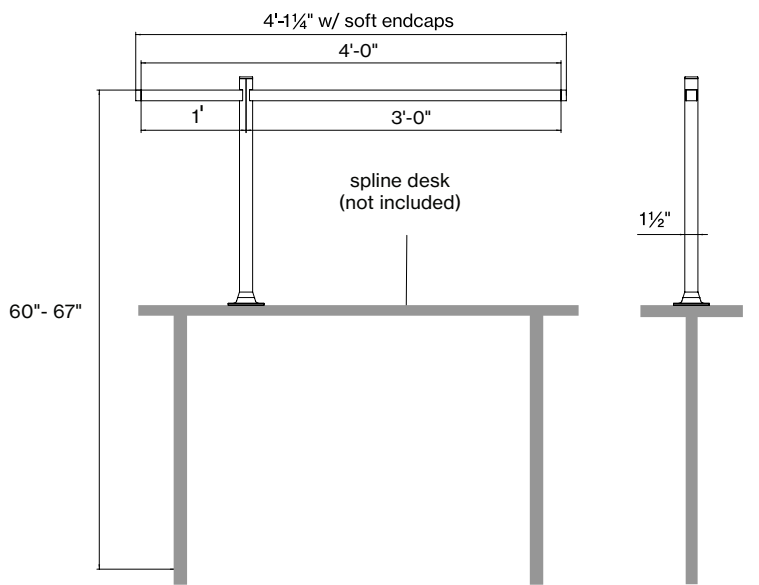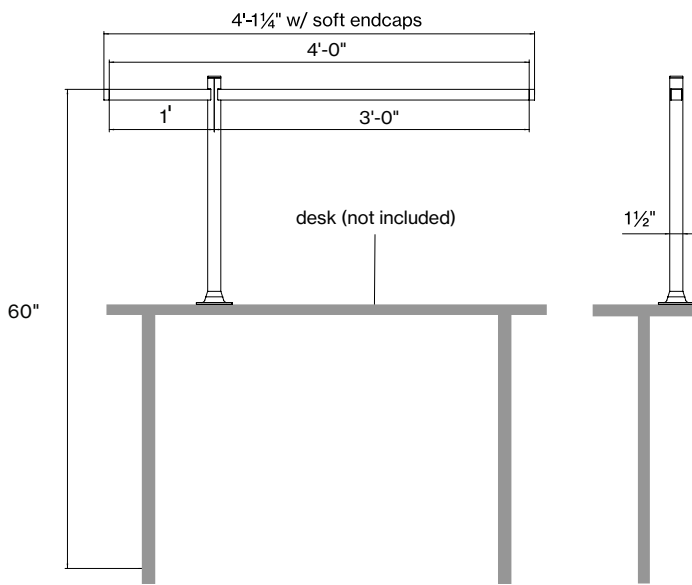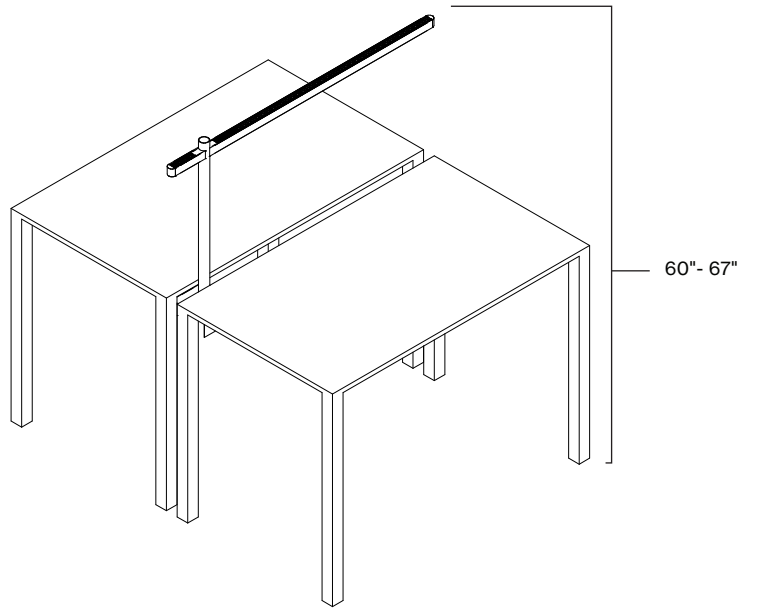

SPLYN mounting instructions

Get access to the SPLYN mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/splyn>

