

MONOPOINT

SPOT 2.0




CERTIFICATIONS & COMPLIANCE



FEATURES

5 YEAR
limited
led warranty

SPOT 2.0



BEAM ANGLE

SPOT 2.0



COLORS



Catalog Number Example

MPT-SPOT2.0-SUR-BLBL-30K-C90-21D-UNV-010V-1500LM-23W

A	B	C	D	E	F	G	H	I
---	---	---	---	---	---	---	---	---

A RANGE

MONOPOINT MPT-SPOT 2 . 0

B MOUNTING

Surface SUR

C COLOR HEAD

Black RAL9005	B L _ _
White RAL9016	W H _ _
Bronze Anodized	B Z _ _
Custom RAL	X X _ _

custom RAL, please contact BASO

D COLOR STEM & CANOPY COVER

Black	_ _ B L
White	_ _ W H

recommendation: adapter & track color should match

E CCT/CRI

2700K /CRI>90	2 7 K - C 9 0
3000K /CRI>90	3 0 K - C 9 0
3500K /CRI>90	3 5 K - C 9 0
4000K / CRI >90	4 0 K - C 9 0

F BEAM ANGLE Spot 1.5

12° spot	1 2 D
21° medium	2 1 D
35° flood	3 5 D
58° ultra wide flood	5 8 D

G VOLTAGE

120V / 277V UNV

H DIMMING

0-10V 1% dimming	0 1 0 V
------------------	---------

Lutron EcoSystem
Quantum, Vive, GRAFIK Eye, Home- Works L D E 1

Power over ethernet
consult customer service for compatibility POEC

For custom dimming protocol, please contact customer service

I OUTPUT SPOT 2.0

1000 lm 8W	1 0 0 0 LM - 12W
1500 lm 11W	1 5 0 0 LM - 23W
2000 lm 15W	2 0 0 0 LM - 27W

Accessories

ships pre-assembled

J FILTER

No Filter	*
Hex Louver	H L
Solite Filter	S F

*leave blank

K SNOOT

Standard Short Snoot	*
Anti Glare Snoot 1"	S N

*leave blank

L STEM LENGTH


TBD T B D

M CANOPY TYPE

Flat canopy F T C A

DIMENSIONS

SPOT 2.0

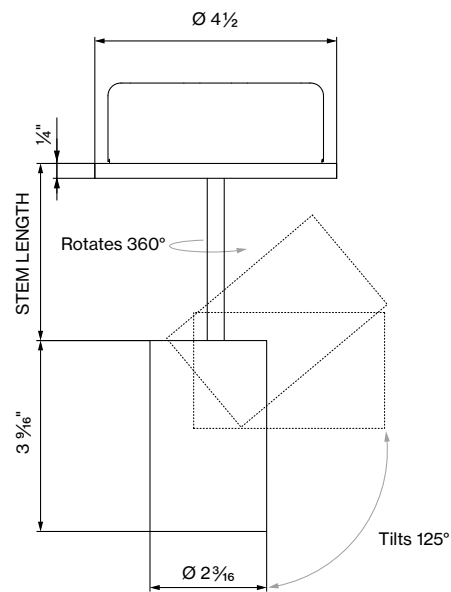

OPTIONS

