T-LINE
SPOT 3.0

5 YEAR limited led warranty

MOUNTING



TRACK

PERFORMANCE

- Up to 83lm/W
- 2500 delivered lm
- Built-In Driver
- Triac Dimming
- Adjustable 350°
- 90° Tilt
- 2 Circuit-2 Neutral

BEAM ANGLE

CERTIFICATIONS & COMPLIANCE

cULus

RoHS compliant

DIMENSIONS

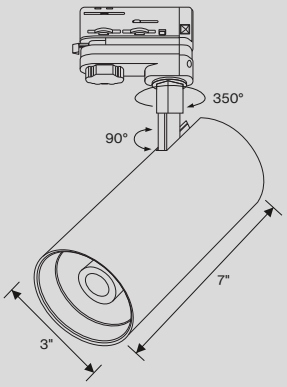

Catalog Number Example

TLINS-SPOT3.0-BL-30K-C90-120V-TRIA-2C-15D-2500LM-HCOMB

A B C D E F G H I J

A PRODUCT

T-LINE	T L I N S

B CONFIGURATION

SPOT	S P O T 3 . 0

C COLOR HEAD

White	W H
Black	B L

D CCT / CRI

3000 K / CRI > 90	3 0 K - C 9 0
3500 K / CRI > 90	3 5 K - C 9 0

E VOLTAGE

Line Voltage	1 2 0 V

F DIMMING

Triac Dimming	T R I A

G CIRCUIT

Two Circuit-Two Neutral	2 C

H BEAM ANGLE

15° spot	1 5 D
24° medium	2 4 D
36° flood	3 6 D
60° ultra wide flood	6 0 D

I OUTPUT SPOT 3.0

2500 lm 30W	2 5 0 0 L M

J ACCESSORY

No Accessory	*
Honeycomb Louver	H C O M B
Concentric Louver	C O N C
Solite Filter	S F

* leave blank

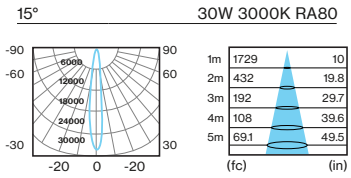



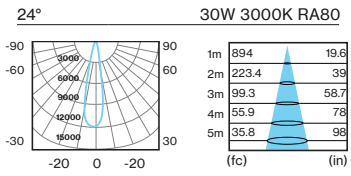



BASO
basolighting.com