


# M-LINE TUBE



## CERTIFICATIONS & COMPLIANCE

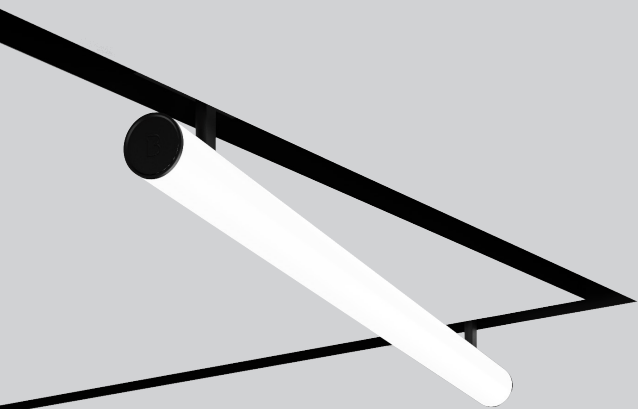


## FEATURES

**5 YEAR**  
limited  
led warranty


## PERFORMANCE

- Magnetic inset attachment
- CRI > 90
- Safety catch locking


## INSET TYPE TUBE



## ADDITIONAL FEATURES



attaches to M-LINE  
track via magnets



freely movable

## Catalog Number Example

MLINS-1.1TUBE-BL-35K-C90-010V-0590LF-3FT

A B C D E F G H

### A RANGE

M-LINE inset MLINS

### B INSET TYPE

TUBE 1.1 1.1 TUBE

TUBE 1.2 1.2 TUBE

### C COLOR

Black BL  
fine texture powder coated

### D CCT

2700 K 27 K  
3000 K 30 K  
3500 K 35 K  
4000 K 40 K

### E CRI

CRI > 90 C90

### F DIMMING

0-10V 1% single control 010V  
0-10V 1% dual control\* DC10  
\*two 0-10V dimming outputs  
wiring diagram is on power supply page


### G OUTPUT LM

590 lm/ft 100% 0590LF

### H DIMENSIONS IN FT

Linear 2' 10 W 2 FT  
Linear 3' 15 W 3 FT  
Linear 4' 20 W 4 FT

## TUBE inset

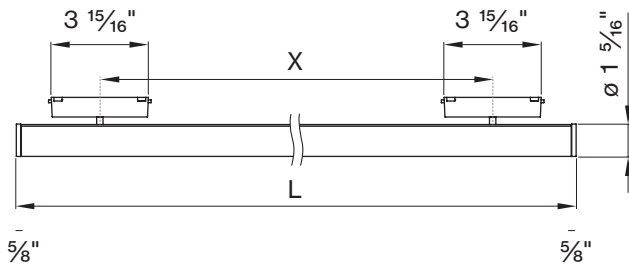

## CHANNEL SPACING

| L  | x                 |
|----|-------------------|
| 2' | 18 $\frac{3}{4}"$ |
| 3' | 30 $\frac{1}{2}"$ |
| 4' | 42 $\frac{1}{4}"$ |

X = maximum on center channel spacing

## M-LINE Mounting Instructions

Get access to the M-LINE mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/m-line>

