


# PANO 3.25"

## WOODWORKS® GRILLE CLASSIC



### CERTIFICATIONS & COMPLIANCE

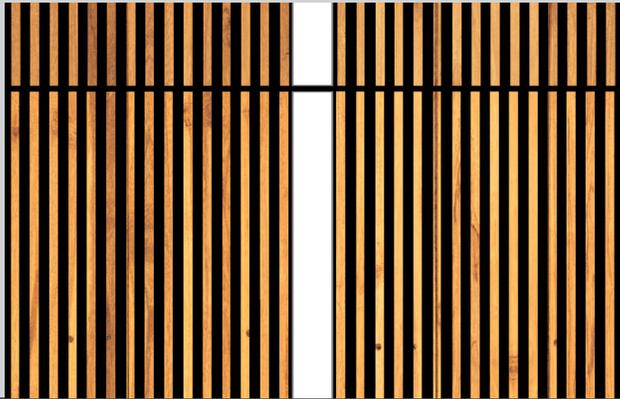


### FEATURES




### PERFORMANCE

- Coordinates with Woodworks® Grille ceiling panel
- Up to 122lm/W
- High performance opal cover
- Remote mountable LED driver
- Damp rated



### WoodWorks® Grille Ceiling Integration

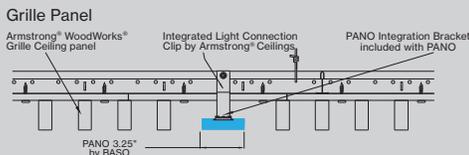

### REMOTE MOUNTING

Quick and easy electrical connection

REMOTE MOUNTING



### Catalog Number Example

PANO3-WWG-BL-PS-OP-27K-C80-UNV-010V-0450LF-ST-04FT



<b>A RANGE</b>	PANO 3.25"	PANO3	<b>H VOLTAGE</b>	120V / 277V	UNV
<b>B CEILING TYPE</b>	WoodWorks® Grille	WWG	<b>I DIMMING</b>	0-10V 1%	010V
	please contact your Armstrong® ceilings rep for the Integrated Light Connection Clip for the specified ceiling type		Lutron EcoSystem	LES1	
			Quantum, Vive, GRAFIK Eye, HomeWorks		
<b>C COLOR</b>	White	WH	Power over ethernet	POEC	
	Black	BL	consult customer service for compatibility		
			Custom dimming	XXX	
			consult customer service for compatibility		
<b>D POWER FEED LENGTH</b>	4' standard integrated	PS	<b>J OUTPUT LM/FT</b>	450lm/ft 100% ↓	0450LF
	10' medium remote option	PM	675lm/ft 100% ↓	0675LF	
	30' long remote option	PL	875lm/ft 100% ↓	0875LF	
	power feed distance denotes secondary wiring from detachable driver box to fixture; driver box comes with a 6ft conduit for primary wiring				
<b>E LENS</b>	HP opal cover	OP	<b>K CIRCUIT / EM</b>	Single circuit	*
			* leave blank		
			EMB EM battery pack	EMB	
			emergency battery pack only for 120/ 277V option (90 minute emergency operation)		
<b>F CCT</b>	2700K	27K	<b>L SHAPE / PATTERN</b>	Linear / straight	ST
	3000K	30K			
	3500K	35K			
	4000K	40K			
	Custom CCT	XXX	<b>M DIMENSIONS IN FT</b>	4' fixture	04FT
<b>G CRI</b>	CRI > 80	C80	6' fixture	06FT	
	CRI > 90	C90	8' fixture	08FT	
			fixture replaces full length of ceiling panel; please see table on next page and fixture length dimensions		


## Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LUMEN DIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
<b>PANO 3.25"</b>								
e LED	8' opal	40K	29.5 W	3600 lm	100 % down	3600 lm	79%	122 lm/W
e <sup>2</sup> LED	8' opal	40K	44.7 W	5400 lm	100 % down	5400 lm	79%	121 lm/W
e <sup>2+</sup> LED	8' opal	40K	58.9 W	7000 lm	100 % down	7000 lm	79%	119 lm/W

for 27 K, 30K or 35 K multiply lm value by 0.96

## WoodWorks® Grille Ceiling Integration

(for more ceiling options, please see CEILING OPTIONS pages)

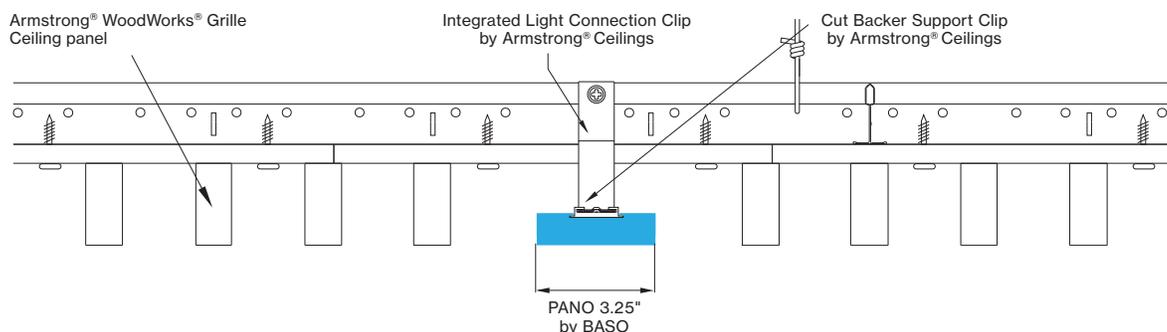

## Available lengths for ceiling types

CEILING TYPE	2 FT	4 FT	6 FT	8 FT
WoodWorks® Grille Tegular 9/16	23.375"	47.375"	n/a	n/a
WoodWorks® Grille Tegular 15/16	23"	47"	n/a	n/a
WoodWorks® Grille Classic	23"	47"	71"	95"
WoodWorks® Grille Forte	*23"	47"	71"	95"
WoodWorks® Linear Solid Wood panels	*23"	*47"	*71"	95"
WoodWorks® Linear Veneered panels	*23"	*47"	*71"	95.25"

\*Woodworks ceilings are not available in this length. Wood panels need to be cut in the field to fit this length.

## INTEGRATED LIGHT CONNECTION CLIP

Armstrong® Ceilings Integrated Light Connection Clip

visit [armstrongceilings.com/linearlighting](http://armstrongceilings.com/linearlighting)

please contact your Armstrong Ceilings rep

## WoodWorks® ceiling systems







BASO PANO is only approved for Armstrong® WoodWorks Grille Tegular 9/16, WoodWorks Grille Tegular 15/16, WoodWorks Grille, WoodWorks Linear Solid Wood panels and WoodWorks Linear Veneered panels ceiling systems. Refer to [armstrongceilings.com](http://armstrongceilings.com) for installation instructions related to the ceiling products.

DIMENSIONS



PANO 3.25"

WWG - ARMSTRONG® WOODWORKS® GRILLE PANELS

WWG view from below

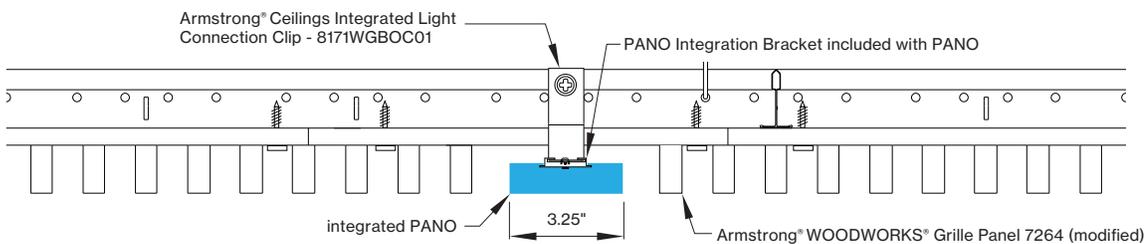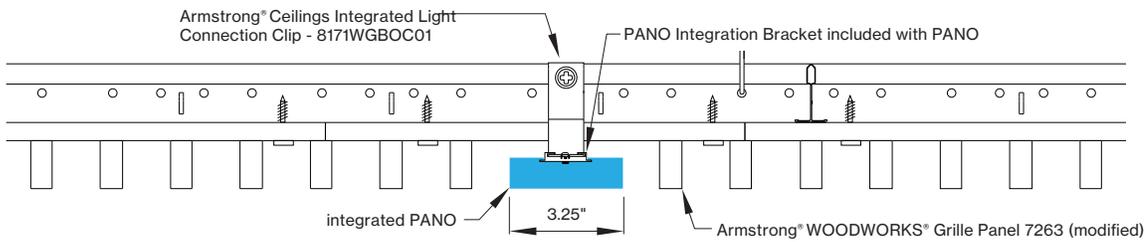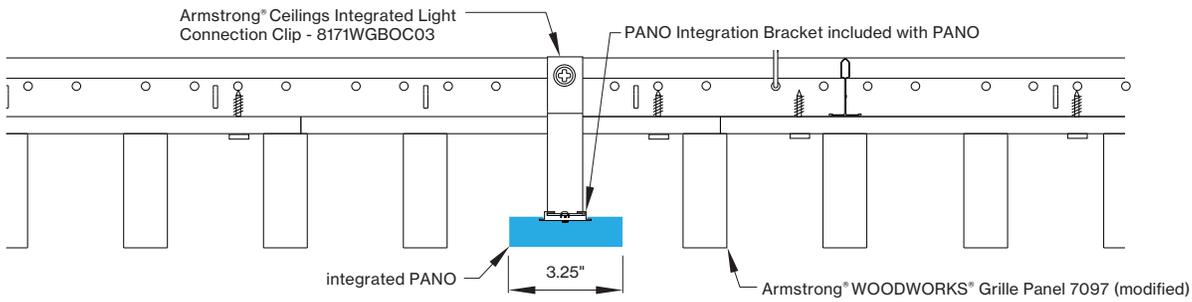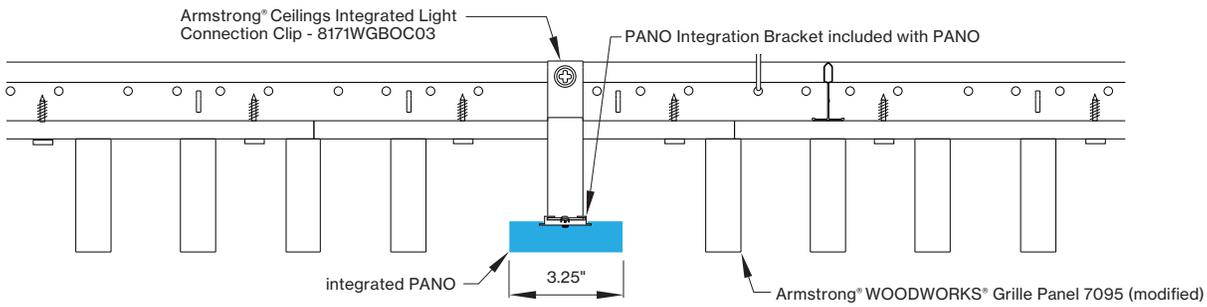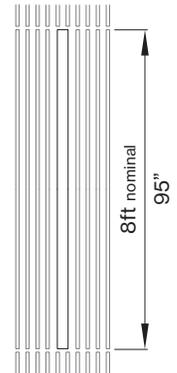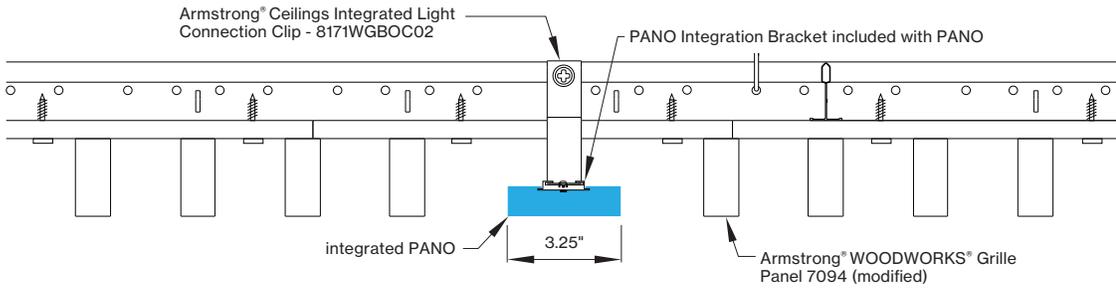

WWG - ARMSTRONG® WOODWORKS® GRILLE PANELS cont'd

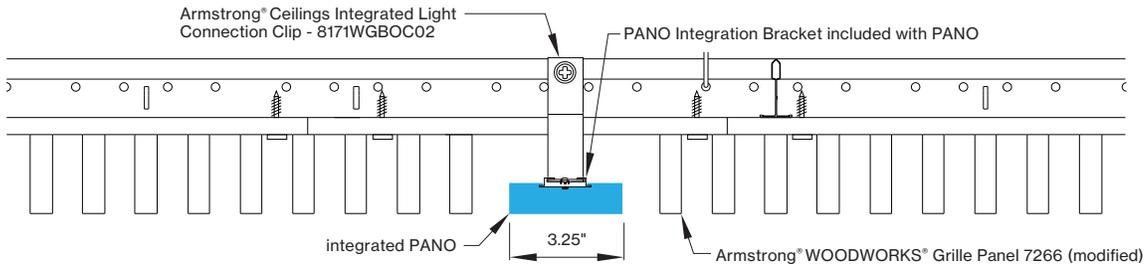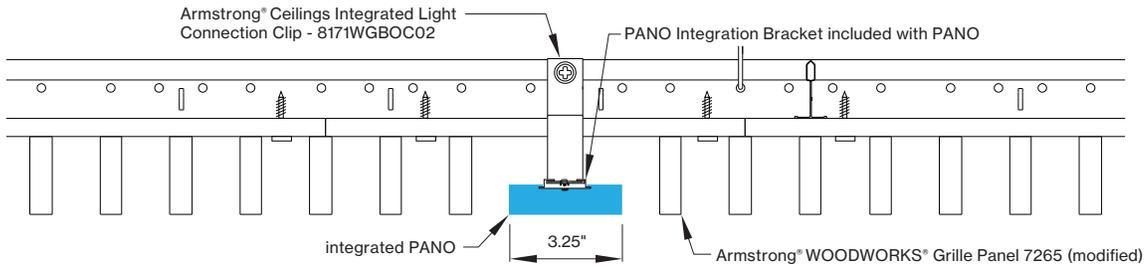

**PANO mounting instructions**

Get access to the PANO mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/pano>

